




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification ⁵ : H01Q 11/02, 11/08, 1/36 H01Q 1/38, 25/00, 1/00 H01Q 13/08, 21/00, 21/22 H01Q 25/04</p>	A1	<p>(11) International Publication Number: WO 93/11582</p> <p>(43) International Publication Date: 10 June 1993 (10.06.93)</p>
<p>(21) International Application Number: PCT/US92/09439</p> <p>(22) International Filing Date: 4 November 1992 (04.11.92)</p> <p>(30) Priority data: 07/798,700 26 November 1991 (26.11.91) US</p> <p>(71) Applicant: GEORGIA TECH RESEARCH CORPORATION [US/US]; 400 10th Street, N.W., Centennial Research Building, Atlanta, GA 30332-0415 (US).</p> <p>(72) Inventors: WANG, Johnson, J., H. ; 445 Cove Drive, Marietta, GA 30067 (US). TRIPP, Victor, K. ; 4396 Lake Ivanhoe Drive, Tucker, GA 30084 (US).</p>	<p>(74) Agent: GARDNER, Arthur, A.; Hurt, Richardson, Garner, Todd & Cadenhead, 999 Peachtree Street, N.E., Suite 1400, Atlanta, GA 30309-3999 (US).</p> <p>(81) Designated States: CA, JP, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, SE).</p> <p>Published <i>With international search report.</i></p>	

(54) Title: COMPACT BROADBAND MICROSTRIP ANTENNA

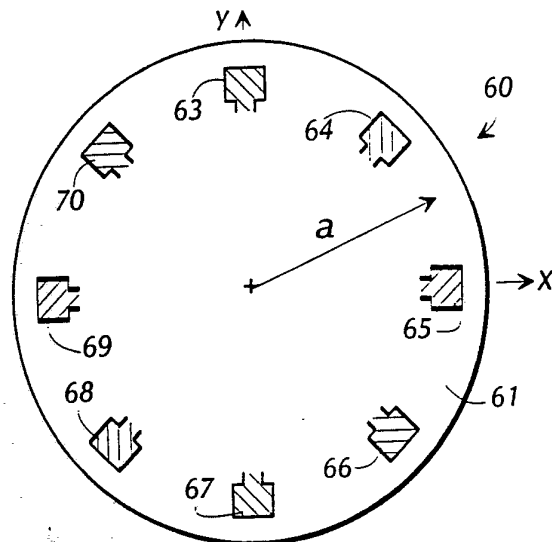

(57) Abstract

Arrangements of compact broadband microstrip antennas are disclosed. Each arrangement comprises a dielectric material (32, 62) with the microstrip antennas mounted to one side and a ground surface (GP) on the opposite side. A first arrangement comprises a closed array of antenna elements (63-70) electrically driven out of phase from one another to excite one or more spiral modes. A second arrangement comprises one or more antenna elements arranged on a magnetic substrate (73) which has a relative permittivity approximately equal to its relative permeability. In a third arrangement, the microstrip antenna operates in a single mode and radiation from other modes is suppressed by varying the spacing above the ground plane (GP) in the radiation zones so that only radiation in the desired zones is fostered. In a fourth arrangement, a spiral mode antenna element (21) is spaced between $1/60$ and $1/2$ wavelengths from the ground surface (GP) throughout a multioctave operating frequency range. The substrate (32) has $\epsilon_r \approx 1.0$ and the antenna is driven by a near-perfect impedance-matched feed network.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	FR	France	MR	Mauritania
AU	Australia	GA	Gabon	MW	Malawi
BB	Barbados	GB	United Kingdom	NL	Netherlands
BE	Belgium	GN	Guinea	NO	Norway
BF	Burkina Faso	GR	Greece	NZ	New Zealand
BG	Bulgaria	HU	Hungary	PL	Poland
BJ	Benin	IE	Ireland	PT	Portugal
BR	Brazil	IT	Italy	RO	Romania
CA	Canada	JP	Japan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SK	Slovak Republic
CI	Côte d'Ivoire	LJ	Liechtenstein	SN	Senegal
CM	Cameroon	LK	Sri Lanka	SU	Soviet Union
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	MC	Monaco	TG	Togo
DE	Germany	MG	Madagascar	UA	Ukraine
DK	Denmark	ML	Mali	US	United States of America
ES	Spain	MN	Mongolia	VN	Viet Nam
FI	Finland				

COMPACT BROADBAND MICROSTRIP ANTENNA

This invention was made with partial Government support under a contract from the U.S. Air Force. The Government has certain rights in the invention.

CROSS-REFERENCE TO RELATED APPLICATION

This application is a continuation-in-part of U.S. Patent Application Serial No. 07/695,686 filed May 3, 1991 for "MULTI-OCTAVE SPIRAL-MODE MICROSTRIP ANTENNA".

TECHNICAL FIELD

The present invention relates generally to antennas, and more particularly relates to microstrip antennas.

BACKGROUND OF THE INVENTION

In many antenna applications, for example such as for use with aircraft and vehicles, an antenna with a broad bandwidth is required. For such applications, the so-called "frequency-independent antenna" ("FI antenna") commonly has been employed. See for example, V. H. Rumsey, Frequency Independent Antennas, Academic Press, New York, NY, 1966. Such frequency-independent antennas typically have a radiating or driven element with spiral, or log-periodic structure that enables the frequency-independent antenna to transmit and receive signals over a wide band of frequencies, typically on the order of a 9:1 ratio or more (a bandwidth of 900%). For example, European Patent Application No. 86301175.5 of R.H. DuHamel entitled "Dual Polarized Sinuous Antennas", published October 22, 1986, publication No. 0198578 (See

- 2 -

also U.S. Patent No. 4,658,262 dated April 14, 1987), discloses frequency-independent antennas with a log-periodic structure called "sinuous."

In a conventional frequency-independent antenna, 5 a lossy cylindrical cavity is positioned to one side of the antenna element so that when transmitting, energy effectively is radiated outwardly from the antenna only from one side of the antenna element (the energy radiating from the other side of the antenna element being 10 dissipated in the cavity). However, high-performance aircraft, and other applications as well, require that the antenna be mounted substantially flush with its exterior surface, in this case the skin of the aircraft. This undesirably requires that the cavity portion of the 15 frequency-independent antenna be mounted within the structure of the aircraft, necessitating that a substantial hole be formed therein to accommodate the cylindrical cavity, which typically is at least two inches deep and several inches in diameter. Also, the use of a 20 lossy cavity to dissipate radiation causes about half of the radiated power to be lost, requiring a greater power input to effect a given level of power radiated outwardly from the frequency-independent antenna.

In recent years the so-called "microstrip patch 25 antenna" has been developed. See for example, U.S. Patent Reissue No. 29,911 of Munson (a reissue of U.S. Patent No. 3,921,177) and U.S. Patent Reissue No. 29,296 of Krutsinger, et al. (a reissue of U.S. Patent No. 3,810,183). In a typical microstrip patch antenna, a thin 30 metal patch, usually of circular or rectangular shape, is placed adjacent to a ground plane and is spaced a small distance therefrom by a dielectric spacer. Microstrip patch antennas have generally suffered from having a narrow useful bandwidth, typically less than 10%.

- 3 -

Co-pending U.S. patent application serial no. 07/695,686 recites a multi-octave spiral-mode microstrip antenna which overcomes many of the prior art limitations. This spiral-mode antenna approaches the 5 bandwidth of frequency-independent antennas and is nearly flushly mounted above a ground plane. However, multi-mode operation of a spiral-mode microstrip antenna requires the spiral to be of circumference at least $m\lambda$, where m is the highest desired mode and λ is the wavelength. Thus, the 10 spiral diameter can become undesirably large, especially at lower frequencies.

Microstrip patch array antennas have also been known in the art. See, for example, Munson, R.E., Conformal Microstrip Antennas and Microstrip Phased 15 Arrays, IEEE Transactions on Antennas and Propagation, p. 74 (Jan. 1974). The Munson article discusses an array of rectangular elements. However, known microstrip arrays, including the Munson design, generally are electrically large (i.e., the antenna is relatively large 20 in comparison with the wavelength of the operating frequency), having individual elements of approximately one-half wavelength in diameter and spaced from one another a distance slightly greater than their diameters.

U.S. Patent No. 4,766,444 of Conroy et al relates 25 to a conformal "cavity-less" antenna having an array of single-arm spiral elements driven in unison and which are aligned linearly along an outwardly-curved surface. A lossy hex-cell structure spaces the spiral elements away from the ground plane and takes the place of the typical 30 cavity. The resulting antenna is disclosed as being suited for use as an interferometer and tends to suffer from having a narrow useful bandwidth. Again this is an electrically large array.

Accordingly, it can be seen that a need yet

-4-

remains for an antenna which has a low profile, has a broad bandwidth relative to prior antennas, and is small in physical size. It is the provision of such an antenna that the present invention is primarily directed.

5

SUMMARY OF THE INVENTION

Briefly described, the present invention comprises a compact broadband microstrip antenna. In a 10 first preferred form, the invention comprises a microstrip structure for mounting to one side of a ground plane or other surface, the antenna comprising a closed (typically circular) array of antenna elements, each element positioned to one side of a substrate for spacing the 15 elements a selected distance from the ground plane, the substrate having a low dielectric constant. The elements are adapted to be electrically driven out of phase from one another to excite spiral modes.

Preferably, the closed array comprises a circular 20 arrangement of four or more elements, each element being made from a thin metal foil. Preferably, the substrate has a dielectric constant of between 1 and 4.5. Also, the thickness of the substrate is carefully selected to get near maximum gain at a particular wavelength, with the 25 substrate having a thickness typically in the range of 0.1 to 0.30 inches for microwave frequencies of 2 to 18 GHz. The substrate thickness for other frequencies is determined by the frequency scaling method. Also, a loading material can be positioned adjacent the antenna 30 elements.

With this construction, an antenna is provided which can be mounted externally to a structure and which can be conformed to the surface thereof. Also, the antenna exhibits a fairly broad bandwidth, typically on 35 the order of 300%. This design is based on the discovery

-5-

by the applicants that the ground plane of a microstrip antenna is compatible with the spiral modes of the antenna. In this regard, the individual elements of the closed array are electrically driven out of phase with one another in a manner to cause the aggregate antenna to generate a beam pattern according to a desired spiral mode or modes, for example, modes $m=1$ and $m=2$.

In a second preferred form, the invention comprises a microstrip antenna for mounting to one side of a ground plane or other surface, the antenna comprising one or more antenna elements positioned to one side of a magnetic substrate for spacing the antenna elements a selected distance from the ground plane. The magnetic substrate is chosen to have a relative permittivity which is roughly equal to its relative permeability. This allows the antenna to generate multiple spiral modes effectively, without the ill-effects of having a substrate with a high dielectric constant.

In a third preferred form, the present invention comprises a microstrip antenna for mounting to one side of a ground plane and includes one or more antenna elements positioned to one side of a substrate. Particularly, the antenna is adapted for operating in a particular mode, for example mode $m=2$. To this end, radiation in the radiation zone for the $m=1$ mode is suppressed with a relatively close spacing of the antenna element relative to the ground plane. The mode $m=2$ is fostered by having a sufficiently large spacing between the antenna element and the ground plane in the $m=2$ radiation zone. This takes advantage of the fact that an antenna radiates in radiation zones roughly corresponding to circles having circumferences equal to $m\lambda$, where λ is the wavelength and m is the radiation mode or spiral mode. Thus, an antenna tends to radiate in the first radiation zone for mode $m=1$ and radiates at a second, outer radiation zone for mode

-6-

m=2. By selectively varying the spacing between the ground plane and the antenna element in these various radiation zones, the radiation in the m=1 mode can be suppressed, while fostering radiation in the mode m=2. Of course, it is possible to reverse this so that the spacing suppresses radiation in the mode m=2 and fosters radiation in the mode=1 region, although in many instances there is no need to do this because it is possible to eliminate the mode m=2 radiation by truncating the antenna element so that there is no radiation zone which is large enough to support mode m=2 radiation.

In another preferred form the present invention comprises a multioctave spiral-mode microstrip antenna system for mounting to one side of, or including, a ground surface. The antenna system includes an antenna having a spiral-mode antenna element and a substrate positioned to one side of the antenna element for spacing the antenna element a selected distance from the ground surface, the selected distance being between $1/60$ and $1/2$ wavelengths throughout the multioctave operating frequency range. The substrate has a relative dielectric constant of between 1.0 and 2.0, preferably as close to 1.0 as possible. The antenna system also includes a feed network with a near-perfect impedance matching with the spiral mode antenna element to excite the desired spiral modes (with the effect of the ground plane incorporated in the impedance matching).

These arrangements are quite compact and efficient. Also, the capability of selectively operating in one mode, or in several modes, allows the antenna to be useful in beam steering and null steering.

Accordingly, it is a primary object of the present invention to provide a compact antenna which has a fairly broad bandwidth performance, while having a low profile.

It is another object of the present invention to

-7-

provide a microstrip antenna which has an improved bandwidth.

It is another object of the present invention to provide an antenna having a small aperture.

5 It is another object of the present invention to provide an antenna capable of beam and null steering.

Other objects, features, and advantages of the present invention will become apparent upon reading the following specification in conjunction with the
10 accompanying drawing figures.

BRIEF DESCRIPTION OF THE DRAWING FIGURES

Fig. 1 is a plan view of a microstrip antenna in
15 a preferred form of the invention.

Fig. 2A is a schematic, partially sectional side view of the antenna of Fig. 1.

Fig. 2B is a schematic, partially sectional side view of a portion of the antenna of Fig. 2A.

20 Fig. 3 is a schematic view of a feed for driving the antenna of Fig 1.

Figs. 4A and 4B are plan views of modified forms of the antenna of Fig. 1, depicting sinuous antenna elements.

25 Figs. 5A and 5B are plan views of modified forms of the antenna of Fig. 1, depicting log-periodic tooth antenna elements.

Fig. 6 is a plan view of a modified form of the antenna of Fig. 1, depicting a rectangular spiral antenna
30 element.

Figs. 7 and 8 are plan views of modified forms of the antenna on Fig. 1, depicting Archimedean and equiangular spiral antenna elements, respectively.

Figs. 9A and 9B and 10A and 10B are schematic
35 illustrations of mathematical models used to analyze the theoretical basis of the antenna of Fig. 1.

Figs. 11A and 11B are graphs of experimental

-8-

laboratory results of the disruptive effect of the dielectric substrate (when the dielectric constant is great) on the radiation pattern of an antenna as shown in Fig. 1.

5 Fig. 12 is a graph of laboratory results comparing antennas according to the present invention with a prior cavity-loaded spiral antenna.

Fig. 13 is a graph of laboratory results for the antenna of Fig. 1 showing the effect of positioning the
10 antenna element on antenna gain at various spacings from the ground plane for three different operating frequencies.

Fig. 14 is a graph of antenna radiation patterns, specifically, spiral mode patterns (for $n=1$, $n=2$, etc.).

Fig. 15 is a schematic plan view of an antenna
15 according to another preferred form and having closed array elements.

Fig. 16 is a side sectional view of the antenna of Fig. 15.

Fig. 17A and 17B are graphs of radiation patterns
20 for modes $m=1$ and $m=2$, respectively.

Fig. 18 is a schematic plan view of an alternative embodiment in which concentric circular arrays of elements are arranged.

Fig. 19 is a schematic illustration of a tunable
25 multiple-resonance-frequency microstrip antenna switched by PIN diodes.

Fig. 20 is a schematic illustration showing that a substrate material used in a spiral-mode microstrip antenna with equal relative permittivity and permeability.

30 Figs. 21A and 21B show mode-2 antennas with a non-constant spacing above the ground plane.

- 9 -

DETAILED DESCRIPTION

As noted above, the present application is a continuation-in-part of co-pending U.S. application serial 5 no. 07/695,686. Sections numbered 1-3 below are drawn substantially verbatim from the above-identified application and illustrate some of the principles of the present invention, particularly including the principles of how the antenna and its elements are mounted and spaced 10 above a ground plane. The sections that follow numbered sections 1-3 provide the remainder of the disclosure of the present invention, including how the antenna is comprised of phased array elements, or uses a magnetic substrate material, or has a non-constant spacing between 15 the antenna element(s) and the substrate as a function of radius.

1. The Physical Structure of the Mounting of the Antenna

20 Referring now in detail to the drawing figures, wherein like reference characters represent like parts throughout the several views, Figs. 1, 2A and 2B show a multi-octave microstrip antenna 20, according to a preferred form of the invention and shown mounted to one 25 side of a ground plane GP. The antenna 20 includes an antenna element 21 comprising a very thin metal foil 21a, preferably copper foil, and a thin dielectric backing 21b. The antenna element foil 21a shown in Figs. 1, 2A and 2B has a spiral shape or pattern including first and 30 second spiral arms 22 and 23. Spiral arms 22 and 23 originate at terminals 26 and 27 roughly at the center of antenna element 21. The spiral arms 22 and 23 spiral outwardly from the terminals 26 and 27 about each other and terminate at tapered ends 28 and 29, thereby roughly 35 defining a circle having a diameter D and a corresponding

-10-

circumference of πD . The antenna element foil 21a is formed from a thin metal foil or sheet of copper by any of well known means, such as by machining, stamping, chemical etching, etc. Antenna element foil 21a has a thickness t of less than 10 mils or so, although other thicknesses obviously can be employed as long as it is thin in terms of the wavelength, say for example, 0.01 wavelength or less. While the invention is disclosed herein in connection with a separate ground plane GP, it will be obvious to those skilled in the art that the antenna can be constructed to include its own ground plane, making the antenna suitable for mounting on non-conducting surfaces, e.g., on engineering plastics and composites.

The thin antenna element 21 is flexible enough to be mounted to generally nonplanar, contoured shapes of the ground plane, although in Figs. 2A and 2B the ground plane is represented as being truly planar. The antenna element foil 21a is uniformly spaced a selected distance d (the standoff distance) from the ground plane GP by a dielectric spacer 32 positioned between the antenna element 21 and the ground plane GP. The dielectric spacer 32 preferably has a low dielectric constant, in the range of 1 to 4.5, as will be discussed in more detail below. The dielectric spacer 32 is generally in the form of a disk and is sized to be slightly smaller in diameter than the antenna element 21. The thickness d of the dielectric spacer 32 typically is much greater than the thickness of the dielectric backing 21b of the antenna element 21. The thickness d of spacer 32 typically is in the neighborhood of 0.25" for microwave frequencies. However, the specific thickness chosen to provide a maximum gain for a given frequency should be no greater than one-half of the wavelength of the frequency in the medium of the dielectric spacer.

-11-

A loading 33 comprising a microwave absorbing material, such as carbon-impregnated foam, in the shape of a ring is positioned concentrically about dielectric spacer 32 and extends partially beneath antenna element 5 21. Alternatively, a paint laden with carbon can be applied to the outer edge of the antenna element. Also, the antenna element can be provided with a peripheral shorting ring positioned adjacent and just outside the spiral arms 22 and 23 and the peripheral shorting ring 10 (unshown) can be painted with the carbon-laden paint.

First and second coaxial cables 36 and 37 extend through an opening 38 in the ground plane GP for electrically coupling the antenna element 21 with a feed source, driver or detector. The coax cables 36 and 37 15 include central shielded electric cables 42 and 43 which are respectively connected with the terminals 26 and 27. The outer shieldings of the coaxial cables 36 and 37 are electrically coupled to each other in the vicinity of the antenna element, as shown in Fig. 2B. As shown 20 schematically in Fig. 3, this electrical coupling of the shielding of the coaxial cables can be accomplished by soldering a short electric cable 44 at its ends to each of the coaxial cables 36 and 37.

Preferably, as shown in Fig. 3, the coaxial 25 cables 36 and 37 are connected to a conventional RF hybrid unit 46 which is in turn connected with a single coax cable input 47. The function of the RF hybrid unit 46 is to take a signal carried on the input coax cable 47 and split it into two signals, with one of the signals being 30 phase-shifted 180° relative to the other signal. The phase-shifted signals are then sent out through the coaxial cables 36 and 37 to the antenna element 21. By providing two signals, phase-shifted 180° relative to each other, to the two antenna element arms, a voltage 35 potential is developed across the terminals 26 and 27

-12-

corresponding to the waveform carried along the coaxial cables 36, 37 and 47, causing the antenna to radiate primarily in a $n=1$ mode (although some components of higher-order modes can be present). As an alternative, a balun may be used to split the input signal into first and second signals, with one of the signals being delayed relative to the other. A balun can be used to feed the antenna for operating in the $n=1$ mode (single beam pattern). The RF hybrid circuit can be used for generating higher-order modes, e.g., $n=2$. For generating these higher-order modes, 4, 6, or 8 antenna element arms are used in conjunction with a corresponding number of feed terminals.

The dissipative loading 33 can be done away with by using a substrate with a very low relative dielectric constant, preferably close to unity (1.0), and by using a feed network with a near-perfect impedance match with the arms of the spiral to excite the desired spiral modes (with the effect of the ground plane incorporated in the impedance matching).

Fig. 4A shows an alternative embodiment of the antenna of Fig. 1, with the spiral arms 22 and 23 of Fig. 1 being replaced with sinuous arms 52 and 53. While a two-arm sinuous antenna element is shown in Fig. 4A, a four-arm sinuous antenna element can be provided if higher-order modes are desired, as shown in Fig. 4B.

Fig. 5A shows a modified form of the antenna element 21 in which the spiral arms 22 and 23 are replaced with log-periodic toothed arms 56 and 57. The toothed antenna element illustratively shown in Fig. 5A includes toothed arms which have linear segments which are perpendicular to each other, i.e., the "teeth" of each arm are generally rectangular. Alternatively, the teeth can be smoothly contoured to eliminate the sharp corners at each tooth. Also, the teeth can be curved as shown in Fig. 5B.

-13-

Fig. 6 shows another modified form of the antenna element of Fig. 1 in which the spiral arms 22 and 23 are replaced with rectangular spiral arms 58 and 59. Each of the spiral arms is in the form of a spiraling square, as compared with the rounded spiral of the antenna element of Fig. 1. Figs. 7 and 8 show that the spiral pattern of Fig. 1 can be provided as an "Archimedean spiral" as shown in Fig. 7 or as an "equiangular spiral" as shown in Fig. 8.

10 2. Theoretical Basis of the Mounting Arrangement

The following discussion represents the results of a theoretical study by applicants establishing the viability of the invention. Experimental verification of the theoretical basis will be provided in the section immediately following this one.

The basic planar spiral antenna, which consists of a planar sheet of an infinitely large spiral structure, radiates on both sides of the spiral in a symmetric manner. When radiating in $n=1$ mode, most of the radiation occurs on a circular ring around the center of the spiral whose circumference is approximately one wavelength. As a result, one can truncate the spiral outside this active region without too much disruption to its pattern, or dissipative loss to its radiated power.

Figs. 9A and 9B depict an infinite, planar spiral backed by a ground plane. The spiral mode fields in Region ℓ can be decomposed into TE and TM fields in terms of vector potentials F_ℓ and A_ℓ as follows:

5

$$F_\ell = \hat{z} F_\ell \psi_\ell \quad \text{TE Solution} \quad (1)$$

$$A_\ell = \hat{z} A_\ell \psi_\ell \quad \text{TM Solution} \quad (2)$$

10

In Region 1 where modes propagate in the $+z$ direction, we have

$$\psi_\ell = e^{jn\phi} \int_0^\infty g_\ell(k_\rho) J_n(k_\rho \rho) e^{-jk_{z\ell} z} k_\rho dk_\rho \quad (3)$$

15

$$k_{z\ell} = [k_\ell^2 - k_\rho^2]^{1/2}$$

$$k_\ell = \omega(\epsilon_o \mu_o)^{1/2} \quad (4)$$

20 and the explicit expressions for the fields in region 1, where $\ell=1$, are given by:

$$E_{\rho\ell} = \frac{A_\ell}{j\omega\epsilon_\ell} \frac{\partial^2 \psi_\ell}{\partial \rho \partial z} - \frac{F_\ell}{\rho} \frac{\partial \psi_\ell}{\partial \phi}$$

25

$$= e^{jn\phi} \int_0^\infty g(k_\rho) e^{-jk_{z\ell} z} \left[\frac{-A_\ell}{\omega\epsilon_o} k_\rho J_n'(k_\rho \rho) k_{z\ell} - \frac{F_\ell jn}{\rho} J_n(k_\rho \rho) \right] k_\rho dk_\rho \quad (5)$$

30

35

$$\begin{aligned}
 5 \quad E_{\phi\ell} &= \frac{A_\ell}{j\omega\epsilon_{o\rho}} \frac{\partial^2 \Psi_\ell}{\partial\phi\partial z} + F_\ell \frac{\partial\Psi_\ell}{\partial\rho} \\
 &= e^{jn\phi} \int_0^\infty g(k_\rho) e^{-jk_z\ell z} \left[\frac{A_\ell n k_{z\ell}}{j\omega\epsilon_{o\rho}} J_n(k_\rho\rho) + F_\ell k_\rho J_n'(k_\rho\rho) \right] k_\rho dk_\rho \quad (6)
 \end{aligned}$$

$$\begin{aligned}
 10 \quad E_{z\ell} &= \frac{A_\ell}{j\omega\epsilon_o} \left(\frac{\partial^2}{\partial z^2} + k_\ell^2 \right) \Psi_\ell \\
 &= \frac{A_\ell}{j\omega\epsilon_o} \int_0^\infty g(k_\rho) e^{-jk_z\ell z} \left[-k_{\ell z}^2 + k_\ell^2 \right] J_n(k_\rho\rho) k_\rho dk_\rho \quad (7)
 \end{aligned}$$

$$\begin{aligned}
 15 \quad H_{\rho\ell} &= \frac{A_\ell}{\rho} \frac{\partial\Psi_\ell}{\partial\phi} + \frac{F_\ell}{j\omega\mu_\ell} \frac{\partial^2\Psi_\ell}{\partial\rho\partial z} \\
 20 \quad &= e^{jn\phi} \int_0^\infty g(k_\rho) e^{-jk_z\ell z} \left[\frac{A_\ell jn}{\rho} J_n(k_\rho\rho) - \frac{F_\ell k_{z\ell} k_\rho}{\omega\mu_\ell} J_n'(k_\rho\rho) \right] k_\rho dk_\rho \quad (8)
 \end{aligned}$$

$$\begin{aligned}
 25 \quad H_{\phi\ell} &= -A_\ell \frac{\partial\Psi_\ell}{\partial\rho} + \frac{F_\ell}{j\omega\mu_\ell\rho} \frac{\partial^2\Psi_\ell}{\partial\phi\partial z} \\
 &= e^{jn\phi} \int_0^\infty g(k_\rho) e^{-jk_z\ell z} \left[-A_\ell k_\rho J_n'(k_\rho\rho) - \frac{F_\ell n k_{z\ell}}{j\omega\mu_\ell\rho} J_n(k_\rho\rho) \right] k_\rho dk_\rho \quad (9)
 \end{aligned}$$

$$30 \quad H_{z\ell} = \frac{F_\ell}{j\omega\mu_\ell} \left(\frac{\partial^2}{\partial z^2} + k_\ell^2 \right) \Psi_\ell$$

$$= \frac{F_\ell}{j\omega\mu_\ell} e^{jn\phi} \int_0^\infty g(k_\rho) e^{-jk_z z} \left[-k_{z\ell}^2 + k_\ell^2 \right] J_n(k_\rho) k_\rho dk_\rho \quad (10)$$

5 In Region 2, modes propagating in both +z and -z directions exist and therefore the vector potentials are

$$F_2^\pm = \hat{z} F_2^\pm \Psi_2^\pm \quad \text{TE solution} \quad (11)$$

$$10 \quad A_2^\pm = \hat{z} A_2^\pm \Psi_2^\pm \quad \text{TM solution} \quad (12)$$

where

$$\Psi_2^\pm = e^{jn\phi} \int_0^\infty g(k_\rho) J_n(k_\rho) e^{\mp jk_z z} k_\rho dk_\rho \quad (13)$$

15 The explicit expressions for the fields in Region 2 are as follows.

$$E_{\rho 2} = e^{jn\phi} \int_0^\infty g(k_\rho) [-A_2^+ e^{-jk_z z} + A_2^- e^{jk_z z}] \frac{k_z k_\rho^2}{\omega \epsilon_0} J_n'(k_\rho) dk_\rho$$

$$20 \quad + e^{jn\phi} \int_0^\infty g(k_\rho) [-F_2^+ e^{-jk_z z} - F_2^- e^{jk_z z}] \frac{jn k_\rho}{\rho} J_n(k_\rho) dk_\rho \quad (14)$$

$$E_{\phi 2} = e^{jn\phi} \int_0^\infty g(k_\rho) [A_2^+ e^{-jk_z z} - A_2^- e^{jk_z z}] \frac{nk_z k_\rho}{j\omega \epsilon_0 \rho} J_n(k_\rho) dk_\rho$$

$$25 \quad + e^{jn\phi} \int_0^\infty g(k_\rho) [F_2^+ e^{-jk_z z} + F_2^- e^{jk_z z}] k_\rho^2 J_n'(k_\rho) dk_\rho \quad (15)$$

$$E_{z2} = \frac{1}{j\omega \epsilon_0} \int_0^\infty g(k_\rho) J_n(k_\rho) [A_2^+ e^{-jk_z z} + A_2^- e^{jk_z z}] k_\rho^3 dk_\rho \quad (16)$$

$$30 \quad H_{\rho 2} = e^{jn\phi} \int_0^\infty g(k_\rho) [A_2^+ e^{-jk_z z} + A_2^- e^{jk_z z}] \frac{jn k_\rho}{\rho} J_n(k_\rho) dk_\rho$$

$$+ e^{jn\phi} \int_0^\infty g(k_\rho) [-F_2^+ e^{-jk_z z} + F_2^- e^{jk_z z}] \frac{k_z k_\rho^2}{\omega \mu_0} J_n'(k_\rho) dk_\rho \quad (17)$$

$$35 \quad H_{\phi 2} = e^{jn\phi} \int_0^\infty g(k_\rho) [-A_2^+ e^{-jk_z z} - A_2^- e^{jk_z z}] k_\rho^2 J_n'(k_\rho) dk_\rho$$

$$+ e^{jn\phi} \int_0^{\infty} g(k_\rho) [F_2^+ e^{-jk_z z} - F_2^- e^{jk_z z}] \frac{nk_z k_\rho}{j\omega\mu_0 \rho} J_n(k_\rho \rho) dk_\rho \quad (18)$$

$$H_{z2} = \frac{1}{j\omega\mu_0} \int_0^{\infty} g(k_\rho) J_n(k_\rho \rho) [F_2^+ e^{-jk_z z} + F_2^- e^{jk_z z}] k_\rho^3 dk_\rho \quad (19)$$

5 By matching the boundary conditions at $z=0$ (where tangential E and H are continuous in the aperture region) and $z=-d$ (where tangential E vanishes) and by requiring the fields satisfy the impedance conditions

$$10 \quad E_1 = j\eta H_1, \quad E_2^+ = j\eta H_2^+, \quad E_2^- = -j\eta H_2^- \quad (20)$$

we obtain the necessary and sufficient conditions for the spiral modes as follows:

$$15 \quad A_1 = A_2^+ - A_2^-$$

$$F_1 = F_2^+ + F_2^-$$

$$20 \quad -A_2^+ e^{jk_z d} + A_2^- e^{-jk_z d} = 0$$

$$F_2^+ e^{jk_z d} + F_2^- e^{-jk_z d} = 0$$

$$F_1 = -j\eta A_1$$

$$25 \quad F_2^+ = -j\eta A_2^+$$

$$F_2^- = j\eta A_2^- \quad (21)$$

30 There are six unknowns in the above seven equations. However, the seven equations are not totally independent, and can be reduced to the following five independent equations.

$$35 \quad F_1 = F_2^+ + F_2^-$$

$$F_2^+ e^{jk_z d} + F_2^- e^{-jk_z d} = 0$$

$$F_1 = -j\eta A_1$$

$$F_2^+ = -j\eta A_2^+$$

$$F_2^- = j\eta A_2^-$$

5

Equations (22) have six parameters in the five equations. Let, say A_1 , be given, then we can solve for all the other five parameters. Thus the spiral radiation modes can be supported by the structure of an infinite planar spiral backed by a ground plane as shown in Figure 1. This finding is the design basis of the multi-octave spiral-mode microstrip antennas disclosed herein.

In practice, the spiral is truncated. The residual current on the spiral beyond the mode-1 active region, therefore, faces a discontinuity where the energy is diffracted and reflected. The diffracted and reflected power due to the truncation of the spiral, as well as possible mode impurity at the feed point, is believed to degrade the radiation pattern. Indeed, this is consistent with what we have observed.

To examine the effect of a dielectric substrate on the spiral microstrip antenna, we study the simpler problem of an infinite spiral between two media, as shown in Figs. 10A and 10B.

Region 1 is usually free space ($\epsilon_1 = \epsilon_0$) where radiation is desired. Region 2 is an infinite dielectric medium with ϵ_2 and μ_0 . Following the method of Section I, we express the fields in both Region 1 and 2 in terms of electric and magnetic vector potentials F_ℓ and A_ℓ .

The explicit expressions for fields in Region ℓ ($\ell=1$ or 2) are

$$E_{\rho\ell} = \frac{A_\ell}{j\omega\epsilon_\ell} \frac{\partial^2 \psi_\ell}{\partial \rho \partial z} - \frac{F_\ell}{\rho} \frac{\partial \psi_\ell}{\partial \phi}$$

$$= e^{jn\phi} \int_0^\infty g(k_\rho) e^{-jk_z z} \left[\frac{-A_\ell}{\omega\epsilon_\ell} k_\rho J_n'(k_\rho \rho) k_{z\ell} - \frac{F_\ell jn}{\rho} J_n(k_\rho \rho) \right] k_\rho dk_\rho$$

$$\begin{aligned}
 5 \quad E_{\phi\ell} &= \frac{A_\ell}{j\omega\epsilon_\ell\rho} \frac{\partial^2 \Psi_\ell}{\partial\phi\partial z} + F_\ell \frac{\partial\Psi_\ell}{\partial\rho} \\
 &= e^{jn\phi} \int_0^\infty g(k_\rho) e^{-jk_z\ell z} \left[\frac{A_\ell n k_{z\ell}}{j\omega\epsilon_\ell\rho} J_n(k_\rho\rho) + F_\ell k_\rho J_n'(k_\rho\rho) \right] k_\rho dk_\rho \quad (24)
 \end{aligned}$$

$$\begin{aligned}
 10 \quad E_{z\ell} &= \frac{A_\ell}{j\omega\epsilon_\ell} \left(\frac{\partial^2}{\partial z^2} + k_\ell^2 \right) \Psi_\ell \\
 &= \frac{A_\ell}{j\omega\epsilon_\ell} \int_0^\infty g(k_\rho) e^{-jk_z\ell z} \left[-k_{z\ell}^2 + k_\ell^2 \right] J_n(k_\rho\rho) k_\rho dk_\rho \quad (25)
 \end{aligned}$$

$$\begin{aligned}
 15 \quad H_{\rho\ell} &= \frac{A_\ell}{\rho} \frac{\partial\Psi_\ell}{\partial\phi} + \frac{F_\ell}{j\omega\mu_\ell\rho} \frac{\partial^2\Psi_\ell}{\partial\rho\partial z} \\
 20 \quad &= e^{jn\phi} \int_0^\infty g(k_\rho) e^{-jk_z\ell z} \left[\frac{A_\ell jn}{\rho} J_n(k_\rho\rho) - \frac{F_\ell k_{z\ell} k_\rho}{\omega\mu_\ell} J_n'(k_\rho\rho) \right] k_\rho dk_\rho \quad (26)
 \end{aligned}$$

$$\begin{aligned}
 25 \quad H_{\phi\ell} &= -A_\ell \frac{\partial\Psi_\ell}{\partial\rho} + \frac{F_\ell}{j\omega\mu_\ell\rho} \frac{\partial^2\Psi_\ell}{\partial\phi\partial z} \\
 &= e^{jn\phi} \int_0^\infty g(k_\rho) e^{-jk_z\ell z} \left[-A_\ell k_\rho J_n'(k_\rho\rho) - \frac{F_\ell n k_{z\ell}}{j\omega\mu_\ell\rho} J_n(k_\rho\rho) \right] k_\rho dk_\rho \quad (27)
 \end{aligned}$$

$$\begin{aligned}
 30 \quad H_{z\ell} &= \frac{F_\ell}{j\omega\mu_\ell} \left(\frac{\partial^2}{\partial z^2} + k_\ell^2 \right) \Psi_\ell \\
 &= \frac{F_\ell}{j\omega\mu_\ell} e^{jn\phi} \int_0^\infty g(k_\rho) e^{-jk_z\ell z} \left[-k_{z\ell}^2 + k_\ell^2 \right] J_n(k_\rho\rho) k_\rho dk_\rho \quad (28)
 \end{aligned}$$

35 Continuity of the tangential E field at $z=0$ in the aperture region requires

$$\frac{-A_1}{\omega \epsilon_1} k_{\rho z1} = \frac{A_2 k_{z2} k_{\rho}}{\omega \epsilon_2}$$

5

$$\frac{F_1 j n}{\rho} = \frac{F_2 j n}{\rho}$$

$$\frac{A_1 n k_{z1}}{j \omega \epsilon_1 \rho} = \frac{-A_2 n k_{z2}}{j \omega \epsilon_2 \rho}$$

10

$$F_1 k_{\rho} = F_2 k_{\rho} \quad (29)$$

Eq. (29) can be reduced to

15

$$\frac{-A_1 k_{z1}}{\epsilon_1} = \frac{A_2 k_{z2}}{\epsilon_2}$$

$$F_1 = F_2 \quad (30)$$

-The impedance condition

20

$$E_1 = j \eta_1 H_1 \quad (31)$$

requires

$$\frac{A_1}{\epsilon_1} = \frac{j \eta_1 F_1}{\mu_1}$$

25

$$-F_1 = j \eta_1 A_1 \quad (32)$$

which can be reduced to

$$F_1 = -j \eta_1 A_1 \quad (33)$$

30 Similarly,

$$E_2 = -j \eta_2 H_2 \quad (34)$$

requires

$$F_2 = j \eta_2 A_2 \quad (35)$$

35

Eqs. (30), (34) and (35) are constraints on A_1, F_1, F_2, A_2 , which we summarize as follows:

$$\frac{-A_1 k_{z1}}{\epsilon_1} = \frac{A_2 k_{z2}}{\epsilon_2}$$

$$F_1 = F_2$$

5

$$F_1 = -j\eta_1 A_1$$

$$F_2 = j\eta_2 A_2 \quad (36)$$

The four equations in (36) can not be satisfied simultaneously unless

$$\frac{\eta_1 \epsilon_1}{k_{z1}} = \frac{\eta_2 \epsilon_2}{k_{z2}} \quad (37)$$

or

$$\frac{k_1}{k_{z1}} = \frac{k_2}{k_{z2}} \quad (38)$$

15 or

$$\left[1 - \left(\frac{k_\rho}{k_1} \right)^2 \right]^{1/2} = \left[1 - \left(\frac{k_\rho}{k_2} \right)^2 \right]^{1/2} \quad (39)$$

We see that Eq. (39) can be satisfied only if

$$k_1 = k_2 \quad \text{or} \quad \epsilon_1 = \epsilon_2 \quad (40)$$

This means that the $m=1$ spiral mode cannot be supported by the dielectric-backed spiral shown in Figure 2 without significant components of higher-order modes. This finding explains why earlier efforts to design a broadband spiral microstrip antenna failed.

3. Experimental Results Verifying the Theoretical Basis of the Mounting Arrangement

The effect of the presence of high-dielectric-constant material on the performance of the antenna was studied in two ways: with and without a ground plane. To investigate the case of no ground plane,

both calculations and measurements were used. The basic conclusion was that patterns degrade in the presence of a dielectric substrate; the higher the dielectric constant, and the thicker the substrate, the more seriously the patterns degrade. Even though dielectric substrates cause pattern degradation, it is possible to design spiral microstrip antennas with acceptable performance over a narrower frequency band.

The case of dielectric substrates between the spiral and the ground plane was studied for materials of relatively small dielectric constant, the greatest being 4.37, and little degradation was found at these frequencies. The studies were conducted using the configuration of Figure 1 with a substrate of 0.063 inches of fiberglass, and for a substrate of 0.145 inches of air. In both of these configurations, the electrical spacing is the same (within 10%).

On the other hand, Figs. 11A and 11B show some disruptive effect on the mode-1 radiation patterns at 9 and 12 GHz for an antenna with $\epsilon=4.37$ (fiberglass) and a substrate thickness of $d=1/16$ inch. When the substrate thickness d is reduced to $1/32$ inch, the effect of the dielectric becomes larger, especially at lower frequencies. However, VSWR (voltage standing-wave ratio) remains virtually unaffected by the presence of the dielectric. We have thus demonstrated, both theoretically and experimentally, the disruptive effect of dielectric substrates on antenna patterns.

In many practical applications, the spiral microstrip antenna is to be mounted on a curved surface. To examine the effect of conformal mounting of the spiral microstrip antenna on a curved surface, we placed a 3-inch diameter spiral microstrip antenna on a half-cylinder shell with a radius of 6 inches and a length of 14 inches. The truncated spiral was placed 0.3-inch above

and conformal to the surface of the cylinder with a styrofoam spacer. A 0.5 inch-wide ring of microwave absorbing material was placed at the end of the truncated spiral, with half of the absorbing material lying inside 5 the spiral region and half outside it. The ring of absorbing material was 0.3-inch thick, thus filling the gap between the spiral antenna element and the cylinder surface.

The VSWR measurement of the spiral microstrip 10 antenna conformally mounted on the half-cylinder shell was below 1.5 between 3.6 GHz and 12.0 GHz, and was below 2.0 between 2.8 GHz and 16.5 GHz. Thus, a 330% bandwidth was achieved for VSWR of 1.5 or lower, and a 590% bandwidth for VSWR of 2.0 or lower was reached.

15 The measured radiation patterns over Θ on the y-z principal plane with $\Phi=90^\circ$ yielded good rotating-linear patterns obtained over a wide frequency bandwidth of 2-10 GHz. Measured radiation patterns on the x-z principal plane ($\Phi=0^\circ$) over Θ are of the same 20 quality. Thus, the spiral-mode microstrip antenna can be conformally mounted on a curved surface with little degradation in performance for the range of radius of curvature studied here.

Recently, a researcher has reported a theoretical 25 analysis which indicated that poor radiation patterns are due to the residual power after the electric current on spiral wires (not "complementary") has passed through the first-mode radiation zone which is on a centered ring about one wavelength in circumference. (H. Nakano et al., 30 "A Spiral Antenna Backed by a Conducting Plane Reflector", IEEE Trans. Ant. Prop., Vol. AP-34, pp. 791-796 (1986)). Thus, if one can remove the residual power from radiation, it should be possible to obtain excellent radiation patterns over a very wide bandwidth.

35 One technique for removing the residual power is to place a ring of absorbing material at the truncated

-24-

edge of the spiral outside the radiation zone. This scheme allows the absorption of the residual power which would radiate in "negative" modes, which cause deterioration of the radiation patterns, especially their axial ratio. This scheme is shown in Figs. 1 and 2A by the provision of the loading ring 33.

Performance tests were conducted for a configuration similar to that shown in Figure 1, except that the spiral was Archimedean as shown in Fig. 7, with a separation between the arms of about 1.9 lines per inch. The experimental results demonstrate that for a spacing d (standoff distance) of 0.145 inch, the impedance band is very broad -- more than 20:1 for a VSWR below 2:1. The band ends depend on the inner and outer terminating radii of the spiral. The feed was a broadband balun made from a 0.141 inch semi-rigid coaxial cable, which made a feed radius of 0.042 inch. It was necessary to create a narrow aperture in the ground plane in order to clear the balun. The cavity's radius was 0.20 inch, and its depth 20 inches. This aperture also affects the high frequency performance.

Other tests were performed using a log-spiral (equiangular spiral) 0.3 inch above a similar ground plane and balun. Both spirals, incidentally, were "complementary geometries".

The diameter of each spiral (the Archimedean and the equiangular) was 3.0 inches, with foam absorbing material (loading) extending from 1.25 to 1.75 inches from center. If this terminating absorber is effective enough, the antenna match can be extended far below the frequencies at which the spiral radiates significantly. More importantly, at the operating frequencies, the termination eliminates currents that would be reflected from the outer edge of the spiral and disrupt the desired pattern and polarization. These reflected waves are

-25-

sometimes called "negative modes" because they are mainly polarized in the opposite sense to the desired mode. Thus, their primary effect is to increase the axial ratio of the patterns.

5 For an engineering model, the Archimedean and equiangular antennas operate well from 2 to 14 GHz, a 7:1 band. It is expected that the detailed engineering required to produce a commercial antenna would yield excellent performance over most of this range. The gain
10 is higher than that of a 2.5" commercial lossy-cavity spiral antenna up through 12 GHz, as shown in Figure 12. (We believe that the dip at 4 GHz is an anomaly.) The increased gain of antennas of the present invention over a
15 relative lack of loss of radiated power from the underside of the spiral mode antenna elements. The spiral mode antenna element radiates to both sides, with radiation from the underside passing through the dielectric backing and the dielectric substrate relatively undiminished.
20 This radiation is reflected by the ground plane (sometimes more than once) and augments the radiation emanating from the upper side.

Fig. 12 also shows gain curves for a ground plane spacing of 0.3 inch. The Archimedean version of
25 this design demonstrates a gain improvement over the nominal loaded-cavity level of 4.5 dBi (with matched polarization) over a 5:1 band. The gain of the 0.145 inch spaced antenna is lower because the substrate was a somewhat lossy cardboard material rather than a light foam
30 used for the 0.3 inch example.

We have found that a decrease in thickness causes the band of high gain to move upwardly in frequency, subject to the limitation imposed by the inner truncation radius. Figure 13 shows gain plotted at several
35 frequencies as a function of spacing for a "substrate" of

-26-

air. At low frequencies, the spiral arms act more like transmission lines than radiators as they are moved closer to the ground plane. They carry much of their energy into the absorber ring, and the gain decreases.

5 For these types of antennas, we have found that efficient radiation generally can take place even when the spacing is far below the quarter wave "optimum". We have observed a gain enhancement over that of a loaded cavity for frequencies that produce a spacing of less than 1/20
10 wavelength. If one is willing to tolerate gain degradation down to 0 dBi at the low frequencies, as found in most commercial spirals, the spacing can be as small as 1/60th wavelength.

We investigated several configurations of edge
15 loading, most notably foam absorbing material and magnetic RAM (radar absorbing materials) materials. For the foam case, we compared log-spirals terminated with a simple circular truncation (open circuit) and terminated with a thin circular shorting ring. There was no discernable
20 difference in performance. The magnetic RAM absorber was tried on open-circuit Archimedean and log-spirals with spacings of 0.09 and 0.3 inches. The results show that the magnetic RAM is not nearly so well-behaved as the foam. In addition to the gain loss caused by the VSWR
25 spikes, the patterns showed a generally poor axial ratio, indicating that the magnetic RAM did not absorb as well as the foam. In our measurements, the loading materials were always shaped into a one-half-inch wide annulus, half within and half outside the spiral edge. The thickness
30 was trimmed to fit between the spiral and the ground plane, and in the very close configurations it was mounted on top of the spiral.

This disclosure presents an analysis, supported by experiments, of a multi-octave, frequency-independent
35 or spiral-mode microstrip antenna according to the present

-27

invention. It shows that the spiral-mode structure is compatible with a ground plane backing, and thus explains why and how the spiral-mode microstrip antenna works.

It is shown herein, both theoretically and 5 experimentally, that a high dielectric substrate has a disruptive effect on the radiation pattern, and therefore that a low-dielectric constant substrate is preferred in wideband microstrip antennas. This finding may explain why earlier attempts to develop a spiral microstrip 10 antenna have generally failed. It is also shown herein experimentally that a conformally mounted spiral microstrip antenna can achieve a frequency bandwidth of 6:1 or so.

"Spiral modes", as that term is used herein, 15 refers to eigenmodes of radiation patterns for structures such as spiral and sinuous antennas. Indeed, each of the spiral, sinuous, log-periodic tooth, and rectangular spiral antenna elements disclosed herein as examples of the present invention exhibit spiral modes. A 20 "spiral-mode antenna element" is an antenna element that exhibits radiation modes similar to those of spiral antenna elements. A mode can be thought of as a characteristic manner of radiation. For example, Fig. 14 shows some typical spiral modes for a prior spiral 25 antenna, and particularly shows modes $n=1$, $n=2$, $n=3$, and $n=5$. Here, the axis perpendicular to the plane of the antenna points to zero degrees in the figure. The "spiral mode" antenna elements disclosed herein as part of a microstrip antenna radiate in patterns roughly similar to, 30 though not necessarily identical with, the patterns of Fig. 14. As shown in Fig. 14, the spiral mode radiation pattern for $n=1$ is apple-shaped and is preferred for many communication applications. In such applications, the donut-shaped higher order modes should be avoided to the 35 extent possible (as by using only two spiral arms) or suppressed in some manner.

-28-

"Multioctave", as that term is used herein, refers to a bandwidth of greater than 100%. "Frequency-independent", as that term is used herein in connection with antenna elements and geometry patterns formed therein, refers to a geometry characterized by angles or a combination of angles and a logarithmically periodic dimension (excepting truncated portions), as described in R.H. Rumsey in Frequency Independent Antennas, supra.

10 To obtain near maximum gain at a given frequency, the stand-off distance d should be between 0.015 and 0.30 of a wavelength of the waveform in the substrate (the dielectric spacer). With regard to the relative dielectric constant of the substrate, applicants have
15 found that materials with ϵ of between 1 and 4.37 work well, and that a range of 1.1 to 2.5 appears practical. A higher dielectric constant (5 to 20) leads to gradual narrowing of bandwidth and deterioration of performance which nevertheless may still be acceptable in many
20 applications. This and other design configurations, which operate satisfactorily for a specific frequency range, can be changed so that the antenna will work satisfactorily in another frequency range of operation. In such cases the dimensions and dielectric constant of the design are
25 changed by the well known "frequency scaling" technique in antenna theory.

4. The Spiral-Mode Circular Array

30 Referring now to Figs. 15 and 16, the closed array of the present invention is considered. As shown in these figures, an antenna 60 is mounted above a ground plane GP and includes a somewhat stiff, comformable backing 61. The backing 61 is a unitary structure,
35 preferably made of printed circuit board material. The

-29-

backing 61 is spaced above the ground plane GP by a dielectric spacer 62 in accordance with the principles set forth in the above numbered sections 1-3. A closed array or series of patch elements 63, 64, 65, 66, 67, 68, 69, 5 and 70, is formed atop the upper surface of the backing 61 by conventional techniques, such as by photoetching. Preferably, the array is circular, although what is essential is that the array be "closed", i.e., is generally of the form of a loop. While eight elements are 10 depicted in Fig. 15, a greater or lesser number of elements can be used. In Fig. 16, the vertical dimensions of the patch elements and of the backing are exaggerated somewhat to make these elements more visually discernible in the figure. The patch elements 63-70 are connected to 15 unshown electrical means for driving the individual elements, the driving means being adapted to drive the individual patch elements in a phased manner. The electrical circuitry used to phase signals delivered to the individual patch elements is well-known. In general, 20 the signal is split up into several signals and delayed or phase-shifted an appropriate amount, by a network of "hybrids" sometimes called a "processor", before being delivered to the patch elements. Of course, the individual patch elements 63-70 are electrically coupled 25 with the driving means in a manner similar to that shown in Fig. 2B, i.e., through the use of cabling or in another suitable manner.

The structure just described is extremely compact and is well-suited for being used on the surface of an 30 object, for example, on the surface of an airplane. The antenna 60 with the array of individual antenna elements 63-70 has a small overall dimension for a bandwidth of 30 to 300%, depending on the diameter of the array. The applicants have found that this arrangement allows the 35 antenna to be made substantially smaller than prior antennas at a sacrifice of some bandwidth and some gain,

- 30 -

and that the smaller the diameter of the circular array, the smaller the bandwidth. As compared with the spiral arm antennas disclosed in the above-referenced co-pending U.S. patent application, the present invention allows the diameter of the antenna to be reduced by up to 2/3 or so. When compared with other prior antennas, such as the antenna arrays disclosed in the Munson IEEE paper, the reduction in physical size is even more dramatic. This reduction in size is achieved at a sacrifice of bandwidth and perhaps even gain. However, for many applications, 30 to 50% bandwidth is sufficient; yet such a bandwidth cannot be obtained by conventional microstrip patch antennas. Thus, the spiral-mode circular array fills the need for a conformable, low-profile, antenna with a moderately wide bandwidth in the 30% to 300% range while the array diameter can be only 1/2 to 1/3 the spiral diameter.

The basic concept of a spiral-mode circular phased array is shown in Figure 15. The circular array is on a x-y plane which is treated as a horizontal plane parallel to the earth. The array elements are on a circle of radius a, and can be represented as either magnetic or electric current elements, denoted by J_m^n for the nth element of mode m.

The current J_m^n must have a polarization, amplitude, and phase as follows:

$$J_n^m = \hat{\rho} J_m e^{-j \frac{mn}{N} \phi} \quad n = 1, 2, 3 \dots N; \text{ for mode } m \quad (41)$$

where $\hat{\rho} = \cos \phi \hat{x} + \sin \phi \hat{y}$, $\hat{\rho}$ being a unit radial vector in the cylindrical coordinates. The pattern of this array remains the same if the polarizations of the current sources are changed to $\hat{\phi}$, that is, if

$$J_n^m = \hat{\phi} J_m e^{-j \frac{mn}{N} \phi} \quad n = 1, 2, 3 \dots N; \text{ for mode } m \quad (42)$$

SUBSTITUTE SHEET

- 31 -

When $m=1$, the radiation pattern of this circular array is apple-shaped as shown in Fig. 17A. When $m=2$ or higher, the radiation pattern is that of the doughnut shape shown in Fig. 17B. Thus, this circular array can provide the spatial coverage shown in Figures 17A and 17B. Now if two or more of these modes are combined, the resultant pattern has a narrower steerable beam, as well as one or more steerable nulls for noise or interference reduction.

10 This multi-mode circular array alternatively can be realized, as in the co-pending patent application, by a multimode planar spiral, for which the radiation current band theory is well known. However, the planar spiral requires a much larger aperture, because its radiation
15 occurs on a circle whose circumference is $m\lambda$ in length. For example the $m=1$ mode of a planar spiral radiates on a circumference of one wavelength (1λ), and the $m=2$ mode radiates on a 2λ circumference. Thus, for higher mode numbers, the planar spiral can be unattractively large.

20 In the multi-mode circular array disclosed herein, radiation occurs on the circle of radius a , where the array elements are located. Theoretically, the array radius a can be arbitrarily small. In reality, the tolerance of the array becomes increasingly stringent as
25 the array diameter is reduced to below about 0.3λ for mode 1 and 0.6λ for mode 2. By a simple array factor analysis, one can show that the axial ratio deteriorates at angles away from the antenna axis (z axis) and that the axial ratio increases as the array size (in wavelength)
30 decreases.

As has been pointed out, a major advantage of this spiral-mode circular array is its ability to radiate, especially for higher-order modes ($m > 2$), on a smaller aperture. For example, to radiate an $m=3$ mode, a planar
35 spiral needs to have a circumference of more than 3λ (a diameter of 0.955λ). For the mode-3 circular array, a λ

-32-

circumference (0.318λ in diameter) is acceptable. However, it has been observed that the tolerance requirements on the feed network becomes more and more stringent for smaller apertures.

5

5. Bandwidth Coverage of the Array Arrangement

Two techniques can be employed to expand the bandwidth of the array to 10:1 or more:

10

(a) Concentric circular arrays, as shown in Fig. 18, wherein four concentric circular arrays are shown, only two of which are needed for the breadboard model; and

(b) Element broadbanding.

15

The individual microstrip patch antenna is known for its narrow bandwidth, typically 10% and often 3 to 6%. By increasing its effective cavity, the bandwidth of a microstrip antenna can be increased. For example, with a substrate of 0.318 cm, and a related permittivity of 20 2.32, the bandwidth at 10 GHz is about 20%. In addition, by having the patch elements closely spaced with each other, the impedance bandwidth of the array can be made much larger than that of the individual array elements. By employing a dissipative loading similar to that of the 25 planar spiral or the circular array of loaded loops, a bandwidth of 3:1 can be reached with a loss no more than that of the cavity-loaded spiral antenna.

Although dissipative loss, perhaps on the order of 2 dB, is an undesirable feature it is more than 30 compensated for by a higher gain from the antenna patterns and the anti-jamming capability against noise. As a result, the signal-to-noise ratio of the antenna disclosed herein should be equivalent to the single-element low-gain antennas with broad apple or doughnut beams.

-33-

To broaden the tunable frequency bandwidth, one can switch the effective length of a microstrip antenna with PIN diodes as shown in Fig. 19. This technique of switching the effective length of a microstrip structure has been experimentally investigated and analyzed in some instances. The high temperature limits for this diode-switching device are yet to be determined.

6. Using Magnetic Substrate To Reduce Antenna Size

10

In a manner similar to that in the above-noted co-pending patent application, we have determined that if the substrate between the antenna element and the ground plane is a magnetic material with equal relative permittivity and permeability, the spiral modes can radiate effectively. As has been shown in the co-pending patent application, with a substrate having high relative permittivity (say, greater than 5) the antenna pattern begins to deteriorate. However, when its relative permittivity and permeability are equal, the substrate is compatible with the spiral modes and therefore good radiation patterns for each mode can be generated without other unwanted modes that can disrupt the pattern. This is depicted in Fig. 20 wherein antenna element(s) is positioned atop a magnetic substrate having substantially equal relative permittivity and permeability. A loading material 74 is placed about the periphery.

Now, if the relative permittivity and permeability of the magnetic substrate are chosen to be a higher number, say, 10, then the wavelength in the substrate will be only 1/10 (10%) of that in free space. This allows the antenna size to be reduced to 1/10 (one-tenth) of its size when using a honey-comb substrate (relative permittivity and permeability being close to unity).

-34-

Fig. 20 shows that a magnetic material is used as the substrate 73 for the spiral-mode microstrip antenna. By carrying out an analysis similar to that in Section 2, we have demonstrated that if the relative permittivity ϵ_r equals the relative permeability μ_r , the structure shown in Fig. 20 is compatible with the spiral modes. In other words, when $\epsilon_r \cong \mu_r$, the substrate is not expected to disrupt the spiral modes as the ordinary dielectric substrates do. (For an ordinary dielectric material, $\mu_r = 1$, while ϵ_r is a number larger than 1; thus $\epsilon_r \neq \mu_r$.)

Now if we use as substrate a material with $\epsilon_r \cong \mu_r$ ($\epsilon_r = \mu_r$ being highly unlikely), we can reduce the physical size of the antenna by the factor $\sqrt{\epsilon_r \mu_r}$ or approximately ϵ_r (since $\epsilon_r \cong \mu_r$). For example, if we use a material with $\epsilon_r \cong \mu_r \cong 10$, we can reduce the size of the antenna (both the thickness of the substrate and the diameter of the frequency-independent element) by a factor of 10. That is, we can reduce its size to 1/10 of its size when using a substrate with its permittivity near that of free space ($\epsilon_r \cong 1$).

At present, no ready-made material with equal relative permittivity and permeability appears to be commercially available. However, custom materials can be constructed by mixing grains of two materials to achieve equal, or nearly equal, relative permittivity and permeability. The size of the grains must be small in comparison with wavelength (in the material), and must be uniformly distributed to achieve homogeneity on a macroscopic scale. For example, two different types of cubes, one more dielectric and the other more magnetic, and with their linear dimensions being identically equal to 0.1 wavelength (in the material), can be alternately spaced to approximate a homogeneous material of equal relative permittivity and permeability.

-35-

Another method of making custom magnetic material for substrate of equal ϵ_r and μ_r is to place electrically thin dielectric and magnetic sheets parallel to the ground plane alternately in a stack. (Sheets placed perpendicular to the ground plane should have similar effects.) The stack then appears macroscopically to be homogeneous with equal ϵ_r and μ_r . For example, sheets with $\epsilon_r=3-j0.1$ and $\mu_r=1$ can be alternately stacked with sheets with $\epsilon_r=1$ and $\mu_r=3-j0.1$ to achieve this effect (the imaginary part $j0.1$ is related to the dissipation of the material and is chosen to be small, $j0.1$ is a practical choice; other small numbers are acceptable.)

7. Varying Effective Substrate Thickness In a mode-2

15 Antenna

The physical size of a mode-2 antenna, which generally has a larger and more complex feed network, can be reduced by varying the effective thickness of the substrate. A simple coax feed at the center excites a transmission-line wave propagating away from the center along the spiral structure, thereby forming spiral modes. In the region covered by a circle with a circumference slightly over one wavelength, the substrate is sufficiently thin so that $m=1$ radiation is minimal. Outside this region the effective thickness of the substrate is increased so that radiation of mode-2 is effective.

The advantage of this mode-2 antenna is not only a reduction in physical size, including that of its feed, but also a reduction in cost, improvement in reliability and greater structural simplicity.

As shown in Fig. 12, the gain of the spiral-mode microstrip antenna drops sharply when the spacing between the antenna element and the ground plane is decreased to

-36-

below, say, 0.02 wavelength. This phenomenon is taken advantage of in the following mode-2 antenna.

Figs. 21A and 21B show two versions of a simple illustrative design in which the center conductor of a coaxial line 76 is fed through a ground plane GP to the center of a spiral structure 77. The two spiral arms within the mode-1 radiation region (where the circumference is less than 1.1 wavelength) join at the center with the center conductor of the coaxial line. Also, the fine Archimedean spiral arms as shown in the mode-2 region (outside the circumference of 1.1 wavelength) are broadened in the mode-1 region. The specific pattern of the broadening of the arms is not critical as long as it transforms the impedance (usually 50 ohms of the coax cable at the center into the impedance of the spiral microstrip structure.

Radiation in the mode-1 region is minimized by choosing d_1 , the spacing between the spiral element 77 and the ground plane, to be electrically small (less than say, 0.02 wavelength).

However, as the wave moves outwardly from the center of the spiral structure and enters the mode-2 region (where the circumference is greater than about 1.1 wavelength), effective radiation takes place because the spacing d_2 between the spiral element 77 and the ground plane GP is now greater than about 0.05 wavelength. The fact that the radiation occurs in the mode-2 region means that the radiation pattern should be that of mode-2.

In Fig. 21A, the spacing between the spiral element 77 and the ground plane abruptly changes from d_1 in the mode-1 region to d_2 in the mode-2 region. In this version, radiation in mode-2 is effective. However, the abrupt increase in spacing for substrate thickness from d_1 to d_2 causes undesired reflections.

-37-

As shown in Fig. 21B, the reflection between mode-1 and mode-2 regions is reduced by employing a tapered section to effect a gradual increase in substrate thickness from d_1 to d_2 . However, the mode-2 radiation is not as effective at frequencies at which mode-2 regions begins in the tapered transition region, since the smaller substrate thickness in the transition region suppresses radiation.

The taper between d_1 and d_2 shown in Fig. 21B can be linear or of some other smooth curve, the selection of which is a tradeoff among several considerations, including technical performance as well as production cost and ruggedness.

It is well known that the effect of the ground plane on the mode-2 radiation is generally negative. Therefore it is desirable, whenever possible, to reduce the size of the ground plane and/or to make it convexly curved so that, for example, the ground plane is a large conducting sphere and the spiral is positioned outside it.

The patch elements can comprise lossy components for impedance matching.

While the invention has been disclosed in preferred forms by way of examples, it will be obvious to one skilled in the art that many modifications, additions, and deletions may be made therein without departing from the spirit and scope of the invention as set forth in the following claims.

-38-

CLAIMS

1. A compact microstrip antenna comprising:
an array of non-resonant antenna elements
arranged in a generally closed loop pattern and adapted to
5 be driven out of phase from one another for generating at
least one spiral mode;
a ground surface; and
a substrate positioned to one side of said
antenna elements for spacing said antenna elements a
10 selected distance from said ground surface, said selected
distance being small in relation to an operating
wavelength, generally between 1/60 and 1/2 wavelengths,
and said substrate having a relative dielectric constant
of between about 1.0 and about 2.0.
- 15 2. A microstrip antenna as claimed in Claim 1
wherein each of said antenna elements comprises a metal
foil and the mounting surface is conducting.
3. A microstrip antenna as claimed in Claim 2
wherein said antenna elements comprises patches which each
20 are closely spaced with adjacent ones of other patches.
4. A microstrip antenna as claimed in Claim 1
wherein each of said antenna elements comprises a
dissipative load.
5. A microstrip antenna as claimed in Claim 1
25 wherein said closed pattern of the array is generally
circular.
6. A microstrip antenna as claimed in Claim 1
wherein said array of antenna elements comprises at least
four elements.
- 30 7. A microstrip antenna as claimed in Claim 1
wherein said array of antenna elements comprises at least
six elements.
8. A microstrip antenna as claimed in Claim 1
wherein said array of antenna elements comprises at least
35 eight elements.

-39-

9. A microstrip antenna as claimed in Claim 1 further comprising at least one more array of non-resonant antenna elements arranged concentrically with said closed loop pattern.

5 10. A compact microstrip antenna for mounting to one side of a surface of a structure, comprising:
one or more antenna elements; and
a magnetic substrate adapted for positioning the antenna elements a selected distance from the surface,
10 said magnetic substrate having a relative permittivity and a relative permeability, said relative permittivity being roughly equal to said relative permeability.

11. A microstrip antenna as claimed in Claim 10 further comprising a loading material positioned about a
15 peripheral portion of said one or more antenna elements and adjacent the surface of the structure.

12. A microstrip antenna as claimed in Claim 10 wherein said substrate comprises alternating layers of dielectric material and magnetic material so that their
20 resultant relative permittivity and relative permeability are approximately equal.

13. A microstrip antenna as claimed in Claim 10 wherein said antenna is adapted to operate at a selected wavelength and wherein said substrate is comprised of
25 first and second granular materials, each of said first and second granular materials having a small grain size, and wherein the combined relative permittivity and relative permeability are approximately equal.

14. A compact spiral-mode microstrip antenna for
30 mounting to one side of a ground plane comprising:
one or more antenna elements; and
a substrate positioned to one side of said antenna elements for spacing said antenna elements a selected first distance above the ground plane in a first
35 radiation zone and for positioning said antenna elements a second selected distance above the ground plane in a

-40-

second radiation zone, said first selected distance and said second selected distance being different from one another, said first and second selected distances being chosen for suppressing radiation in one of said first and 5 second radiation zones and for fostering radiation in the other of said first and second radiation zones.

15. A microstrip antenna as claimed in Claim 14 wherein said first radiation zone is positioned concentrically within said second radiation zone.

10 16. A microstrip antenna as claimed in Claim 14 wherein a profile of the spacing between said one or more antenna elements and the ground plane in a transition region between said first and second radiation zones is generally smoothly tapered.

15 17. A microstrip antenna as claimed in Claim 14 wherein a profile of the spacing between said one or more antenna elements and the ground plane in a transition region between said first and second radiation zones is generally abrupt.

20 18. A multioctave microstrip antenna system comprising:

a spiral-mode antenna element including at least two metal foil arms formed in a geometric pattern and adapted to generate at least one spiral mode when 25 excited;

a conducting ground surface positioned to one side of said antenna element;

a substrate positioned to one side of said antenna element for spacing said antenna element a 30 selected distance from said ground surface, said selected distance being between about $1/60$ and $1/2$ wavelengths throughout a multioctave operating frequency range, said substrate having a relative dielectric constant of between 1.0 and 2.0; and

35 a feed network with a near-perfect impedance match with said spiral mode antenna element.

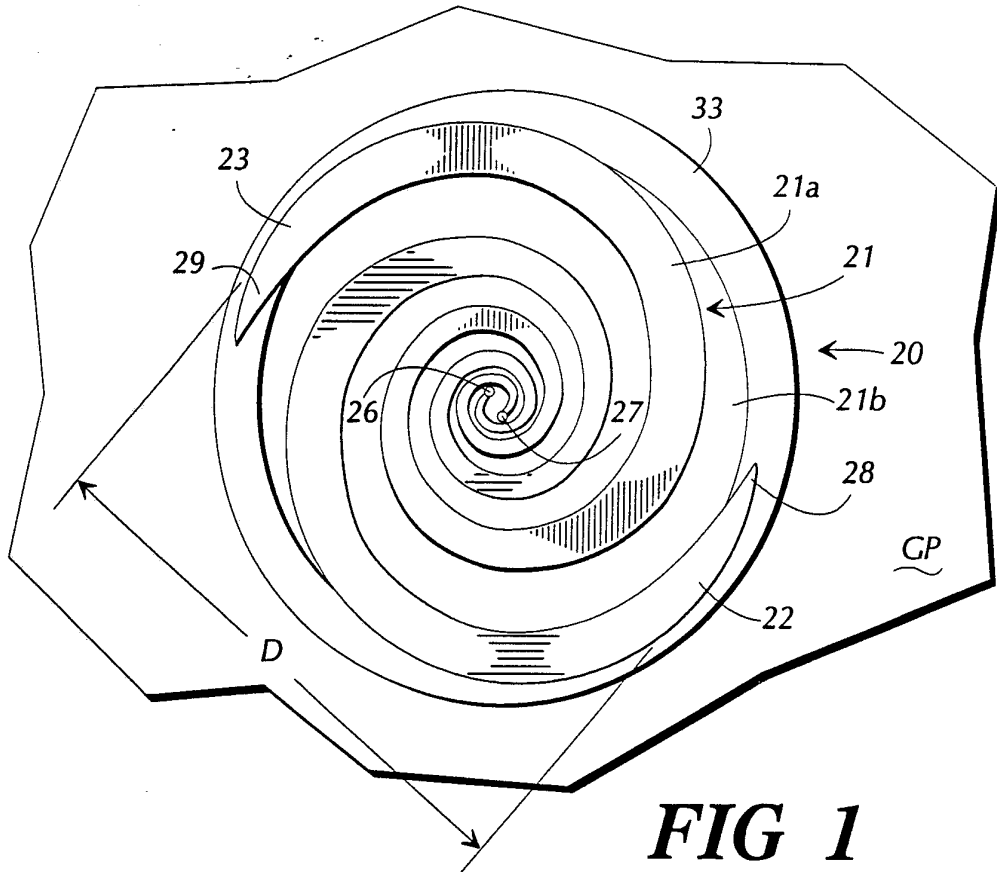


FIG 1

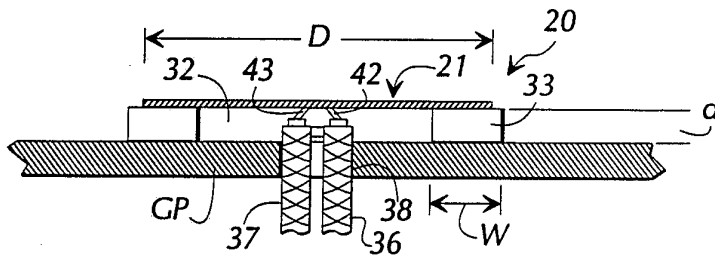


FIG 2A

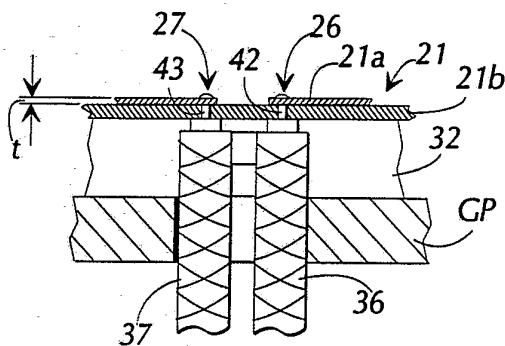


FIG 2B

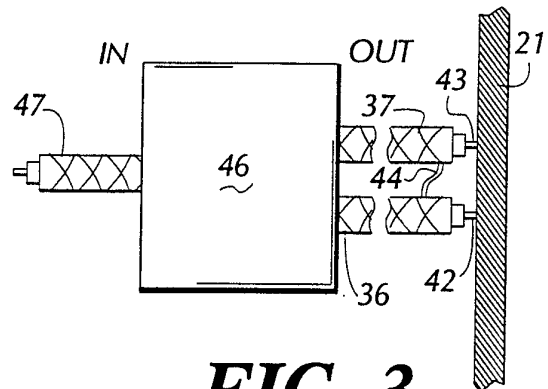


FIG 3

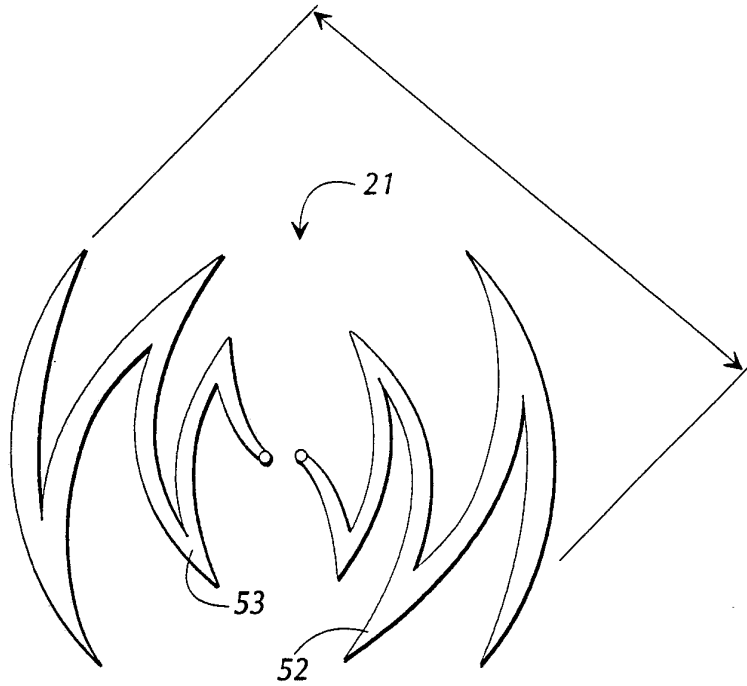


FIG 4A



FIG 4B

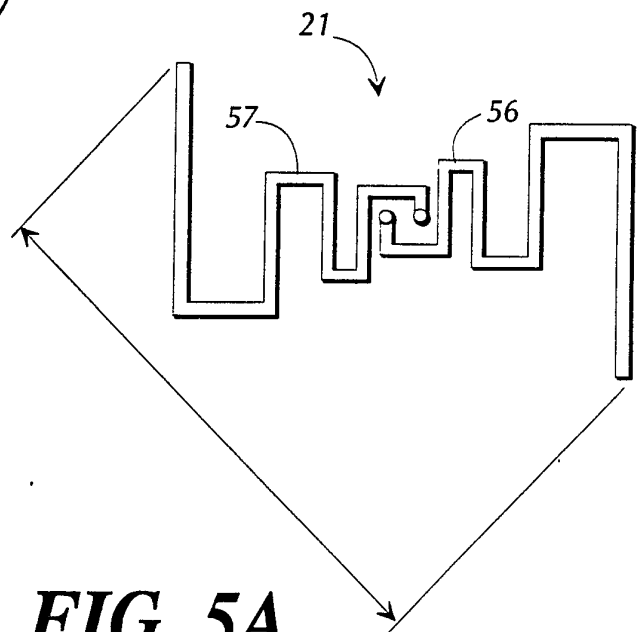


FIG 5A
SUBSTITUTE SHEET

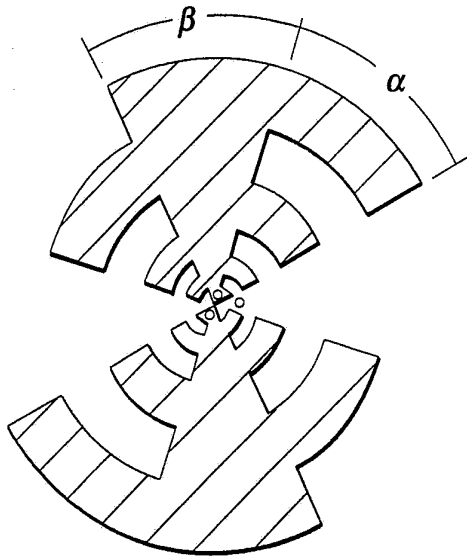


FIG 5B

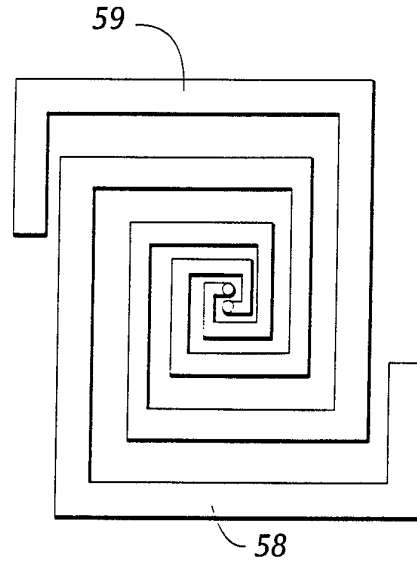


FIG 6

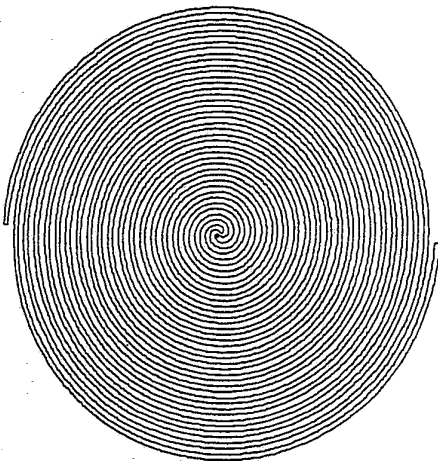


FIG 7

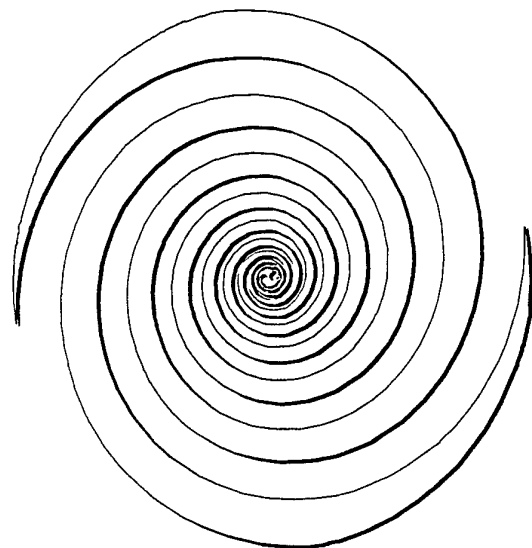


FIG 8

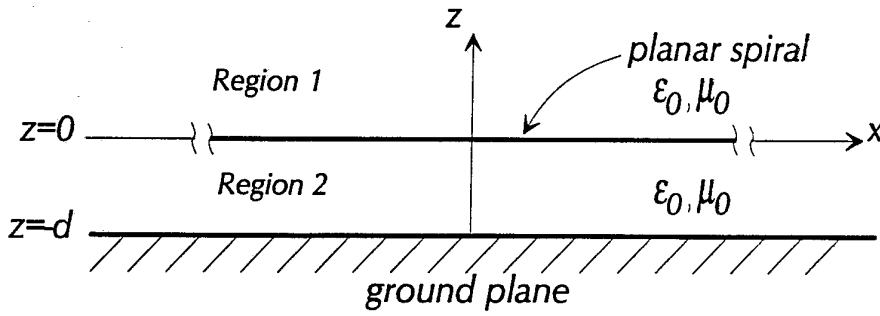


FIG 9A

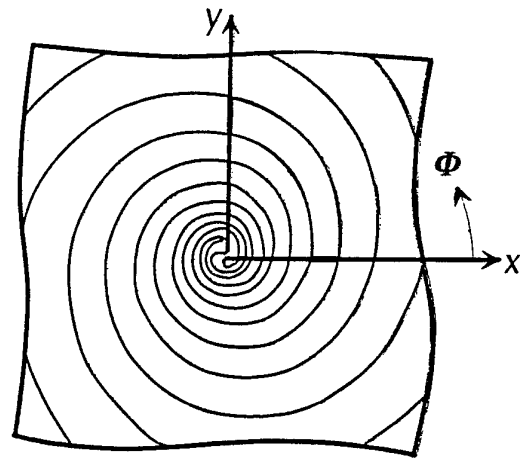


FIG 9B

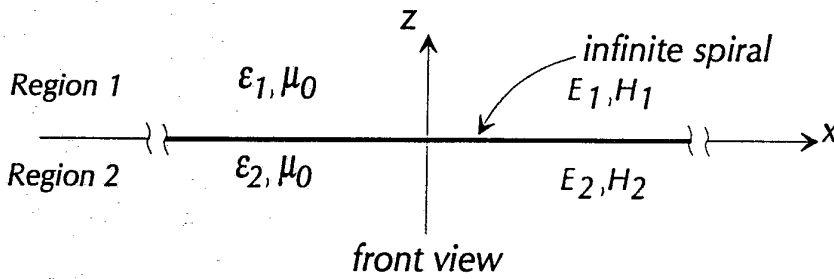


FIG 10A

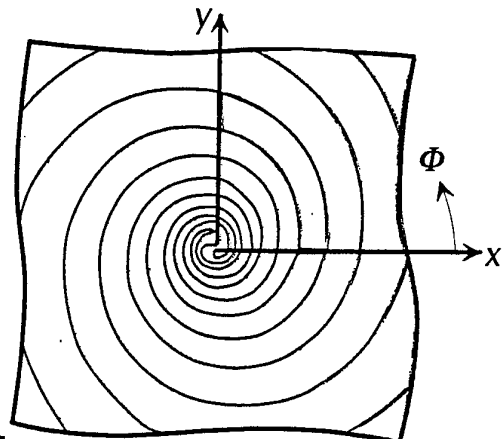


FIG 10B

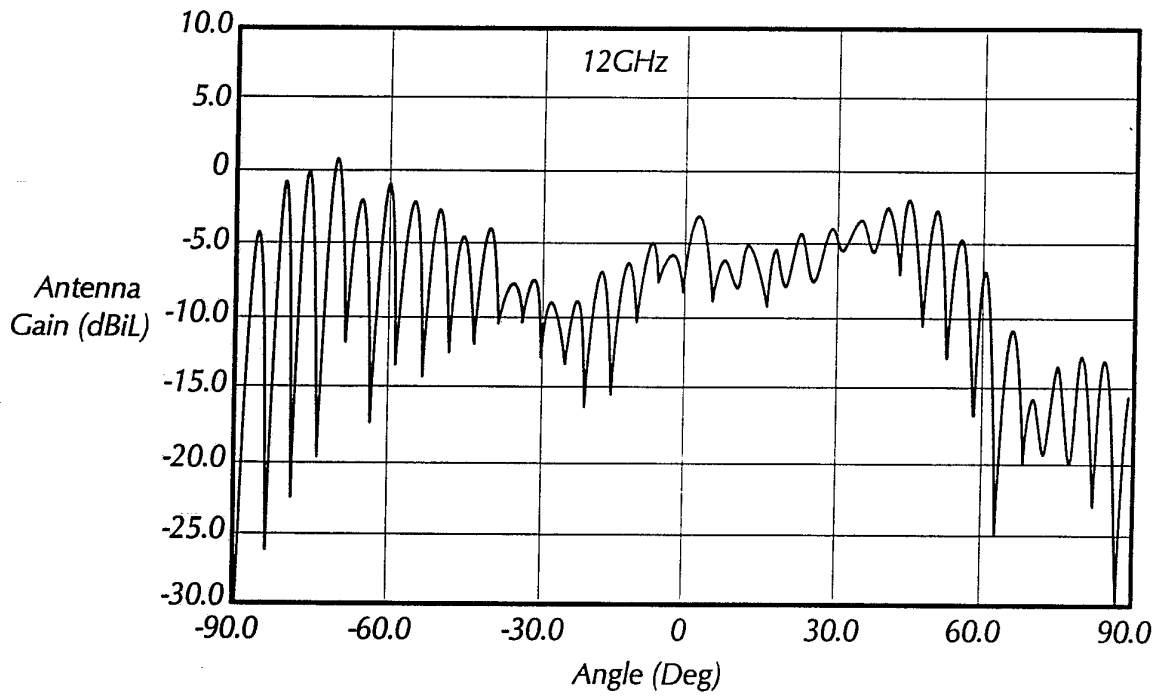


FIG 11A

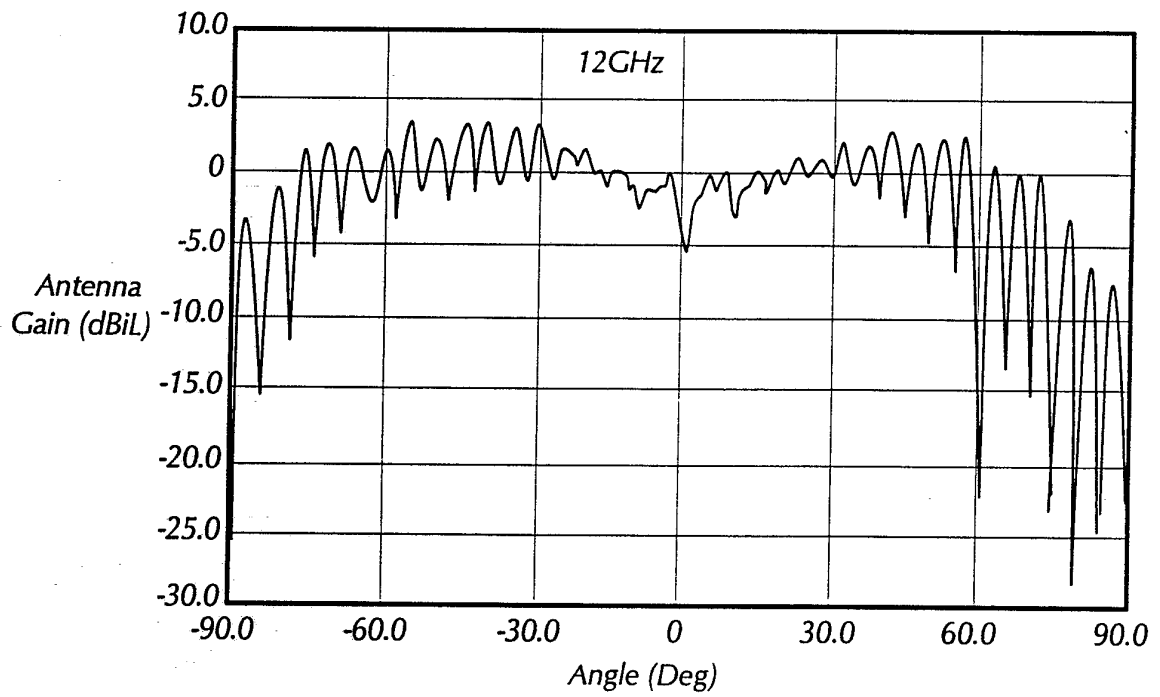


FIG 11B

SUBSTITUTE SHEET

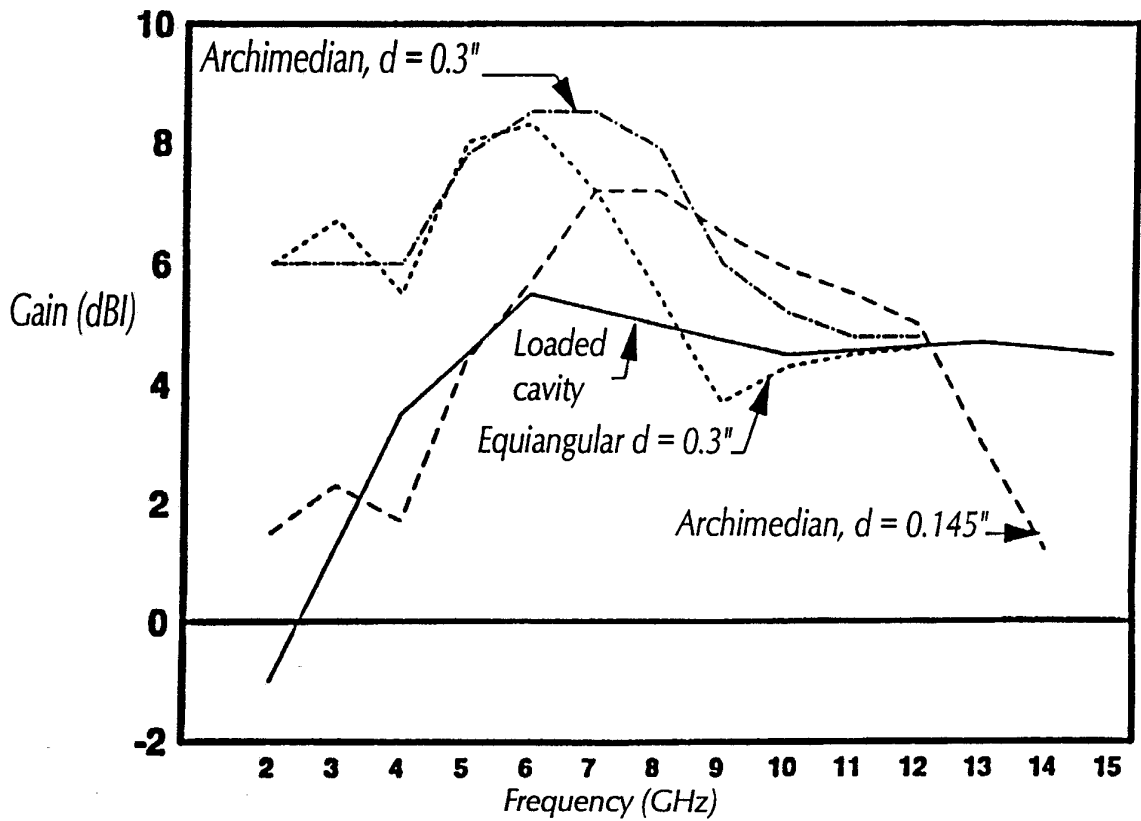


FIG 12

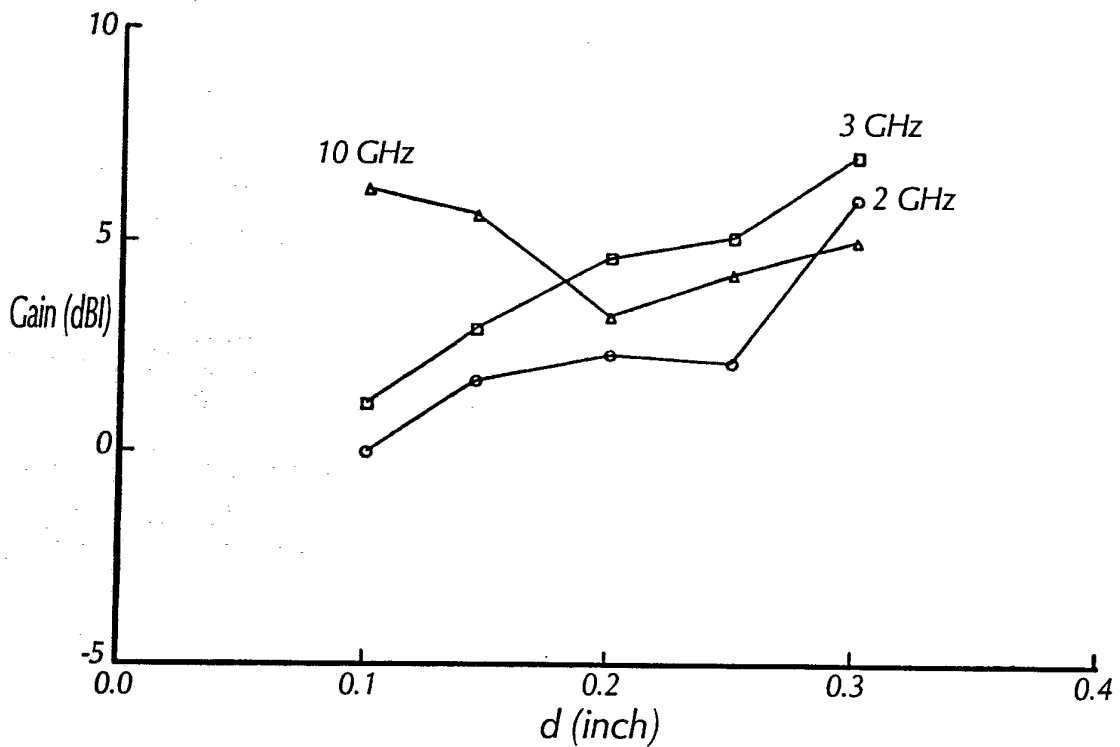


FIG 13

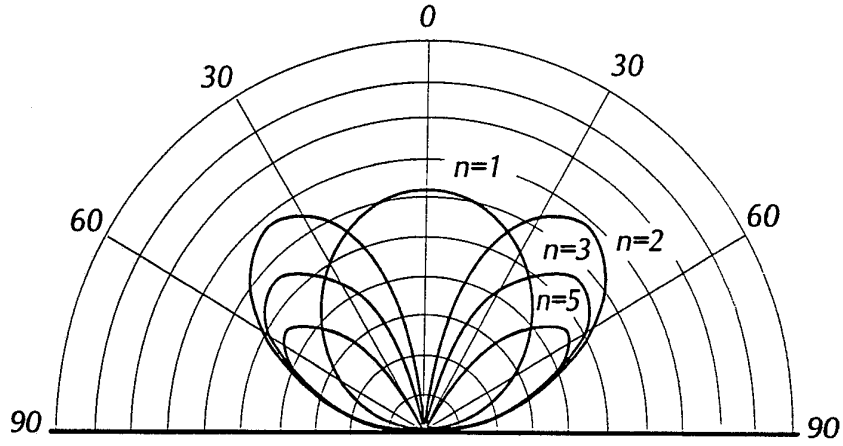


FIG 14

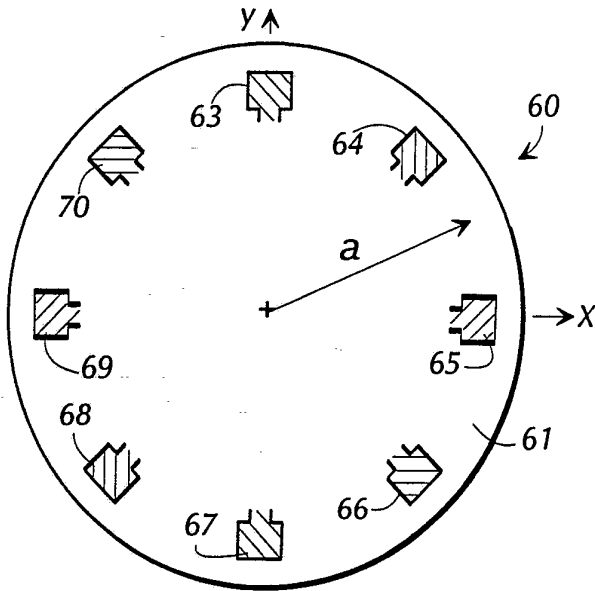


FIG 15

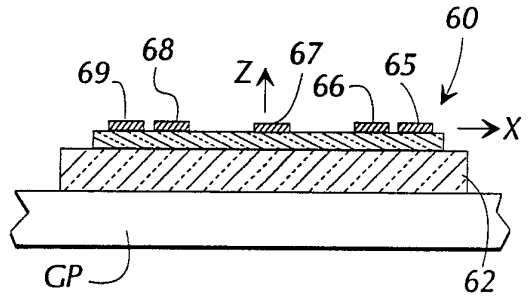


FIG 16

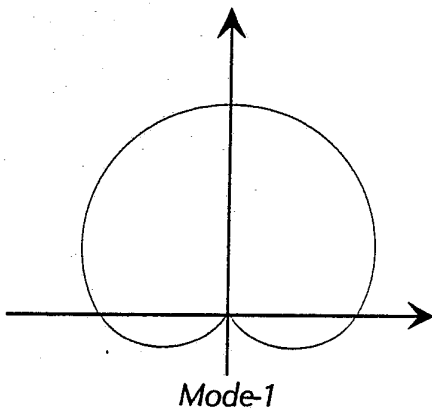


FIG 17A

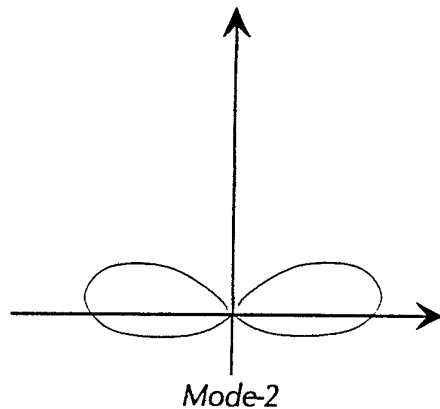


FIG 17B

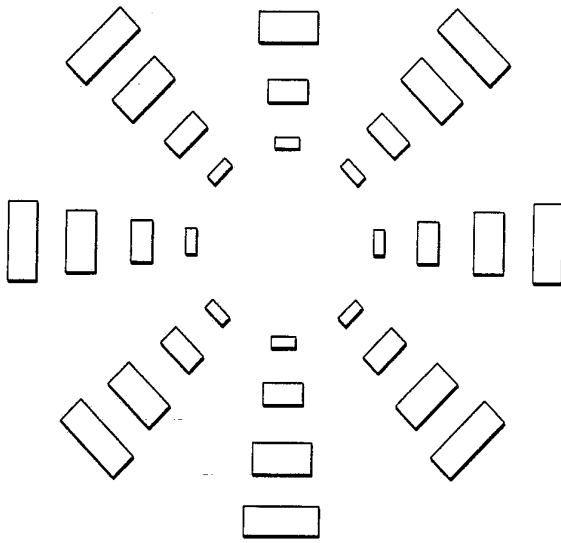


FIG 18

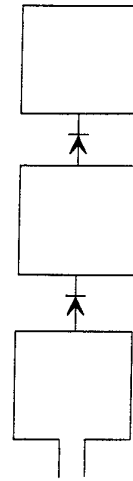


FIG 19

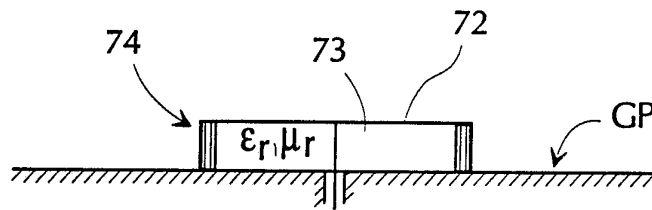


FIG 20

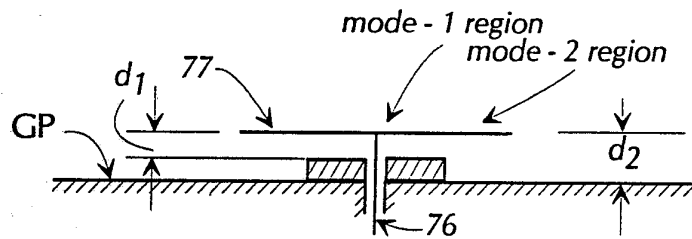


FIG 21A

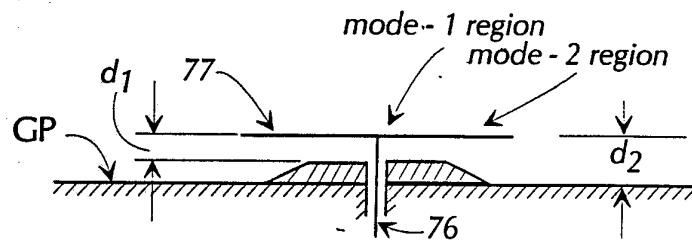


FIG 21B

INTERNATIONAL SEARCH REPORT

PCT/US92/09439

A. CLASSIFICATION OF SUBJECT MATTER
 IPC(5) : H01Q 11/02, 11/08, 1/36, 1/38, 25/00; H01Q 1/00, 13/08, 21/00, 21/22, 25/04
 US CL : 343/700MS, 787, 895
 According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED
 Minimum documentation searched (classification system followed by classification symbols)
 U.S. : 343/732, 834, 835, 846

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
 Please See Extra Sheet.

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US, A, 4,962,383 (TRESSELT) 09 October 1990, See figures 1, 8 & 9, text at column 3, lines 56-65, column 6, lines 7-36.	1-9
X	JP, A, 02-0246504 (ASANO) 02 October 1990, See figures 1, 5(a) & 5(b), PURPOSE and CONSTITUTION.	1-3, 5, 6
X	US, A, 4,651,159 (NESS) 17 March 1987, See figure 3 and the ABSTRACT.	10, 12
A	SU, A, 1,157,600 (KOROTKOV) 23 May 1985, See figures 1 & 2, Abstract & USE/ADVANTAGE.	10-13
X	EP, A, 0394960 (NOMOTO) 31 October 1990, See figures 1 to 4 and ABSTRACT on cover.	14-17

Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents:	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
A document defining the general state of the art which is not considered to be part of particular relevance	*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
E earlier document published on or after the international filing date	*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*&* document member of the same patent family
O document referring to an oral disclosure, use, exhibition or other means	
P document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search 28 JANUARY 1993	Date of mailing of the international search report 17 FEB 1993
--	--

Name and mailing address of the ISA/US Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231 Facsimile No. NOT APPLICABLE	Authorized officer <i>My Meas</i> PETER T. BROWN Telephone No. (703) 308-4083
---	--

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US92/09439

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	IEEE Transaction on Antennas & Propagation Volume 39, No. 3, March 1991, J.J.H. Wang et. al., Design of Multioctave Spiral-Mode Microstrip Antennas, pp. 332-335, See figure 2 and the paragraph bridging columns 1 & 2 on both pages 333 & 334.	18
Y	IEEE Transactions on Antennas & Propagation Volume 29, No. 1, January 1981, K.R. Carver et al., Microstrip Antenna Technology, pp. 2-23, See page 3, lower half of right-hand column and TABLE I on page 4.	18

B. FIELDS SEARCHED

Electronic data bases consulted (Name of data base and where practicable terms used):

APS (USPTO)-permittivity, (dielectric constant) epsilon, permeability, MV, Substrate

ORBIT DATABASE, FILE INSPEC-microstrip, spiral, (TRIPP, V.K./AV), (WANG, J.J.H./AV)

BOX II. OBSERVATIONS WHERE UNITY OF INVENTION WAS LACKING

This ISA found multiple inventions as follows:

Group I, claims 1-9, drawn to a plurality of non-resonant antenna elements, classified in class 343, subclass 700ms.

Group II, claims 10-13, drawn to a magnetic substrate, classified in class 343, subclass 787.

Group III, claims 14-17, drawn to spacing arrangements for a spiral mode antenna, classified in class 343, subclass 895.

Group IV, claim 18, drawn to a spiral antenna, classified in class 343, subclass 895.