



(51) International Patent Classification:

C08F 293/00 (2006.01) *C09J 7/38* (2018.01)
C09J 153/00 (2006.01)

MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

(21) International Application Number:

PCT/US2017/058284

Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

(22) International Filing Date:

25 October 2017 (25.10.2017)

(25) Filing Language:

English

(26) Publication Language:

English

Published:

- *with international search report (Art. 21(3))*

(30) Priority Data:

62/412,326 25 October 2016 (25.10.2016) US

(71) Applicant: **AVERY DENNISON CORPORATION**
[US/US]; 207 Goode Avenue, Glendale, CA 91203 (US).

(72) Inventors: **BARTHOLOMEW, Eric, L.**; 28 Sooberry Drive, Mill Hall, PA 17751 (US). **BOTTORF, William, L.**; 92 East Haven Pines Road, Mill Hall, PA 17751 (US). **HEIMBACH, Kyle, R.**; 51 Kaiser Run Road, Millmont, OH 17845 (US). **MILLER, Brandon, S.**; 100 Bridge Street, Lock Haven, PA 17745 (US). **WATERMAN, Michael, T.**; 10211 Mulberry Road, Chardon, OH 44024 (US). **ZAJACZKOWSKI, Michael**; 200 Millgate Road, Bellfonte, PA 16823 (US).

(74) Agent: **STROBEL, Jason, R.** et al.; Avery Dennison Corporation, 8080 Norton Parkway, 22D, Mentor, OH 44060 (US).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,

(54) Title: BLOCK POLYMERS WITH PHOTOINITIATOR GROUPS IN BACKBONE AND THEIR USE IN ADHESIVE COMPOSITIONS

(57) Abstract: Acrylic copolymers that include the controlled placement of particular functional groups within the polymer structure are provided. The copolymers comprise a first reactive segment of including a functional group selected from the group consisting of a UV active functional group, a reactive functional group, a non-reactive functional group, and combinations thereof and a second segment including a functional group selected from the group consisting of a reactive functional group, a non-reactive functional group, and combinations thereof. The acrylic copolymers are manufactured via a controlled radical polymerization process. The copolymers are useful in the manufacture of adhesives and elastomers.



**BLOCK POLYMERS WITH PHOTOINITIATOR GROUPS IN BACKBONE AND
THEIR USE IN ADHESIVE COMPOSITIONS**

CROSS-REFERENCE TO RELATED APPLICATION

[0001] The present application claims the benefit of U.S. Provisional Patent Application No. 62/412,326 filed October 25, 2016, which is incorporated herein by reference in its entirety.

BACKGROUND

[0002] The subject matter relates to acrylic polymers, and in particular, to acrylic copolymers that include controlled placement of reactive functional groups within the polymer structure. The copolymers are useful in the manufacture of adhesives and elastomers.

[0003] (Meth)acrylic (co)polymers have been studied and used industrially for more than 50 years. Due to a wide range of monomers, (meth)acrylic (co)polymers display a significant array of viscoelastic properties that lend themselves well to applications in adhesives and elastomers. When compared to other copolymers that are used for similar purposes as (meth)acrylics, several significant advantages of (meth)acrylics become apparent. For example, relative to natural rubber and styrene block copolymers (meth)acrylic copolymers have superior optical clarity, UV stability, and temperature and oxidative resistance. State of the art (meth)acrylic copolymers meet many performance characteristics by virtue of their high molecular weight and crosslinking reactions. Because of the wide array of copolymerizable monomers, (meth)acrylic polymers have tailorable polarity and the ability to undergo a variety of crosslinking reactions. Typically, high performance (meth)acrylic copolymers are processed with large amounts of organic solvents.

[0004] Increasingly, there are significant economic and regulatory pressures for producers of solvent acrylic polymers to reduce the use of organic solvents in their processes. In particular, it is common for solvent acrylic polymers in adhesive applications to be coated from solutions averaging only 30-40% polymer. The solvent has to be evaporated and then either collected or incinerated, all of which are energy intensive and costly operations. Additionally, removal of solvent from thick adhesive films may produce defects in the dry adhesive film.

[0005] Control of polymer architecture is often the subject of intensive research with the goal of improving performance for ever increasingly challenging applications. Architectures that acrylic polymers are known to possess include block copolymers, telechelic polymers, and random polymers of controlled molecular weight. Even though advances in controlling architecture have occurred with many benefits, each of these particular architectural types has disadvantages. For example, block copolymers have high melt viscosities which require high processing temperatures, making it difficult to control reactivity of functional groups. The production of telechelic polymers often involves multiple steps. Telechelics involve the placement of a reactive functional group exclusively on the end terminus of a polymer and not elsewhere in the polymer backbone. Functional groups placed at the end termini of polymers serve solely to increase the linear molecular weight in a manner in which free polymer chain ends are eliminated. As a result, telechelic polymers can yield high strength materials but do not provide the viscoelastic properties critical to adhesives and some elastomer applications. Random polymers of controlled molecular weight require high amounts of crosslinking to attain network formation.

[0006] In the past 15-20 years a variety of controlled radical polymerization techniques have been developed to afford good architectural control of (meth)acrylic monomers. These techniques typically are tolerant to a wide variety of monomers and functional groups as opposed to previous techniques like anionic or group transfer polymerization. A substantial amount of fundamental research has been performed to understand these types of polymerization and a thorough review has been edited by Matyjaszewski. Reversible addition fragmentation chain transfer (RAFT) polymerization is one such technique that has been shown to work exceedingly well with a wide variety of (meth)acrylic monomers yielding excellent control of molecular weight and polydispersity. The RAFT mechanism for controlled polymerization is well understood and reported extensively. While some examples of controlled architecture acrylic PSAs have been reported, very little work has been done to explore the influence of reactive functional group placement.

SUMMARY

[0007] The present subject matter addresses problems associated with previously known architected polymers by placement of crosslinkable monomers into segments of the polymer of controlled molecular weight and position. The overall molecular weight is low which yields desirable low viscosity, high solids solutions and melts. In conjunction with good processability, high performance elastomers and adhesives are obtained upon crosslinking. In particular, the crosslinkable monomers are

placed in specific segments of the polymer backbone so that the crosslink density is controlled for optimal performance. The compositions of the present subject matter contain no undesired heterogeneity prior to crosslinking. A further benefit is that in all embodiments of the subject matter, the polymer chain ends are preserved to yield desired visco-elastic and surface properties. To control the placement of crosslinkable monomers, it is preferred to employ a controlled free radical polymerization technique. In contrast with standard free radical processes it is now possible to control the placement of crosslinkable monomers.

[0008] The present subject matter provides an acrylic block copolymer composition comprising at least one of an (A-B) diblock copolymer, (A-B-A) triblock copolymer, an $-(A-B)_n-$ multiblock copolymer, and combinations thereof, whereby A is a first reactive segment and B is a second reactive segment. The present subject matter also provides a pressure sensitive adhesive derived from an acrylic block copolymer composition comprising at least one of an (A-B) diblock copolymer, (A-B-A) triblock copolymer, an $-(A-B)_n-$ multiblock copolymer, and combinations thereof, whereby A is a first reactive segment and B is a second reactive segment. The present subject matter further provides a method of preparing an acrylic block copolymer (and/or a method of preparing a pressure sensitive adhesive derived from an acrylic block copolymer composition) comprising at least one of an (A-B) diblock copolymer, (A-B-A) triblock copolymer, an $-(A-B)_n-$ multiblock copolymer, and combinations thereof, whereby A is a first reactive segment and B is a second reactive segment. The present subject matter also provides use of an acrylic block copolymer (and/or a pressure sensitive adhesive derived from an acrylic block copolymer) composition comprising at least one of an (A-B) diblock copolymer, (A-B-A) triblock copolymer, an $-(A-B)_n-$ multiblock copolymer, and combinations thereof, whereby A is a first reactive segment and B is a second reactive segment.

[0009] In one aspect, the present subject matter provides an acrylic polymer comprising at least one acrylic block copolymer including (i) a first reactive segment of controlled molecular weight and position that includes at least one monomer having a functional group selected from the group consisting of a UV active functional group, a reactive functional group, a non-reactive functional group, and combinations thereof, and (ii) a second segment of controlled molecular weight and position that includes at least one monomer having a functional group selected from the group consisting of a reactive functional group, a non-reactive functional group, and combinations thereof. The reactive functionalities in the first reactive segment and the second segment may be the same or different from one another. The non-reactive functionalities in the first reactive segment and the second segment may be the same or different from one another. In some embodiments, the first reactive segment includes

at least one monomer having a UV active functional group, at least one monomer having a reactive functional group, and at least one monomer having a non-reactive functional group. The second segment includes at least one monomer having a reactive functional group and at least one monomer having a non-reactive functional group. In other embodiments, the first reactive segment includes at least one monomer having a UV active functional group and at least one monomer having a non-reactive functional group. The second segment includes at least one monomer having a non-reactive functional group or at least one monomer having only a non-reactive functional group. The second segment is non-reactive with the UV active functional group or the reactive functional group. The at least one monomer having a non-reactive functional group is non-reactive with the UV active functional group and/or the reactive functional group. The first reactive segment and the second segment may be positioned adjacent to the polymer chain ends. The reactive functional groups and/or the non-reactive functional groups may be spaced apart along the length of the polymer chain. That is, the reactive functional groups and/or the non-reactive functional groups are spaced apart along the length of the first reactive segment and/or along the length of the second segment. The reactive functional groups and/or the non-reactive functional groups may be randomly spaced apart along the length of the polymer chain. That is, the reactive functional groups and/or the non-reactive functional groups may be randomly spaced apart along the length of the first reactive segment and/or along the length of the second segment. The at least one monomer having a UV active functional group is about 10% or less, or about 5% or less, or about 4% or less, or about 3% or less by weight of the total polymer weight. The first reactive segment comprises 40% or less, 30% or less, 20% or less, 10% or less, 5% or less, or 3% or less of the total polymer molecular weight. The first reactive segment(s) include about 40% to about 99%, or about 45% to about 99%, or about 50% to about 99%, or about 55% to about 99%, or about 60% to about 99%, or about 65% to about 99%, or about 70% to about 99%, or about 75% to about 99%, or about 80% to about 99%, or about 85% to about 99%, or about 90% to about 99%, or about 95% to about 99% by weight of one or more non-reactive monomers. The functional groups of the first reactive segment and the second segment are capable of undergoing crosslinking reactions. The first reactive segment and the second segment are molecularly miscible before cure as expressed by their properties in the bulk state that are indicative of a single phase behavior or a single phase polymer. That is, the acrylic polymer is a single phase polymer prior to crosslinking. The acrylic polymer is a homogeneous polymer prior to crosslinking. The acrylic polymer is a homogeneous polymer at room temperature.

[0010] In some embodiments, the acrylic polymer is a single phase polymer at room temperature.

[0011] In another embodiment, the acrylic polymer is a single phase liquid polymer prior to crosslinking.

[0012] In yet another embodiment, the acrylic polymer is a single phase liquid polymer at room temperature.

[0013] In still another embodiment, the acrylic polymer is a homogeneous polymer prior to crosslinking.

[0014] In yet another embodiment, the acrylic polymer is a homogeneous polymer at room temperature.

[0015] In certain embodiments, the acrylic polymer is a homogeneous liquid polymer prior to crosslinking.

[0016] In some embodiments, the acrylic polymer is a homogeneous liquid polymer at room temperature.

[0017] In another embodiment, the acrylic polymer is a liquid polymer prior to crosslinking.

[0018] In yet another embodiment, the acrylic polymer is a liquid polymer at room temperature.

[0019] In still another embodiment, the acrylic polymer exhibits no heterogeneity prior to crosslinking.

[0020] In yet another embodiment, the acrylic polymer exhibits no heterogeneity at room temperature.

[0021] In another aspect, the present subject matter provides an acrylic polymer comprising at least one acrylic block copolymer including two first reactive segments A of controlled molecular weight and position and one second segment B of controlled molecular weight and position, wherein the first reactive segments A is positioned on either side of a middle second segment B on the polymer chain to define an ABA structure. The first reactive segments A includes at least one monomer having a functional group selected from the group consisting of a UV active functional group, a reactive functional group, a non-reactive functional group, and combinations thereof. The second segment B includes at least one monomer having a functional group selected from the group consisting of a reactive functional group, a non-reactive functional group, and combinations thereof. The reactive functionalities in the first reactive segment A and the second segment B may be the same or different from one another. The non-reactive functionalities in the first reactive segment A and the second segment B may be the same or different from one another. In some embodiments, the first reactive segment includes at least one monomer having a UV active functional group, at least one monomer

having a reactive functional group, and at least one monomer having a non-reactive functional group. The second segment includes at least one monomer having a reactive functional group and at least one monomer having a non-reactive functional group. In other embodiments, the first reactive segment includes at least one monomer having a UV active functional group and at least one monomer having a non-reactive functional group. The second segment includes at least one monomer having a having a non-reactive functional group or at least one monomer having only a non-reactive functional group. The second segment is non-reactive with the UV active functional group or the reactive functional group. The at least one monomer having a non-reactive functional group is non-reactive with the UV active functional group and/or the reactive functional group. The first reactive segments are positioned adjacent to the polymer chain ends. The reactive functional groups and/or the non-reactive functional groups may be spaced apart along the length of the polymer chain. That is, the reactive functional groups and/or the non-reactive functional groups may be spaced apart along the length of the first reactive segment and/or along the length of the second segment. The reactive functional groups and/or the non-reactive functional groups may be randomly spaced apart along the length of the polymer chain. That is, the reactive functional groups and/or the non-reactive functional groups may be randomly spaced apart along the length of the first reactive segment and/or along the length of the second segment. The at least one monomer having a UV active functional group is about 10% or less, or about 5% or less, or about 4% or less, or about 3% or less by weight of the total polymer weight. The first reactive segment comprises 40% or less, 30% or less, 20% or less, 10% or less, 5% or less, or 3% or less of the total polymer molecular weight. The first reactive segment(s) include about 40% to about 99%, or about 45% to about 99%, or about 50% to about 99%, or about 55% to about 99%, or about 60% to about 99%, or about 65% to about 99%, or about 70% to about 99%, or about 75% to about 99%, or about 80% to about 99%, or about 85% to about 99%, or about 90% to about 99%, or about 95% to about 99% by weight of one or more non-reactive monomers. The functional groups of the first reactive segment and the second segment are capable of undergoing crosslinking reactions. The first reactive segments A and the second segment B are molecularly miscible before cure as expressed by their properties in the bulk state that are indicative of a single phase behavior or a single phase polymer. That is, the acrylic polymer is a single phase polymer prior to crosslinking. The acrylic polymer is a homogeneous polymer prior to crosslinking. The acrylic polymer is a homogeneous polymer at room temperature.

[0022] In some embodiments, the acrylic polymer is a single phase polymer at room temperature. In another embodiment, the acrylic polymer is a single phase liquid polymer prior to

crosslinking. In yet another embodiment, the acrylic polymer is a single phase liquid polymer at room temperature. In certain embodiments, the acrylic polymer is a homogeneous liquid polymer prior to crosslinking. In some embodiments, the acrylic polymer is a homogeneous liquid polymer at room temperature. In another embodiment, the acrylic polymer is a liquid polymer prior to crosslinking. In yet another embodiment, the acrylic polymer is a liquid polymer at room temperature. In still another embodiment, the acrylic polymer exhibits no heterogeneity prior to crosslinking. In yet another embodiment, the acrylic polymer exhibits no heterogeneity at room temperature.

[0023] In another aspect, the present subject matter provides an acrylic polymer comprising two second segments B and one first reactive segment A, wherein the segments B may be positioned on either side of the middle segment A on the polymer chain to define a BAB structure.

[0024] In another aspect, the present subject matter provides a pressure sensitive adhesive composition comprising at least one acrylic block copolymer including (i) a first reactive segment of controlled molecular weight and position that includes at least one monomer having a functional group selected from the group consisting of a UV active functional group, a reactive functional group, a non-reactive functional group, and combinations thereof, and (ii) a second segment of controlled molecular weight and position that includes at least one monomer having a functional group selected from the group consisting of a reactive functional group, a non-reactive functional group, and combinations thereof. The reactive functionalities in the first reactive segment and the second segment may be the same or different from one another. The non-reactive functionalities in the first reactive segment and the second segment may be the same or different from one another. In some embodiments, the first reactive segment includes at least one monomer having a UV active functional group, at least one monomer having a reactive functional group, and at least one monomer having a non-reactive functional group. The second segment includes at least one monomer having a reactive functional group and at least one monomer having a non-reactive functional group. In other embodiments, the first reactive segment includes at least one monomer having a UV active functional group and at least one monomer having a non-reactive functional group. The second segment includes at least one monomer having a having a non-reactive functional group or at least one monomer having only a non-reactive functional group. The second segment is non-reactive with the UV active functional group or the reactive functional group. The at least one monomer having a non-reactive functional group is non-reactive with the UV active functional group and/or the reactive functional group. The first reactive segment and the second segment may be positioned adjacent to the polymer chain ends. The reactive functional groups and/or the non-reactive functional groups may be spaced apart along the length of

the polymer chain. That is, the reactive functional groups and/or the non-reactive functional groups may be spaced apart along the length of the first reactive segment and/or along the length of the second segment. The reactive functional groups and/or the non-reactive functional groups may be randomly spaced apart along the length of the polymer chain. That is, the reactive functional groups and/or the non-reactive functional groups may be randomly spaced apart along the length of the first reactive segment and/or along the length of the second segment. The at least one monomer having a UV active functional group is about 10% or less, or about 5% or less, or about 4% or less, or about 3% or less by weight of the total polymer weight. The first reactive segment comprises 40% or less, 30% or less, 20% or less, 10% or less, 5% or less, or 3% or less of the total polymer molecular weight. The first reactive segment(s) include about 40% to about 99%, or about 45% to about 99%, or about 50% to about 99%, or about 55% to about 99%, or about 60% to about 99%, or about 65% to about 99%, or about 70% to about 99%, or about 75% to about 99%, or about 80% to about 99%, or about 85% to about 99%, or about 90% to about 99%, or about 95% to about 99% by weight of one or more non-reactive monomers. The functional groups of the first reactive segment and the second segment are capable of undergoing crosslinking reactions. The first reactive segment and the second segment are molecularly miscible before cure as expressed by their properties in the bulk state that are indicative of a single phase behavior or a single phase polymer. That is, the acrylic polymer is a single phase polymer prior to crosslinking. The acrylic polymer is a homogeneous polymer prior to crosslinking. The acrylic polymer is a homogeneous polymer at room temperature.

[0025] In some embodiments, the acrylic polymer is a single phase polymer at room temperature. In another embodiment, the acrylic polymer is a single phase liquid polymer prior to crosslinking. In yet another embodiment, the acrylic polymer is a single phase liquid polymer at room temperature. In certain embodiments, the acrylic polymer is a homogeneous liquid polymer prior to crosslinking. In some embodiments, the acrylic polymer is a homogeneous liquid polymer at room temperature. In another embodiment, the acrylic polymer is a liquid polymer prior to crosslinking. In yet another embodiment, the acrylic polymer is a liquid polymer at room temperature. In still another embodiment, the acrylic polymer exhibits no heterogeneity prior to crosslinking. In yet another embodiment, the acrylic polymer exhibits no heterogeneity at room temperature.

[0026] A widely acceptable quantitative description of a pressure sensitive adhesive (PSA) is given by the Dahlquist criterion, which indicates that materials having an elastic modulus (G') of less than 3×10^6 dynes/cm² (i.e., 3×10^5 Pa) on a 1-s time scale at the test temperature have PSA properties while materials having a G' in excess of this value do not. Empirically, it was found that materials that

exhibit pressure sensitivity are those that are sufficiently soft, exhibiting an elastic modulus of less than 3×10^5 Pa (3×10^6 dyn/cm²) on a 1-s time scale at the test temperature. This somewhat surprising but well accepted empirical criterion was first established by Dahlquist and is commonly referred as the "Dahlquist criterion". Exemplary PSAs of the instant application shown in Figure 12 display plateau elastic/storage modulus (G') of less than 3×10^6 dynes/cm² (i.e., 3×10^5 Pa) at room temperature indicating that the adhesives contemplated in the instant application are PSAs.

[0027] In still another aspect, the present subject matter provides a method of preparing a pressure sensitive adhesive composition comprising polymerizing using a controlled radical polymerization process at least one monomer having a functional group selected from the group consisting of a UV active functional group, a reactive functional group, a non-reactive functional group, and combinations thereof to thereby form a first reactive segment of controlled molecular weight and position. The method also comprises polymerizing using a controlled radical polymerization process at least one monomer having a functional group selected from the group consisting of a reactive functional group, a non-reactive functional group, and combinations thereof to thereby form a second segment of controlled molecular weight and position. The reactive functionalities in the first reactive segment and the second segment may be the same or different from one another. The non-reactive functionalities in the first reactive segment and the second segment may be the same or different from one another. In some embodiments, the first reactive segment includes at least one monomer having a UV active functional group, at least one monomer having a reactive functional group, and at least one monomer having a non-reactive functional group. The second segment includes at least one monomer having a reactive functional group and at least one monomer having a non-reactive functional group. In other embodiments, the first reactive segment includes at least one monomer having a UV active functional group and at least one monomer having a non-reactive functional group. The second segment includes at least one monomer having a non-reactive functional group or at least one monomer having only a non-reactive functional group. The second segment is non-reactive with the UV active functional group or the reactive functional group. The at least one monomer having a non-reactive functional group is non-reactive with the UV active functional group and/or the reactive functional group. The first reactive segment and the second segment may be positioned adjacent to the polymer chain ends. The reactive functional groups and/or the non-reactive functional groups may be spaced apart along the length of the polymer chain. That is, the reactive functional groups and/or the non-reactive functional groups may be spaced apart along the length of the first reactive segment and/or along the length of the second segment. The reactive functional groups and/or the non-reactive functional groups may be

randomly spaced apart along the length of the polymer chain. That is, the reactive functional groups and/or the non-reactive functional groups may be randomly spaced apart along the length of the first reactive segment and/or along the length of the second segment. The at least one monomer having a UV active functional group is about 10% or less, or about 5% or less, or about 4% or less, or about 3% or less by weight of the total polymer weight. The first reactive segment comprises 40% or less, 30% or less, 20% or less, 10% or less, 5% or less, or 3% or less of the total polymer molecular weight. The first reactive segment(s) include about 40% to about 99%, or about 45% to about 99%, or about 50% to about 99%, or about 55% to about 99%, or about 60% to about 99%, or about 65% to about 99%, or about 70% to about 99%, or about 75% to about 99%, or about 80% to about 99%, or about 85% to about 99%, or about 90% to about 99%, or about 95% to about 99% by weight of one or more non-reactive monomers. The functional groups of the first reactive segment and the second segment are capable of undergoing crosslinking reactions. At least one of the first reactive segment and the second segment includes an acrylate group. The method also comprises forming an acrylic polymer from the first reactive segment and the second segment. The method additionally comprises crosslinking the acrylic polymer by mixing the acrylic polymer with an amount of a crosslinking agent. The first reactive segment and the second segment are molecularly miscible before cure as expressed by their properties in the bulk state that are indicative of a single phase behavior or a single phase polymer. That is, the acrylic polymer is a single phase polymer prior to crosslinking. The acrylic polymer is a homogeneous polymer prior to crosslinking. The acrylic polymer is a homogeneous polymer at room temperature.

[0028] In some embodiments, the acrylic polymer is a single phase polymer at room temperature. In another embodiment, the acrylic polymer is a single phase liquid polymer prior to crosslinking. In yet another embodiment, the acrylic polymer is a single phase liquid polymer at room temperature. In certain embodiments, the acrylic polymer is a homogeneous liquid polymer prior to crosslinking. In some embodiments, the acrylic polymer is a homogeneous liquid polymer at room temperature. In another embodiment, the acrylic polymer is a liquid polymer prior to crosslinking. In yet another embodiment, the acrylic polymer is a liquid polymer at room temperature. In still another embodiment, the acrylic polymer exhibits no heterogeneity prior to crosslinking. In yet another embodiment, the acrylic polymer exhibits no heterogeneity at room temperature.

[0029] In yet another aspect, the present subject matter provides an adhesive article comprising a substrate and an adhesive disposed on the substrate. The adhesive includes at least one acrylic block copolymer having (i) a first reactive segment of controlled molecular weight and position that includes at least one monomer having a functional group selected from the group consisting of a

UV active functional group, a reactive functional group, a non-reactive functional group, and combinations thereof, and (ii) a second segment of controlled molecular weight and position that includes at least one monomer having a functional group selected from the group consisting of a reactive functional group, a non-reactive functional group, and combinations thereof. The reactive functionalities in the first reactive segment and the second segment may be the same or different from one another. The non-reactive functionalities in the first reactive segment and the second segment may be the same or different from one another. In some embodiments, the first reactive segment includes at least one monomer having a UV active functional group, at least one monomer having a reactive functional group, and at least one monomer having a non-reactive functional group. The second segment includes at least one monomer having a reactive functional group and at least one monomer having a non-reactive functional group. In other embodiments, the first reactive segment includes at least one monomer having a UV active functional group and at least one monomer having a non-reactive functional group. The second segment includes at least one monomer having a non-reactive functional group or at least one monomer having only a non-reactive functional group. The second segment is non-reactive with the UV active functional group or the reactive functional group. The at least one monomer having a non-reactive functional group is non-reactive with the UV active functional group and/or the reactive functional group. The first reactive segment and the second segment may be positioned adjacent to the polymer chain ends. The reactive functional groups and/or the non-reactive functional groups are spaced apart along the length of the polymer chain. That is, the reactive functional groups and/or the non-reactive functional groups may be spaced apart along the length of the first reactive segment and/or along the length of the second segment. The reactive functional groups and/or the non-reactive functional groups may be randomly spaced apart along the length of the polymer chain. That is, the reactive functional groups and/or the non-reactive functional groups may be randomly spaced apart along the length of the first reactive segment and/or along the length of the second segment. The at least one monomer having a UV active functional group is about 10% or less, or about 5% or less, or about 4% or less, or about 3% or less by weight of the total polymer weight. The first reactive segment comprises 40% or less, 30% or less, 20% or less, 10% or less, 5% or less, or 3% or less of the total polymer molecular weight. The first reactive segment(s) include about 40% to about 99%, or about 45% to about 99%, or about 50% to about 99%, or about 55% to about 99%, or about 60% to about 99%, or about 65% to about 99%, or about 70% to about 99%, or about 75% to about 99%, or about 80% to about 99%, or about 85% to about 99%, or about 90% to about 99%, or about 95% to about 99% by weight of one or more non-reactive monomers. The functional groups of

the first reactive segment and the second segment are capable of undergoing crosslinking reactions. The first reactive segment and the second segment are molecularly miscible before cure as expressed by their properties in the bulk state that are indicative of a single phase behavior or a single phase polymer. That is, the acrylic polymer is a single phase polymer prior to crosslinking. The acrylic polymer is a homogeneous polymer prior to crosslinking. The acrylic polymer is a homogeneous polymer at room temperature.

[0030] In some embodiments, the acrylic polymer is a single phase polymer at room temperature. In another embodiment, the acrylic polymer is a single phase liquid polymer prior to crosslinking. In yet another embodiment, the acrylic polymer is a single phase liquid polymer at room temperature. In still another embodiment, the acrylic polymer is a homogeneous polymer prior to crosslinking. In yet another embodiment, the acrylic polymer is a homogeneous polymer at room temperature. In certain embodiments, the acrylic polymer is a homogeneous liquid polymer prior to crosslinking. In some embodiments, the acrylic polymer is a homogeneous liquid polymer at room temperature. In another embodiment, the acrylic polymer is a liquid polymer prior to crosslinking. In yet another embodiment, the acrylic polymer is a liquid polymer at room temperature. In still another embodiment, the acrylic polymer exhibits no heterogeneity prior to crosslinking. In yet another embodiment, the acrylic polymer exhibits no heterogeneity at room temperature.

[0031] As used herein, room temperature is from about 15° to about 25°C. As used herein, the term “liquid at room temperature” means a polymer that undergoes a degree of cold flow at room temperature. Cold flow is the distortion, deformation or dimensional change that takes place in materials under continuous load at temperatures within the working range. Cold flow is not due to heat softening.

BRIEF DESCRIPTION OF DRAWINGS

[0032] Figure 1 is a process schematic diagram showing a representative process and system for producing an adhesive in accordance with the present subject matter.

[0033] Figure 2 is a schematic illustration of a tape article including an adhesive in accordance with the present subject matter.

[0034] Figure 3 is a schematic cross sectional view of another tape article in accordance with the present subject matter.

[0035] Figure 4 is a schematic cross sectional view of another tape article in accordance with the present subject matter.

[0036] Figure 5 is a schematic cross sectional view of another tape article in accordance with the present subject matter.

[0037] Figure 6 is a schematic cross sectional view of another tape article in accordance with the present subject matter.

[0038] Figure 7 is a schematic cross sectional view of a sealing or closure assembly including a region of an adhesive in accordance with the present subject matter.

[0039] Figure 8 is a graph of adhesion versus dosage for samples described in examples herein.

[0040] Figure 9 is a graph of percentage of insolubles versus dosage for samples described in examples herein.

[0041] Figure 10 is a graph of melt flow viscosity versus temperature for samples of Example 1 herein.

[0042] Figure 11 is a graph of melt flow viscosity versus temperature for samples of Example 6 herein.

[0043] Figure 12 is a plot of elastic/storage modulus as a function of temperature for samples of Examples 1-3, 5, and 6 described herein.

[0044] Figure 13 is a plot of tan (δ) versus temperature for samples of Examples 1-3, 5, and 6 described herein.

DETAILED DESCRIPTION

[0045] As used herein, terms such as "typically" are not intended to limit the scope of the claimed invention or to imply that certain features are critical, essential, or even important to the structure or function of the claimed invention. Rather, these terms are merely intended to highlight alternative or additional features that may or may not be utilized in a particular embodiment of the present invention.

[0046] As used herein, the terms "comprise(s)," "include(s)," "having," "has," "contain(s)," and variants thereof, are intended to be open-ended transitional phrases, terms, or words that do not preclude the possibility of additional acts or structure.

[0047] As used herein, the term "polymer" may refer to a polymeric compound prepared by polymerizing monomers, whether of the same or a different type. The generic term "polymer" embraces the terms "homopolymer," "copolymer", and the like.

[0048] Acrylic copolymers prepared by sequential polymerization of polymer segments from various monomers are provided. In certain embodiments, the copolymers contain a first reactive segment at a polymer chain end and at least one other or a second segment at another polymer chain end. The first reactive segment includes at least one functional group that is capable of undergoing a crosslinking reaction. The second segment may also include at least one functional group that is capable of undergoing a crosslinking reaction. The reactive segments have controlled size and placement for tailored properties. For example, by selectively placing functional groups in desirable positions on a polymer molecule, polymers that yield pressure sensitive adhesives that exhibit enhanced balance between cohesion and adhesion can be produced. In certain embodiments the polymers also include a third segment which is located between the first reactive segment and the second segment. The third segment may include at least one reactive functionality and/or a non-reactive functionality. Also provided are adhesive compositions based upon the various polymers, and methods of preparing the polymers.

[0049] High modulus elastomers and high strength adhesives typically display a constant modulus as a function of temperature. Conversely, highly extensible, tough elastomers, and high tack and peel adhesives often have a degree of viscous liquid character. One route to this behavior is through control of crosslink density via placement of reactive functionalities in specific segments of the polymer. Placing reactive functionalities in segments adjacent to the polymer end groups yields high modulus and high strength upon crosslinking. Placing the reactive functionalities in the central segment(s) of the polymer yields significant viscous liquid character. As described herein, the present subject matter provides strategies for controlling the structure and architecture of polymers and thereby enabling production of compositions having specific and desired characteristics.

Polymers and Crosslinkable Compositions

[0050] Generally, the present subject matter provides an acrylic polymer having a first reactive segment that includes at least one monomer having a functional group selected from the group consisting of a UV active functional group, a reactive functional group, a non-reactive functional group, and combinations thereof, and a second segment that includes at least one monomer having a functional group selected from the group consisting of a reactive functional group, a non-reactive functional group, and combinations thereof. The reactive functionalities in the first reactive segment and the second segment may be the same or different from one another. The non-reactive functionalities in the first reactive segment and the second segment may be the same or different from

one another. A wide array of reactive functionalities can be included in the first reactive segment and second segment.

[0051] The first and second reactive segments are defined by (i) the type of monomers (i.e., UV active, reactive, and non-reactive monomers) present in the particular segment and (ii) the ratio of the non-reactive monomers in each segment. The present subject matter provides an acrylic polymer and/or a pressure sensitive adhesive (PSA) comprising or consisting of, amongst other features, a triblock acrylic copolymer having a $\{(A)(B)(C)\}\text{-}\{(B)(C)\}\text{-}\{(C)(B)(A)\}$ structure or a $\{(A)(B)(C)\}\text{-}\{(C)\}\text{-}\{(C)(B)(A)\}$ structure, or a $\{(A)(C)\}\text{-}\{(C)\}\text{-}\{(C)(A)\}$ structure, where A represents the at least one monomer having a UV functional group, B represents the at least one monomer having a reactive functional group, and C represents the at least one monomer having a non-reactive functional group. And $\{(A)(B)(C)\}$ and $\{(A)(C)\}$ represent the first reactive segment(s) while $\{(B)(C)\}$ and $\{(C)\}$ represent the second reactive segment(s). That is, the first reactive segment(s) includes a UV active monomer, a reactive monomer, and a non-reactive monomer or the first reactive segment(s) includes a UV active monomer and a non-reactive monomer, while the second reactive segment includes a reactive monomer and a non-reactive monomer or the second reactive segment includes only non-reactive monomers. The at least one monomer having a UV active functional group is about 10% or less, or about 5% or less, or about 4% or less, or about 3% or less by weight of the total polymer weight. The at least one monomer having a reactive functional group in the first reactive segment and the at least one monomer having a reactive functional group in the second reactive segment may be the same type of monomer(s) or different type of monomer(s). The at least one monomer having a non-reactive functional group in the first reactive segment and the at least one monomer having a non-reactive functional group in the second reactive segment may be the same type of monomer(s) or different type of monomer(s). The first reactive segment(s) comprises 40% or less, 30% or less, 20% or less, 10% or less, 5% or less, or 3% or less of the total polymer molecular weight. The first reactive segment(s) include about 40% to about 99%, or about 45% to about 99%, or about 50% to about 99%, or about 55% to about 99%, or about 60% to about 99%, or about 65% to about 99%, or about 70% to about 99%, or about 75% to about 99%, or about 80% to about 99%, or about 85% to about 99%, or about 90% to about 99%, or about 95% to about 99% by weight of one or more non-reactive monomers. The first reactive segment(s) include about 40% to about 99%, or about 45% to about 99%, or about 50% to about 99%, or about 55% to about 99%, or about 60% to about 99%, or about 65% to about 99%, or about 70% to about 99%, or about 75% to about 99%, or about 80% to about 99%, or about 85% to about 99%, or about 90% to about 99%, or about 95% to about 99% by weight of one or more monomers of the second reactive segment.

[0052] The present subject matter provides an acrylic polymer and/or a pressure sensitive adhesive (PSA) comprising or consisting of, amongst other features, a diblock acrylic copolymer having a $\{(A)(B)(C)\}-\{(B)(C)\}$ structure or a $\{(A)(C)\}-\{(C)\}$ structure, where A represents the at least one monomer having a UV functional group, B represents the at least one monomer having a reactive functional group, and C represents the at least one monomer having a non-reactive functional group. And $\{(A)(B)(C)\}$ and $\{(A)(C)\}$ represent the first reactive segment(s) while $\{(B)(C)\}$ and $\{(C)\}$ represent the second reactive segment(s). That is, the first reactive segment(s) includes a UV active monomer, a reactive monomer, and a non-reactive monomer or the first reactive segment(s) includes a UV active monomer and a non-reactive monomer, while the second reactive segment includes a reactive monomer and a non-reactive monomer or the second reactive segment includes only non-reactive monomers. The at least one monomer having a UV active functional group is about 10% or less, or about 5% or less, or about 4% or less, or about 3% or less by weight of the total polymer weight. The at least one monomer having a reactive functional group in the first reactive segment and the at least one monomer having a reactive functional group in the second reactive segment may be the same type of monomer(s) or different type of monomer(s). The at least one monomer having a non-reactive functional group in the first reactive segment and the at least one monomer having a non-reactive functional group in the second reactive segment may be the same type of monomer(s) or different type of monomer(s). The first reactive segment(s) comprises 40% or less, 30% or less, 20% or less, 10% or less, 5% or less, or 3% or less of the total polymer molecular weight. The first reactive segment(s) include about 40% to about 99%, or about 45% to about 99%, or about 50% to about 99%, or about 55% to about 99%, or about 60% to about 99%, or about 65% to about 99%, or about 70% to about 99%, or about 75% to about 99%, or about 80% to about 99%, or about 85% to about 99%, or about 90% to about 99%, or about 95% to about 99% by weight of one or more non-reactive monomers. The first reactive segment(s) include about 40% to about 99%, or about 45% to about 99%, or about 50% to about 99%, or about 55% to about 99%, or about 60% to about 99%, or about 65% to about 99%, or about 70% to about 99%, or about 75% to about 99%, or about 80% to about 99%, or about 85% to about 99%, or about 90% to about 99%, or about 95% to about 99% by weight of one or more monomers of the second reactive segment.

[0053] As used herein, the term “reactive functional group” refers to a functional group that is capable of reacting with another functional group that is not UV-activatable. Stated differently, as used herein, the term “reactive functional group” refers to a functional group that is crosslinkable but is not UV-activatable. Non-limiting examples of reactive functional groups include hydroxyl, carboxyl,

carbonyl, carbonate ester, isocyanate, epoxy, vinyl, amine, amide, imide, anhydride, mercapto (thiol), acid, acrylamide, acetoacetyl groups, alkoxymethylol, cyclic ether groups, and combinations thereof.

[0054] In another embodiment of the subject matter, there is provided a crosslinkable composition comprising at least one acrylic copolymer having a first reactive segment of controlled size and position and at least one other or second segment of controlled size and position. The first reactive segment comprises at least one monomer having a functional group selected from the group consisting of a UV active functional group, a reactive functional group, a non-reactive functional group, and combinations thereof. The other or second segment comprises at least one monomer having a functional group selected from the group consisting of a reactive functional group, a non-reactive functional group, and combinations thereof. The functional groups of the first reactive segment and the second segment are capable of undergoing crosslinking reactions. The acrylic copolymer of the crosslinkable composition may in certain embodiments also comprise a third polymeric segment. The third polymeric segment may include a reactive functionality and/or a non-reactive functionality. Additional aspects as described in conjunction with the previously described embodiments of the acrylic copolymers are included in the examples described herein.

[0055] In certain embodiments, the acrylic copolymers may include at least one monomer having a non-reactive functional group. The at least one monomer having a non-reactive functional group may be derived from acrylates, methacrylates, or mixtures thereof. The acrylates include C₁ to about C₂₀ alkyl, aryl or cyclic acrylates such as methyl acrylate, ethyl acrylate, phenyl acrylate, butyl acrylate, 2-ethylhexyl acrylate, n-hexyl acrylate, n-heptyl acrylate, n-octyl acrylate, n-nonyl acrylate, isobornyl acrylate, 2-propyl heptyl acrylate, isodecyl acrylate, isostearyl acrylate and the like. These moieties typically contain from about 3 to about 20 carbon atoms, and in one embodiment about 3 to about 8 carbon atoms. The methacrylates include C₁ to about C₂₀ alkyl, aryl or cyclic methacrylates such as methyl methacrylate, ethyl methacrylate, butyl methacrylate, 2-ethylhexyl methacrylate, phenyl methacrylate, isobornyl methacrylate, isooctyl methacrylate, and the like. These moieties typically contain from about 4 to about 20 carbon atoms, and in one embodiment about 3 to about 10 carbon atoms.

[0056] In certain embodiments, the acrylic polymers contemplated herein exhibit relatively narrow ranges of molecular weight and thus have relatively low polydispersity values. Typically, the polymers exhibit polydispersity (Pdi) values of greater than 1.0, or greater than 1.5, or greater than 2.0, or greater than 2.5, or greater than 3.0, or greater than greater than 3.5, or greater than 4.0. In certain embodiments, the polymers contemplated herein exhibit polydispersity (Pdi) values of less than 4.0, or

less than 3.5, or less than 3.0, or less than 2.5, or less than 2.0. In certain embodiments, the polymers exhibit polydispersities of less than 1.5, or as low as about 1.4.

[0057] In certain embodiments, the polymers typically have a number average molecular weight (M_n) of from about 5,000 g/mol to about 150,000 g/mol, or from about 10,000 g/mol to about 150,000 g/mol, or from about 40,000 g/mol to about 150,000 g/mol, or from about 50,000 g/mol to about 110,000 g/mol, or from about 30,000 g/mol to about 80,000 g/mol, or from about 10,000 g/mol to about 30,000 g/mol.

[0058] In certain embodiments, the polymers typically have a weight average molecular weight (M_w) of from about 50,000 g/mol to about 1,000,000 g/mol, or from about 100,000 g/mol to about 500,000 g/mol, or from about 100,000 g/mol to about 250,000 g/mol. However, it will be appreciated that the subject matter includes polymers having molecular weights and/or polydispersity values greater than or less than the values noted herein.


[0059] The average molecular (M_w) weight and polydispersity (PDI) were determined by gel permeation chromatography (GPC). The samples were evaluated on a Waters Acquity Advance Polymer Chromatography system. The eluent used was TetraHydroFuran (THF) containing stabilizer. Measurements were carried out at 35°C. Separation was carried out using the columns HSP Gel RT MB-M (1,000 to 4,000,000 Dalton range), HSP Gel HT MB-L/M (500-4,000,000 Dalton range), and HSP Gel HR 1.0 (100-1,000 Dalton range). The sample concentration was 2 g/l, the flow rate of 0.7 ml/min. Measurements were carried out against polystyrene standards.

Reactive Segments

[0060] In certain embodiments, the first reactive segment of the acrylic polymer may include a copolymer derived from one or more of the monomers of the second segment and at least one polymerizable comonomer having a crosslinkable functionality, the crosslinkable functionality selected from the group consisting of a UV active functional group, a reactive functional group, and combinations thereof.


[0061] In certain embodiments, the first reactive segment of the acrylic polymer may include a copolymer derived from at least one monomer having a non-reactive functional group and at least one polymerizable comonomer having a crosslinkable functionality, the crosslinkable functionality selected from the group consisting of a UV active functional group, a reactive functional group, and combinations thereof.

[0062] In certain embodiments, the at least one monomer having a non-reactive functional group may include at least one monomer derived from the formula (I):



where R_3 is H or CH_3 and R_4 is a branched or unbranched, saturated alkyl group having 4 to 14 carbon atoms.

[0063] In certain embodiments, the at least one monomer having a reactive functional group may include at least one functionalized monomer derived from the formula (I):



where R_3 is H or CH_3 and R_4 is a branched or unbranched, saturated alkyl group having 4 to 14 carbon atoms. The at least one functionalized monomer of the reactive functional group may include a crosslinkable functional group selected from the group consisting of hydroxyl, carboxyl, carbonyl, carbonate ester, isocyanate, epoxy, vinyl, amine, amide, imide, anhydride, mercapto (thiol), acid, acrylamide, acetoacetyl groups, alkoxymethylol, cyclic ether groups, and combinations thereof.

[0064] In certain embodiments, the at least one monomer having a reactive functional group may be derived from the formula (II):



where R is H or CH_3 and X includes a functional group capable of crosslinking. The crosslinkable functional group may include at least one functional group selected from the group consisting of hydroxyl, carboxyl, carbonyl, carbonate ester, isocyanate, epoxy, vinyl, amine, amide, imide, anhydride, mercapto (thiol), acid, acrylamide, acetoacetyl groups, alkoxymethylol, cyclic ether groups, and combinations thereof.

[0065] In certain embodiments, the first reactive segment of the acrylic polymer may include a copolymer derived from one or more of the monomers of the second segment and at least one monomer having a reactive functional group. The at least one monomer having a reactive functional group may be derived from the formula (II):



where R is H or CH₃ and X includes a functional group capable of crosslinking. The crosslinkable functional group may include at least one functional group selected from the group consisting of hydroxyl, carboxyl, carbonyl, carbonate ester, isocyanate, epoxy, vinyl, amine, amide, imide, anhydride, mercapto (thiol), acid, acrylamide, acetoacetyl groups, alkoxymethylol, cyclic ether groups, and combinations thereof.

[0066] Hydroxy functional monomers include, for example, hydroxy ethyl (meth)acrylate, hydroxy isopropyl (meth)acrylate, hydroxy butyl (meth)acrylate and the like.

[0067] Epoxy functional monomers include, for example, glycidyl methacrylate and glycidal acrylate. In certain embodiments, a particularly epoxy functional monomer is commercially available under the designation S-100 from Synasia. That monomer is 3, 4 epoxycyclohexylmethyl methacrylate, [CAS 82428-30-6], having a chemical formula C₁₁H₁₆O₃ and a molecular weight of 196.2.

[0068] The acid containing monomers include, for example, unsaturated carboxylic acids containing from 3 to about 20 carbon atoms. The unsaturated carboxylic acids include, among others, acrylic acid, methacrylic acid, itaconic acid, beta carboxy ethyl acrylate, mono-2-acryloyloxypropyl succinate, and the like. It is contemplated that phosphoric acids may be used.


[0069] Anhydride containing monomers include, for example, maleic anhydride, itaconic anhydride, citraconic anhydride and the like.

[0070] The acrylamides include, for example, acrylamide and its derivatives including the N-substituted alkyl and aryl derivatives thereof. These include N-methyl acrylamide, N,N-dimethyl acrylamide, t-octyl acrylamide and the like. The methacrylamides include methacrylamide and its derivatives including the N-substituted alkyl and aryl derivatives thereof.

[0071] Vinyl groups include, for example, vinyl esters, vinyl ethers, vinyl amides, and vinyl ketones. The vinyl esters include vinyl acetate, vinyl propionate, vinyl butyrate, vinyl valerate, vinyl

versitate, vinyl isobutyrate and the like. The vinyl ethers include vinyl ethers having 1 to about 8 carbon atoms including ethylvinyl ether, butylvinyl ether, 2-ethylhexylvinyl ether and the like. The vinyl amides include vinyl amides having 1 to about 8 carbon atoms including vinyl pyrrolidone, and the like. The vinyl ketones include vinyl ketones having 1 to about 8 carbon atoms including ethylvinyl ketone, butylvinyl ketone, and the like.

[0072] In another embodiment, the first reactive segment of the acrylic polymer may include a copolymer derived from one or more of the monomers of the second segment and at least one polymerizable comonomer having a crosslinkable functionality, the crosslinkable functionality selected from the group consisting of a UV active functional group, a reactive functional group, and combinations thereof. The at least one polymerizable comonomer having a reactive functional group includes at least one functionalized monomer derived from the formula (I):



where R_3 is H or CH_3 and R_4 is a branched or unbranched, saturated alkyl group having 4 to 14 carbon atoms. The at least one functionalized monomer may include a crosslinkable functional group selected from the group consisting of hydroxyl, carboxyl, carbonyl, carbonate ester, isocyanate, epoxy, vinyl, amine, amide, imide, anhydride, mercapto (thiol), acid, acrylamide, acetoacetyl groups, alkoxymethylol, cyclic ether groups, and combinations thereof.

[0073] In particular embodiments, the at least one polymerizable comonomer having a crosslinkable functionality includes a UV active functional group. Although a wide array of UV active functional groups can potentially be used, in certain embodiments the UV active functional group is selected from benzophenones, double bonds, and combinations thereof.

[0074] In many embodiments, the UV active functional group is represented by Formula (III) as follows:



in which R_1 and R_2 is each independently an organic radical selected from the group of methyl, aryl, and alkyl. In many embodiments, R_1 and/or R_2 is an aromatic or substituted aromatic group. In certain embodiments, R_1 and/or R_2 is a phenyl or substituted phenyl group. In particular embodiments, the UV active functional group includes acetophenone, an acetophenone derivative, benzophenone, a benzophenone derivative, anthraquinone, an anthraquinone derivative, benzile, a benzile derivative, thioxanthone, a thioxanthone derivative, xanthone, a xanthone derivative, a benzoin ether, a benzoin ether derivative, an alpha-ketol, an alpha-ketol derivative, and combinations thereof.

[0075] In many embodiments, the UV active functional group is a UV-activatable group, i.e., decomposes or is otherwise triggered to form reactive species that activate crosslinking of polymers.

[0076] It is also contemplated that the UV active functional group could include or be based upon aromatic sulfonyl chlorides, photoactive oximes, and azo-type initiators.

[0077] Furthermore, in many embodiments the UV active functional group can be one or more benzophenone, benzophenone derivatives, double bonds, and/or combinations of these with other UV active functional groups. It will be understood that the present subject matter is not limited to any of these noted UV active functional groups.

[0078] In still additional embodiments, the UV active functional group includes one or more photoinitiators.

[0079] Additionally, the present subject matter may include the use of one or more other UV active functional groups instead of, or in combination with the UV active functional groups described herein.

[0080] In certain embodiments, the UV active functional groups are incorporated along end segment(s) of the polymer. In particular embodiments, the UV active functional group(s) are entirely incorporated along an end segment or end segments with the reactive functional group(s) and/or the non-reactive functional group(s) randomly incorporated within the same end segment(s) that comprise 40% or less of the total polymer molecular weight, such that the remaining 60% or more of the polymer or polymer interior segment(s) is free of UV functional groups and includes reactive functional group(s) and/or non-reactive functional group(s) randomly incorporated therein.

[0081] In other particular embodiments, the UV active functional group(s) are entirely incorporated along an end segment or end segments with the reactive functional group(s) and/or the non-reactive functional group(s) randomly incorporated within the same end segment(s) that comprise 30% or less of the total polymer molecular weight, such that the remaining 70% or more of the polymer

or polymer interior segment(s) is free of UV functional groups and includes reactive functional group(s) and/or non-reactive functional group(s) randomly incorporated therein.

[0082] In still other particular embodiments, the UV active functional groups are entirely incorporated along an end segment or end segments with the reactive functional group(s) and/or the non-reactive functional group(s) randomly incorporated within the same end segment(s) that comprise 20% or less of the total polymer molecular weight, such that the remaining 80% or more of the polymer or polymer interior segment(s) is free of UV functional groups and includes reactive functional group(s) and/or non-reactive functional group(s) randomly incorporated therein.

[0083] And, in still other particular embodiments, the UV active functional group(s) are entirely incorporated along an end segment or end segments with the reactive functional group(s) and/or the non-reactive functional group(s) randomly incorporated within the same end segment(s) that comprise 10% or less of the total polymer molecular weight, such that the remaining 90% or more of the polymer or polymer interior segment(s) is free of UV functional groups and includes reactive functional group(s) and/or non-reactive functional group(s) randomly incorporated therein.

[0084] In yet another particular embodiment, the UV active functional groups are entirely incorporated along an end segment or end segments with the reactive functional group(s) and/or the non-reactive functional group(s) randomly incorporated within the same end segment(s) that comprise 5% or less of the total polymer molecular weight, such that the remaining 95% or more of the polymer or polymer interior segment(s) is free of UV functional groups and includes reactive functional group(s) and/or non-reactive functional group(s) randomly incorporated therein.

[0085] And, in still another more particular embodiment, the UV active functional groups are entirely incorporated along an end segment or end segments with the reactive functional group(s) and/or the non-reactive functional group(s) randomly incorporated within the same end segment(s) that comprise 3% or less of the total polymer molecular weight, such that the remaining 97% or more of the polymer or polymer interior segment(s) is free of UV functional groups and includes reactive functional group(s) and/or non-reactive functional group(s) randomly incorporated therein.

Methods

[0086] The present subject matter also provides, in another embodiment, a multiple step polymerization process for making a crosslinkable acrylic copolymer having a first reactive segment with polymerization process for making a crosslinkable acrylic copolymer having a first reactive segment having one or more functional groups selected from the group consisting of a UV active functional

group, a reactive functional group, a non-reactive functional group, and combinations thereof provided by at least one monomer. Preferably, the monomer is an acrylic monomer. A second segment is added to the first segment to form the acrylic copolymer. The second segment may contain one or more functional groups selected from the group consisting of a reactive functional group, a non-reactive functional group, and combinations thereof and is miscible with the first reactive segment.

[0087] As used herein, the term “molecularly miscible” means a compound or mixture of compounds that exhibit properties in the bulk state that can be observed and/or measured by one of ordinary skill in the art and are indicative of single phase behavior or a single phase polymer. The term “single phase behavior” refers to behavior or physical properties that are uniform or substantially so. With respect to the acrylic copolymer, the observation of a single T_g is indicative of polymer segment miscibility. The single T_g is intermediate between those of the constituent polymer segments and varies monotonically between these values as the relative amounts of each segment changes. In contrast to single phase behavior evidenced by a molecularly miscible compound or mixture of compounds, at a given temperature, a phase separated compound demonstrates multiple, independent sets of properties that are attributable to the different phases of matter present therein. Such sets of properties include, without limitation, T_g, solubility parameters, refractive index, and physical state/phase of matter. Accordingly, the term “phase separated” is defined as two or more substances which are molecularly segregated due to one or more chemical and/or physical properties dependent upon, without limitation, polarity, molecular weight, relative amounts of the polymer segments, and T_g (phase of matter).

[0088] Evidence of immiscibility/incompatibility between blocks/segments of a block copolymer, such as an ABA block copolymer, can be confirmed via rheological measurements such as Dynamic Mechanical Analysis (DMA) or Differential Scanning Calorimetry (DSC) and the microstructure determined from microscopy. Miscible polymers exhibit no heterogeneity (i.e., are single phase polymers) in their microstructure. The degree of miscibility/compatibility of a polymer blend can be simply determined by measuring the glass transition temperature(s) in a DMA or DSC can. The presence of two T_gs indicates immiscibility, while the presence of only a single T_g indicates a miscible blend. For block copolymers with mutually incompatible blocks, the microdomains formed by the different blocks exhibit separate/different T_gs, and for incompatible block copolymers separate T_g values are also observed in the DMA and/or DSC plots. For example, for typical styrenic and acrylic ABA block copolymers, the hard A block and the soft B block have sufficiently different solubility parameters such that they are not thermodynamically compatible with each other. As a result, block copolymer-based

adhesives have a unique microphase-separated morphology, where A blocks form a hard phase embedded in a soft, continuous phase composed of B blocks. That is, a result of the frequent immiscibility/incompatibility of the two types of blocks present in ABA block copolymers, block copolymers generally exhibit two distinct glass transitions (a DMA bimodal $\tan \delta$ curve) at temperatures very close to those of the corresponding homopolymers. The presence of acid, however, in block copolymers such as P(MMA/MAA)-PBA-P(MMA/MAA) raises the T_g of the end block and also enhances the phase separation between the soft acrylate and the hard PMMA domains. Therefore, block copolymers can exhibit morphologies which range from two-phase segregated materials to single-phase homogeneous materials.

[0089] The acrylic polymers contemplated herein are architected polymers formed via a controlled free-radical process including selecting monomers that form homogeneous (single phase) acrylic block copolymers as evidenced by the presence of a single T_g peak shown in Figure 13, indicative of a homogeneous (single phase) polymer prior to crosslinking.

[0090] As used herein, the term “homogeneous polymer” is a block copolymer having substantially one morphological phase in the same state. For example, a block copolymer of two or more segments where one segment is miscible with another segment is said to be homogeneous in the liquid state. Such morphology is determined using atomic force microscopy (AFM) or scanning electron microscopy (SEM). By miscible is meant that the block copolymer of two or more segments exhibits single-phase behavior for the glass transition temperature, e.g. the T_g would exist as a single, sharp transition temperature on a dynamic mechanical thermal analyzer (DMTA) trace of $\tan \delta$ (the ratio of loss modulus to the storage modulus) versus temperature, as shown in the plots of Figure 13. By contrast, two separate transition temperatures would be observed for an immiscible block copolymer, typically corresponding to the temperatures for each of the individual segments of the block copolymer. Thus a block copolymer is miscible when there is one T_g indicated on the DMTA trace. A miscible block copolymer is homogeneous, while an immiscible block copolymer is heterogeneous.

[0091] In contrast, the term “heterogeneous polymer” means a block copolymer having two or more morphological phases in the same or different state. For example, a block copolymer of two segments where one segment forms discrete packets dispersed in a matrix of another segment is said to be heterogeneous. Also a heterogeneous polymer is defined to include co-continuous segments where the block copolymer components are separately visible, but it is unclear which is the continuous phase and which is the discontinuous phase. Such morphology is determined using scanning electron microscopy (SEM) or atomic force microscopy (AFM). By continuous phase is meant the matrix phase in

a heterogeneous block copolymer. By discontinuous phase is meant the dispersed phase in a heterogeneous block copolymer.

[0092] DMA was performed on a TA Instruments AR2000 rheometer fitted with parallel plate clamps. 1.0 mm thick samples were placed in the clamp and annealed at 70°C for 10 minutes to ensure good adhesion. The samples were then cooled to -60°C to begin a temp sweep to 150°C at a ramp rate of 3°C/min. During the temp ramp, the samples were oscillated at a frequency of 10 rad/sec.

[0093] Representative and non-limiting examples of ranges of glass transition temperatures (T_g) for the acrylic polymers and/or pressure sensitive adhesives of the present subject matter are from about 15° C to about -115° C, or from about 0° C to about -80° C, and/or from about -35° C to about -60° C.


Controlled Radical Polymerization

[0094] With conventional free-radical polymerization, polymers are terminated when the reactive free radical end group is destroyed via termination or chain transfer reactions. The termination and chain transfer processes are typically irreversible and yield a polymer that is inactive. The result of this is a broad molecular weight distribution and little control over the distribution of monomers in the polymer backbone. "Living" polymerization enables control over the polymer architecture, which includes molecular weight, molecular weight distribution (polydispersity), functionality, and composition. In living polymerization strategies, the occurrence of premature termination is minimized, and molecular weight proceeds linearly with time until all monomer is consumed or intentionally terminated. Controlled radical polymerizations involve reversible radical processes in which irreversible termination and chain transfer are largely absent. Controlled free radical polymerization includes three fundamental techniques, atom transfer radical polymerization (ATRP), reversible addition-fragmentation chain transfer (RAFT), and stable free radical polymerization (SFRP) (of which nitroxide mediated polymerization (NMP) is a subset). RAFT and SFRP are particularly useful methods because of their tolerance to a wide array of functional groups and their efficiency and versatility in producing controlled radical polymerized polymers.

[0095] The acrylic copolymers of the subject matter are prepared using any of the controlled radical polymerization processes, which include atom-transfer radical polymerization (ATRP); rapid addition-fragmentation chain transfer (RAFT); and stable free radical polymerization (SFRP). Nitroxide-mediated polymerization (NMP) is an example of an SFRP process.

[0096] ATRP involves the chain initiation of free radical polymerization by a halogenated organic species in the presence of a metal halide species. The metal has a number of different oxidation states that allows it to abstract a halide from the organohalide, creating a radical that then starts free radical polymerization. After initiation and propagation, the radical on the chain active chain terminus is reversibly terminated (with the halide) by reacting with the catalyst in its higher oxidation state. A simplified mechanism for reversible activation-deactivation of polymer chains during ATRP is shown in Scheme 1. Thus the redox process gives rise to an equilibrium between dormant (polymer-halide) and active (polymer-radical) chains. The equilibrium is designed to heavily favor the dormant state, which effectively reduces the radical concentration to sufficiently low levels to limit bimolecular coupling.

[0097] The initiator in ATRP is usually a low molecular weight activated organic halide (RX, R=activated alkyl, X=chlorine, bromine, iodine). However, organic pseudohalides (e.g., X=thiocyanate, azide) and compounds with weak N-X (e.g., N-bromosuccinimide) or S-X (e.g., sulfonyl halides) may be used. ATRP can be mediated by a variety of metals, including Ti, Mo, Re, Fe, Ru, Os, Rh, Co, Ni, Pd and Cu. Complexes of Cu offer the most efficient catalysts in the ATRP of a broad range of monomer in diverse media. Commonly used nitrogen-based ligands used in conjunction with Cu ATRP catalysts include derivatives of bidentate bipyridine and pyridine imine, tridentate diethylenetriamine and tetradentate tris[2-aminoethylene]amine and tetraazacyclotetradecane.

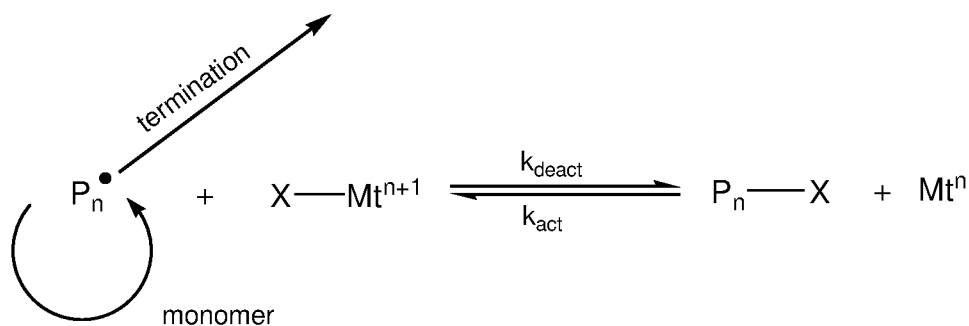

Scheme 1

[0098] Controlled polymerization by RAFT occurs via rapid chain transfer between growing polymer radicals and dormant polymer chains. After initiation, the control agent becomes part of the dormant polymer chain. The key mechanistic features of RAFT are illustrated in Scheme 2. Common RAFT agents contain thiocarbonyl-thio groups, and include, for example, dithioesters, dithiocarbamates, trithiocarbonates and xanthenes. Examples of useful RAFT agents include those described in “The


Chemistry of Radical Polymerization", Graeme Moad & David H. Solomon, 2nd rev. ed., 2006, Elsevier, p. 508-514, which is incorporated by reference herein.

[0099] Initiation and radical-radical termination occur as in conventional radical polymerization. In the early stages of the polymerization, addition of a propagating radical (P_n^*) to the thiocarbonylthio compound followed by fragmentation of the intermediate radical gives rise to a polymeric thiocarbonylthio compound and a new radical (R^*). Reaction of the radical (R^*) with monomer forms a new propagating radical (P_m^*). A rapid equilibrium between the active propagating radicals (P_n^* and P_m^*) and the dormant polymeric thiocarbonylthio compounds provides equal probability for all chains to grow and allows for the production of narrow dispersity polymers.

Initiation




Reversible chain transfer/propagation

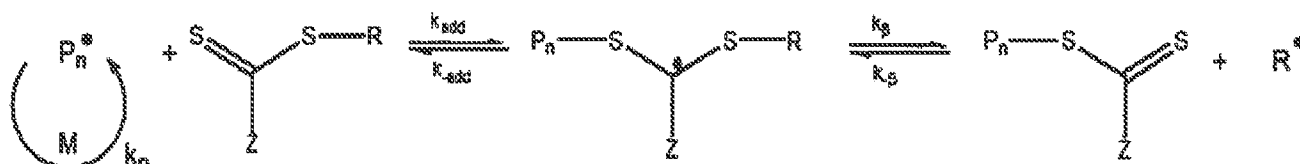

Reinitiation



Reversible (degenerate) chain transfer/propagation

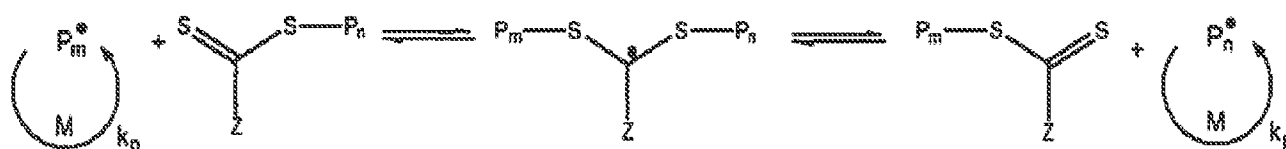


Termination



Scheme 2

[00100] SFRP, and in particular, NMP achieves control with dynamic equilibrium between dormant alkoxyamines and actively propagating radicals. The use of nitroxides to mediate (i.e., control) free radical polymerization has been developed extensively. Many different types of nitroxides have been described and there are many methods for producing nitroxides in-situ. Regardless of the nitroxide

or its method of generation, the key mechanistic feature of NMP is reversible coupling of the nitroxide (i.e., R₂NO) to a growing polymer chain radical (P[•]) as shown in Scheme 3.

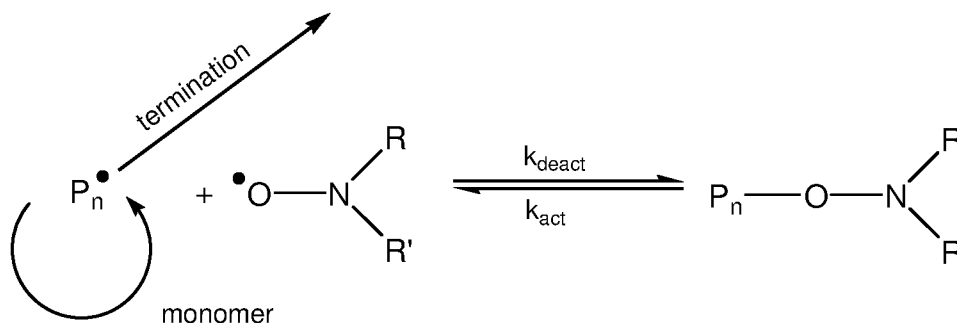

Scheme 3

[00101] Examples of useful NMP agents include those described in “The Chemistry of Radical Polymerization”, Graeme Moad & David H. Solomon, 2nd rev. ed., 2006, Elsevier, p. 473-475, which is incorporated by reference herein. An example of a commercially available NMP agent is BlocBuilder[®], an alkoxyamine compound that acts an initiator and control agent, available from Arkema.

[00102] The methods for forming the acrylic polymers contemplated herein may use one or more polymerization catalysts. The polymerization catalyst can be, for example, organic tin compounds, metal complexes, amine compounds and other basic compounds, organic phosphate compounds, and organic acids. Examples of the organic tin compounds include dibutyltin dilaurate, dibutyltin maleate, dibutyltin phthalate, stannous octoate, dibutyltin methoxide, dibutyltin diacetylacetate and dibutyltin diversatate. Examples of metal complexes are titanate compounds such as tetrabutyl titanate, tetraisopropyl titanate, and tetraethanolamine titanate; metal salts of carboxylic acids, such as lead octoate, lead naphthoate, and cobalt naphthoate; and metal acetylacetonate complexes such as aluminum acetylacetonate complex and vanadium acetylacetonate complex. The amine compounds and other basic compounds include, for example aminisilanes such as γ -aminopropyl trimethoxysilane and γ -aminopropyltriethoxysilane; quaternary ammonium salts such as tetramethylammonium chloride and benzalkonium chloride; and straight-chain or cyclic tertiary amines or quaternary ammonium salts each containing plural nitrogen atoms. The organic phosphate compounds include monomethyl phosphate, di-n-butyl phosphate and triphenyl phosphate. Examples of organic acid catalysts include alkyl sulfonic acids such as methane sulfonic acid, aryl sulfonic acids such as p-toluene sulfonic acid, benzene sulfonic acid, styrene sulfonic acid and the like.

Adhesives

[00103] Adhesives having a wide array of properties can be formed from the acrylic polymers and/or compositions described herein. Generally, the acrylic polymers described herein are crosslinked and optionally combined with one or more components to provide an adhesive composition. In certain embodiments, the adhesives are pressure sensitive adhesives. The polymer may be crosslinked during post curing of the adhesive to increase the cohesive strength of the pressure sensitive adhesive. This can be achieved via covalent crosslinking such as heat, actinic or electron beam radiation, or metal based ionic crosslinking between functional groups. Table 1 below lists representative examples of crosslinkers for various functional groups of the segmented polymer.


Table 1 – Crosslinkers

Functional Group of Segmented Polymer	Crosslinker
Hydroxyl	Isocyanate, Melamine Formaldehyde, Anhydride, Epoxy, Titanium esters and Chelates
Carboxylic acid, phosphoric acid	Aziridines, Isocyanate, Melamine Formaldehyde, Anhydride, Epoxy, Carboiimides, Metal Chelates, Titanium esters and Oxazolines
Isocyanate	Self-reactive, Carboxylic acid, Amine, Hydroxyl
Vinyl	Addition reaction with Silicone hydride
(Meth)acrylate	Amine, Mercaptan, Self-reactive with radical catalyst (UV, Thermal), Acetoacetate
Epoxy	Amine, Carboxylic acid, Phosphoric acid, Hydroxyl, Mercaptan
Amine	Isocyanate, Melamine formaldehyde, anhydride, epoxy, acetoacetate
Mercapto (thiol)	Isocyanate, Melamine formaldehyde, Anhydride, Epoxy
Acetoacetate	Acrylate, Amine
Alkoxyethylol	Acid, Hydroxyl, Thiol (Mercapto), Amine
Cyclic Ethers	Hydroxyl, Amines, Thiol (Mercapto)

[00104] Suitable polyfunctional aziridines include, for example, trimethylolpropane tris[3-aziridinylpropionate]; trimethylolpropane tris[3-(2-methylaziridinyl) propionate]; trimethylolpropane tris[2-aziridinylbutyrate]; tris(1-aziridinyl)-phosphine oxide; tris(2-methyl-1-aziridinyl)phosphine oxide;

penta-erythritoltris[3-(1-aziridinyl)propionate]; and pentaerythritol tetrakis[3-(1-aziridinyl)propionate]. Combinations of more than one polyfunctional aziridine may also be used. Examples of commercially available polyfunctional aziridines include NEOCRYL CX-100 from Zeneca Resins, believed to be trimethylolpropanen tris[3-(2-methylaziridinyl)-propanoate], and Xama-2, Xama-7 and Xama-220 from Bayer Material Science.

[00105] Multifunctional aziridine amides which have the general formula (IV):

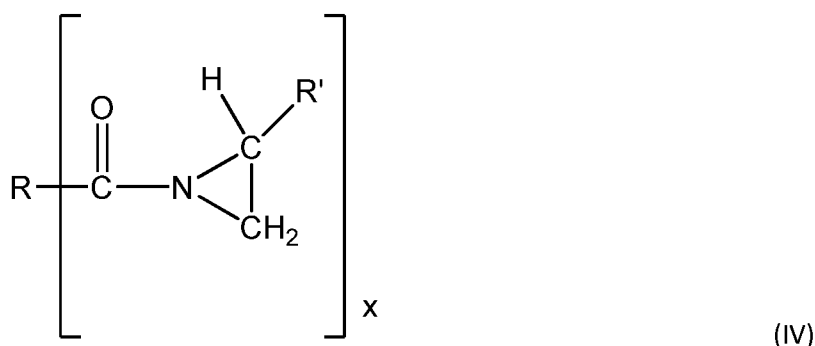

wherein R can be either an alkylene or aromatic group and R' can be a hydrogen or alkyl group and x is at least 2 may be used. Examples of suitable multifunctional aziridine amides include 1,1'-(1,3-phenylenedicarbonyl)bis[2-methyl aziridine]; 2,2,4-trimethyladipoyl bis [2-ethyl aziridine]; 1,1'-azelaoyl bis [2-methyl aziridine]; and 2,4,6-tris(2-ethyl-1-aziridinyl)-1,3,5 triazine.

[00106] Metal chelate crosslinking agents may be compounds prepared by coordinating multivalent metals such as Al, Fe, Zn, Sn, Ti, Sb, Mg and V with acetylacetone or ethyl acetoacetate.

[00107] Among the isocyanate crosslinking agents that can be used are aromatic, aliphatic and cycloaliphatic diisocyanates and triisocyanates. Examples include 2,4-toluene diisocyanate, m-phenylene diisocyanate, 4-chloro-1,3-phenylene diisocyanate, 3,3'-dimethyl-4,4'-diphenylene diisocyanate, 4,4'-diphenylene diisocyanate, xylene diisocyanate, 1,6-hexamethylene diisocyanate, 1,10-decamethylene diisocyanate, 1,4-cyclohexylene diisocyanate, 4,4'-methylene bis(cyclohexyl isocyanate), 1,5-tetrahydronaphthalene diisocyanate, paraxylylene diisocyanate, durene diisocyanate, 1,2,4-benzene diisocyanate, isoform diisocyanate, 1,4-tetramethylxylene diisocyanate, 1,5-naphthalene diisocyanate, or their reactants with polyol such as trimethylolpropane.

[00108] Other useful crosslinking agents include monomeric and polymeric melamine crosslinkers, such as Cymel 303 and 370 available from Cytec.

[00109] The crosslinking agent is typically used at a level from about 0.05% to about 5%, or from about 0.075% to about 2%, or from about 0.1% to about 1.5% by weight of adhesive solids.

[00110] Anhydride functional segmented polymers may be converted to silanes via a post polymerization reaction with amino-, mercapto- or hydroxyl-functional silanes. Examples of amino group-containing alkoxy silanes having a primary amino group alone as a reactive group include aminoalkyltrialkoxysilanes such as aminomethyltrimethoxysilane, aminomethyltriethoxysilane, β -aminoethyltrimethoxysilane, β -aminoethyltriethoxysilane, γ -aminopropyltrimethoxysilane, γ -aminopropyltriethoxysilane, γ -aminopropyltripropoxysilane, γ -aminopropyltriisopropoxysilane, and γ -aminopropyltributoxysilane; (aminoalkyl)-alkyldialkoxysilanes such as β -aminoethylmethyldimethoxysilane, γ -aminoethylmethyldiethoxysilane, γ -aminopropylmethyldimethoxysilane, γ -aminopropylmethyldiethoxysilane, and γ -aminopropylmethyldipropoxysilane; and corresponding aminoalkyldialkyl(mono)alkoxysilanes.


[00111] Examples of amino group-containing alkoxy silanes having a primary amino group and a secondary amino group as reactive groups include N-(aminoalkyl)aminoalkyltrialkoxysilanes such as N- β -(aminoethyl)- γ -aminopropyl-trimethoxysilane and N- β -(aminoethyl)- γ -aminopropyltriethoxysilane; and N-(aminoalkyl)aminoalkylalkyldialkoxysilanes such as N- β -(aminoethyl)- γ -amino-propylmethyldimethoxysilane and N- β -(aminoethyl)- γ -aminopropylmethyl-diethoxysilane.

[00112] Examples of amino group-containing alkoxy silanes having a secondary amino group alone as a reactive group include N-phenylamino-methyltrimethoxysilane and N-phenyl- β -aminoethyltrialkoxysilanes such as N-phenyl- β -aminoethyltrimethoxysilane and N-phenyl- β -aminoethyltriethoxysilane; N-phenyl- γ -aminopropyltrialkoxysilanes such as N-phenyl- γ -aminopropyltrimethoxysilane, N-phenyl- γ -aminopropyltriethoxysilane, N-phenyl- γ -aminopropyltripropoxysilane, and N-phenyl- γ -aminopropyltributoxysilane; corresponding N-phenylaminoalkyl(mono- or di-)alkyl(di- or mono-)alkoxysilanes; as well as N-alkylaminoalkyltrialkoxysilanes corresponding to the above-listed amino group-containing alkoxy silanes having a secondary amino group substituted with phenyl group, such as N-methyl-3-aminopropyltrimethoxysilane, N-ethyl-3-aminopropyltrimethoxysilane, N-n-propyl-3-aminopropyltrimethoxysilane, N-n-butyl-aminomethyltrimethoxysilane, N-n-butyl-2-aminoethyltrimethoxysilane, N-n-butyl-3-aminopropyltrimethoxysilane, N-n-butyl-3-aminopropyltriethoxysilane, and N-n-butyl-3-aminopropyltripropoxysilane, and corresponding N-alkylaminoalkyl(mono- or di-)alkyl(di- or mono)alkoxysilanes. Others include N-cyclohexylaminomethylmethyldiethoxy silane and N-cyclohexylaminomethyl-triethoxysilane.

[00113] Examples of the mercapto group-containing silanes include mercaptoalkyltrialkoxysilanes such as mercaptomethyltrimethoxysilane,

mercaptomethyltriethoxysilane, β -mercaptoethyltrimethoxysilane, β -mercapto-ethyltriethoxysilane, β -mercaptoethyltripropoxysilane, β -mercaptoethyl-triisopropoxysilane, β -mercaptoethyltributoxysilane, γ -mercaptopropyl-trimethoxysilane, γ -mercaptopropyltriethoxysilane, γ -mercaptopropyltri-propoxysilane, γ -mercaptopropyltriisopropoxysilane, and γ -mercapto-propyltributoxysilane; (mercaptoalkyl)alkyldialkoxysilanes such as β -mercaptoethylmethyldimethoxysilane, β -mercaptoethylmethyldiethoxysilane, γ -mercaptopropylmethyldimethoxysilane, γ -mercaptopropylmethyldiethoxysilane, γ -mercaptopropylmethyldipropoxysilane, β -mercaptopropylmethyldiisopropoxy-silane, γ -mercaptopropylmethyldibutoxysilane, β -mercaptopropylmethyldibutoxysilane, γ -mercaptopropylethyldimethoxy-silane, γ -mercaptopropylethyldiethoxysilane, γ -mercaptopropylethyldipropoxy-silane, γ -mercaptopropylethyldiisopropoxysilane, and γ -mercaptopropyl-ethyldibutoxysilane; and corresponding (mercaptoalkyl)dialkyl(mono)-alkoxysilanes.

[00114] Examples of hydroxyl-functional silanes include hydroxymethyltrialkoxo silanes having the formula (V):

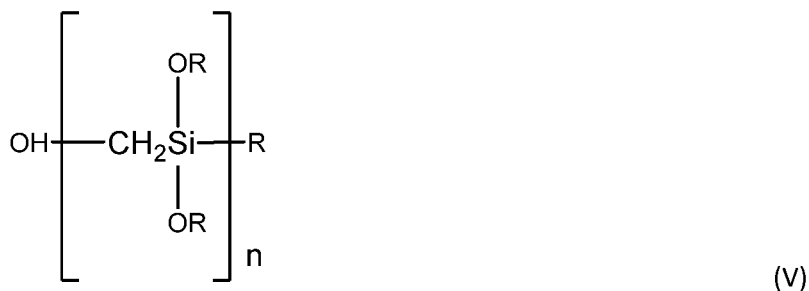

Where R is an alkyl group and n is at least 1. The alkyl group may be a lower alkyl group having 1 to 6 carbon atoms, or 1 to 3 carbon atoms. Particularly useful are the silanes in which the alkyl group is methyl or ethyl, namely hydroxymethyltriethoxysilane and hydroxymethyltriethoxysilane when n is equal to 1.

[00115] The adhesives of the present subject matter may further comprise additives such as pigments, fillers, plasticizer, diluents, antioxidants, tackifiers and the like. Pigment, if desired, is provided in an amount sufficient to impart the desired color to the adhesive. Examples of pigments include, without limitation, solid inorganic fillers such as carbon black, titanium dioxide and the like, and organic dyes. Additional inorganic fillers such as aluminum trihydrate, cristobalite, glass fibers, kaolin, precipitated or fumed silica, copper, quartz, wollastonite, mica, magnesium hydroxide, silicates (e.g.

feldspar), talc, nickel and calcium carbonate are also useful. Metal oxides such as aluminum trihydrate and magnesium hydroxide are particularly useful as flame retardants.

[00116] A wide variety of tackifiers can be used to enhance the tack and peel of the adhesive. These include rosins and rosin derivatives including rosinous materials that occur naturally in the oleoresin of pine trees, as well as derivatives thereof including rosin esters, modified rosins such as fractionated, hydrogenated, dehydrogenated, and polymerized rosins, modified rosin esters and the like.

[00117] There may also be employed terpene resins which are hydrocarbons of the formula $C_{10}H_{16}$, occurring in most essential oils and oleoresins of plants, and phenol modified terpene resins like alpha pinene, beta pinene, dipentene, limonene, myrecene, bornylene, camphene, and the like. Various aliphatic hydrocarbon resins like Escorez 1304, manufactured by Exxon Chemical Co., and aromatic hydrocarbon resins based on C_9 , C_5 , dicyclopentadiene, coumarone, indene, styrene, substituted styrenes and styrene derivatives and the like can also be used.

[00118] Hydrogenated and partially hydrogenated resins such as Regalrez 1018, Regalrez 1033, Regalrez 1078, Regalrez 1094, Regalrez 1126, Regalrez 3102, Regalrez 6108, etc., produced by Eastman Chemical Company, can be used. Various terpene phenolic resins of the type SP 560 and SP 553, manufactured and sold by Schenectady Chemical Inc., Nirez 1100, manufactured and sold by Reichold Chemical Inc., and Piccolyte S-100, manufactured and sold by Hercules Corporation, are particularly useful tackifiers for the present subject matter. Various mixed aliphatic and aromatic resins, such as Hercotex AD 1100, manufactured and sold by Hercules Corporation, can be used.

[00119] While the resins described above are quite useful for tackifying the copolymers of the instant subject matter, the particular tackifying resin and/or amount selected for a given formulation may depend upon the type of acrylic polymer being tackified. Many resins which are known in the prior art as being useful for tackifying acrylic based pressure sensitive adhesives can be effectively used in the practice of the present subject matter, although the scope of the subject matter is not limited to only such resins. Resins described in Satas, Handbook of Pressure Sensitive Adhesive Technology, Von Nostrand Reinhold, Co, Chap. 20, pages 527-584 (1989) (incorporated by reference herein) could be used.

[00120] The amount of tackifier used in the present subject matter is dependent upon the type of copolymer and tackifier used. Typically, pressure sensitive adhesive compositions prepared in accordance with the present subject matter will comprise from 5 to about 60% by weight total of one or more tackifiers.

[00121] In one embodiment, the tackifier has a ring and ball softening point of from about 100°C to about 150°C. In one embodiment, the tackifier comprises a terpene phenolic tackifier having a ring and ball softening point of from about 110°C to about 120°C.

[00122] In another embodiment, the added resin may serve a dual purpose. For example, a resin such as Wingstay L[®], a butylated reaction product of para-cresol and dicyclopentadiene with an average molecular weight of 650 produced by Eliokem, can serve both as a tackifier and an antioxidant.

[00123] In one embodiment, a low molecular weight polymeric additive is incorporated into the adhesive composition. The polymeric additive is polymerized from monomers selected from C₁-C₂₀ alkyl and cycloalkyl acrylates, C₁-C₂₀ alkyl and cycloalkyl methacrylates, free radical polymerizable olefinic acids, and optionally other ethylenically unsaturated monomers. Suitable alkyl and cycloalkyl acrylates include the various esters of acrylic acid such as methyl acrylate, ethyl acrylate, n-propyl acrylate, isopropyl acrylate, n-butyl acrylate, isobutyl acrylate, t-butyl acrylate, isobornyl acrylate, pentyl acrylate, hexyl acrylate, octyl acrylate, iso-octyl acrylate, nonyl acrylate, lauryl acrylate, stearyl acrylate, eicosyl acrylate, 2-ethylhexyl acrylate, cyclohexyl acrylate, cycloheptyl acrylate, and the like and mixtures thereof. Suitable alkyl and cycloalkyl methacrylate include the esters of methacrylic acid such as methyl methacrylate, ethyl methacrylate, propyl methacrylate, n-butyl methacrylate, t-butyl methacrylate, isobutyl methacrylate, pentyl methacrylate, hexyl methacrylate, cyclohexyl methacrylate, 2-ethylhexyl methacrylate, isobornyl methacrylate, heptyl methacrylate, cycloheptyl methacrylate, octyl methacrylate, iso-octyl methacrylate, nonyl methacrylate, decyl methacrylate, lauryl methacrylate, eicosyl methacrylate and the like and mixtures thereof. Suitable free-radical polymerizable olefinic acids include acrylic acid, methacrylic acid, fumaric acid, crotonic acid, itaconic acid, 2-acryloxypropionic acid, and the like and mixtures thereof.

[00124] Various amounts of other ethylenically-unsaturated monomers can optionally be used provided that the polymeric additive has a softening point greater than about 40°C and a number average molecular weight less than about 35,000. Optional ethylenically-unsaturated monomers suitable for use in the polymeric additive include, for example, styrene, alpha-methyl styrene, vinyl toluene, acrylonitrile, methacrylonitrile, ethylene, vinyl acetate, vinyl chloride, vinylidene chloride, acrylamide, methacrylamide 2-cyanoethyl acrylate, 2-cyanoethyl methacrylate, dimethylaminoethyl methacrylate, dimethylaminopropyl methacrylate t-butylaminoethyl methacrylate, glycidyl acrylate, glycidyl methacrylate, benzyl acrylate, benzyl methacrylate, phenyl acrylate, phenyl methacrylate and the like. The amount of the polymeric additive used may be in the range of about 1% to about 55% by

weight, based on the total weight of the adhesive composition. Such low molecular weight additives as described in US Patent No. 4,912,169, the disclosure of which is hereby incorporated by reference.

[00125] In certain embodiments, the adhesives have a relatively high solids content. Typically, the weight percentage of solids is greater than 50%, or at least 60%, or at least 70%.

[00126] In certain embodiments, the present subject matter adhesives or compositions are polymerized and/or crosslinked by exposure to actinic radiation, and particularly ultraviolet (UV) radiation or near UV radiation. Electron beam radiation can also be used. As will be appreciated, sufficient exposure to such radiation causes polymerization and/or crosslinking involving various functional groups incorporated in the polymers.

[00127] Use of the aspects described herein enable formulation of a pre-adhesive formulation that can be further processed by subsequent or additional exposure to actinic radiation and particularly UV radiation. Thus, an initial batch or a desired amount of pre-adhesive can be polymerized or at least partially polymerized in bulk and then stored or held for later application or coating to a substrate of interest.

[00128] After the adhesive is coated on a substrate at a desired coat weight, the coated substrate is irradiated with actinic radiation and particularly UV radiation to yield a crosslinked adhesive and in many embodiments a pressure sensitive adhesive having high cohesive strength at room and elevated temperatures. A variety of UV light sources are known, including low, high, and medium pressure mercury lamps, which emit over a wide range of wavelengths. Most pigmented and unpigmented adhesives can be readily cured using a medium pressure mercury lamp, which has emission bands ranging from about 240 to about 410 nanometers. Alternatively, UV sources that emit over a more narrow range of wavelengths can be used if desired, so long as the emission spectrum of the source overlaps with the absorption spectrum of the initiator(s) employed within the adhesive. Where the adhesive is pigmented with titanium dioxide or similar pigments, the preferred initiator has absorption bands in the near UV region, and a UV source that emits at least in that region is employed.

[00129] Figure 1 is a process schematic diagram depicting a representative process and system 10 for producing an adhesive and polymerizing and crosslinking the adhesive in accordance with the present subject matter. The system 10 generally comprises a dispenser or heater 12 for introducing one or more adhesives, polymers, and/or monomers via feed line 14 to a blender or mixer 22. Also provided are additional feed lines 16, 18, and 20 which can be selectively metering desired amounts of initiator, optional components and/or other monomers, and ancillary components or other additives to

the mixer 22. It will be appreciated that the initiator can be introduced in the form of polymerizable monomers which are polymerized with or separately from monomer(s) that form the adhesive.

[00130] After appropriate mixing of the adhesive, polymers and/or monomers, photoinitiators, and optional components, the resulting pre-adhesive is directed through line 24 to a reactor 26 which can be in the form of a tube reactor for example. The reactor 26 can be in a variety of different forms however typically defines an interior region for receiving adhesive or pre-adhesive. The reactor 26 is configured to allow actinic radiation such as UV radiation to enter the interior of the reactor from one or more radiation sources as described herein. The adhesive or pre-adhesive is directed through the reactor 26 and exposed to actinic radiation from UV emitters 28, 30 that emit UV light or radiation shown as rays 29, 31 for example, having a wavelength corresponding to an activation wavelength of the photoinitiator group and/or the initiators. The flow rate, i.e., residence time of adhesive or pre-adhesive in the reactor 26; intensity of the UV light; and other factors are adjusted to produce a partially or fully polymerized adhesive exiting the reactor 26 via line 32. Polymerization between monomer(s) primarily occurs in the reactor 26. It is contemplated that thermal-based polymerization of monomers could be performed instead of, or in addition to, radiation-based polymerization.

[00131] The adhesive partially or fully polymerized in line 32 may be directly deposited or applied to one or more substrates on a moving web 42 (typically driven by rotating roller 40) via line 34, or directed via line 36 to a storage unit 44 for additional processing and/or subsequent application.

[00132] Upon deposition of the adhesive shown in Figure 1 as regions 46, the adhesive typically on the moving web 42, is irradiated by another UV emitter in a stage 50 that directs UV rays 51 upon the regions 46 to crosslink the adhesive. Crosslinked adhesive 52 results.

Articles

[00133] The present subject matter provides a wide array of articles that include the noted compositions, pre-adhesives, and/or adhesives. Examples of such articles include adhesive tapes including double sided and single sided tapes; label stock; label constructions; packaging products and assemblies including food packages, packaging for household goods and industrial goods and particularly reclosable packages; and other items.

[00134] Figure 2 illustrates a tape article 100 in accordance with an embodiment of the present subject matter. The tape article 100 is shown in a roll form, however, it will be appreciated that the tape could be in a flat, sheet, or Z-fold form. The tape article 100 generally includes a substrate 110

defining a first face 112 and an oppositely directed second face 114. The tape 100 includes a layer or region of an adhesive as described herein disposed on one or both faces 112, 114. One or more release liners and/or low surface energy coatings can be used as described in greater detail herein.

[00135] Figure 3 is a schematic cross sectional view of a tape 100A comprising a substrate 110 defining a first face 112 and an oppositely directed second face 114. The tape 100A also comprises a layer or region of an adhesive 120 disposed on one of the faces such as for example face 114. One or more low surface energy coatings can be disposed on the face 112 of the substrate 110.

[00136] Figure 4 is a schematic cross sectional view of a tape 100B comprising a substrate 110 defining a first face 112 and an oppositely directed second face 114. The tape 100B also comprises a layer or region of an adhesive 120 disposed on one of the faces such as for example face 114. The tape 100B also comprises a release liner 130 covering the adhesive 120. One or more low surface energy coatings can be disposed on the face 112 of the substrate 110.

[00137] Figure 5 is a schematic cross sectional view of a tape 100C comprising a substrate 110 defining a first face 112 and an oppositely directed second face 114. The tape 100C also comprises a first layer or region of an adhesive 120 disposed on one of the faces such as for example face 114. The tape 100C also comprises a second layer or region of an adhesive 125 disposed on the face 112 of the substrate 110.

[00138] Figure 6 is a schematic cross sectional view of a tape 100D comprising a substrate 110 defining a first face 112 and an oppositely directed second face 114. The tape 100D also comprises a first layer or region of an adhesive 120 disposed on one of the faces such as for example face 114. The tape 100D also comprises a second layer or region of an adhesive 125 on the face 112. The tape 100D also comprises a first release liner 130 covering the adhesive 120. And, the tape 100D additionally comprises a second release liner 135 covering the adhesive 125.

[00139] Figure 7 is a schematic cross sectional view of a sealing, closure, or reclosure assembly 200 in accordance with the present subject matter. This assembly comprises a first substrate 210 defining a first substrate face 212, a second substrate 230 defining a second substrate face 214, and one or more layers or regions of an adhesive 220 defining an adhesive face 222. The adhesive 220 is disposed on one or both substrate faces 212, 214. The adhesive 220 serves to seal and/or adhere the substrates 210, 230 together upon contact between the adhesive face 222 and the substrate face 212. As will be understood, the adhesive 220 is any of the adhesives described herein. The assembly 200 can be utilized in association with and/or incorporated in a wide array of packaging products including for

example food packages, packages for household goods, industrial goods packages, and in particular recloseable packages.

[00140] The adhesive layer may have a thickness as desired for a particular purpose or intended use. In one embodiment, the adhesive layer may have a thickness from about 10 to about 125, or from about 10 to about 75, or from about 10 to about 50 microns. In one embodiment, the coat weight of the adhesive may be in the range of about 10 to about 50 grams per square meter (gsm), and in one embodiment about 20 to about 35 gsm.

[00141] Release liners for use in the present subject matter may be those known in the art or those later discovered. In general, suitable release liners include, but are not limited to, polyethylene coated papers with a commercial silicone release coating, polyethylene coated polyethylene terephthalate films with a commercial silicone release coating, or cast polypropylene films that can be embossed with a pattern or patterns while making such films, and thereafter coated with a commercial silicone release coating. An exemplary release liner is kraft paper which has a coating of low density polyethylene on the front side with a silicone release coating and a coating of high density polyethylene or polypropylene on the back side. Other release liners known in the art are also suitable as long as they are selected for their release characteristics relative to the pressure sensitive adhesive chosen for use in the adhesive article, that is, the adhesive will have a greater affinity for the face stock than the liner.

[00142] As previously noted, one or more low surface energy coatings can be used in the articles utilizing the adhesives described herein. For example, for rolled tape products it may be desirable to provide a coating of a low surface energy agent along a rear face of a substrate or tape component that contacts the adhesive. Nonlimiting examples of low surface energy coatings include silicone agents, polypropylene or other polyolefins, certain fluorocarbons, and certain fatty acid esters.

[00143] A benefit of particular adhesives of the present subject matter involves maintenance of performance criteria upon continued exposure to UV radiation. For example, a disadvantage of many conventional UV cured, randomly crosslinked adhesive networks is that additional UV exposure results in additional crosslinking. This may in turn result in undesirable changes in the adhesive and/or its performance. Specifically, this may be undesirable for clear or transparent labels that are UV printed downstream. In contrast, many embodiments of the present subject matter adhesives do not exhibit performance changes upon additional UV exposure.

EXAMPLES

[00144] The following test methods were used for evaluating the adhesive properties of various acrylic adhesives.

Table 2 – PSA Performance Test Methods

Test 90° Peel 20 minute dwell 24 hour dwell 1 week dwell 1 month	Condition a, b, c, d
% Insoluble Polymer	e
Melt Flow	f

(a) Peel, sample applied to a polyethylene terephthalate (PET) panel with a 5 pound roller with 5 passes in each direction. Samples conditioned and tested at 23°C.

(b) Peel, sample applied to a polyethylene terephthalate (PET) film applied to a rigid PVC panel with double sided tape with a 5 pound roller with 5 passes in each direction. Samples conditioned and tested at 23° C.

(c) Peel, sample applied to a high density polyethylene with a 5 pound roller with 5 passes in each direction. Samples conditioned and tested at 23°C.

(d) Peel, sample applied to a high density polypropylene with a 5 pound roller with 5 passes in each direction. Samples conditioned and tested at 23°C.

(e) % Insoluble polymer: 0.05-0.10 grams of cured polymer is sealed in a 5 micrometer porous PTFE membrane filter and tumbled in tetrahydrofuran (THF) for 1 week. The weight of polymer before soak and after soak is measured to achieve a % of polymer that was insoluble in the THF.

(f) Melt flow was measured with an AR2000 Rheometer fitted with a stainless steel 2° cone and plate. Examples were evaluated at 0.25 sec⁻¹ and a gap of 100 micrometer. Temperature was ramped at 0.5°C per minute after a ten minute equilibration time at the starting temperature.

[00145] The present subject matter is further described by reference to the following non-limiting examples.

Example 1: Preparation of Segmented Acrylic Polymer Having Benzophenone Functionality Using SFRP Agent (KH9-76 - 2 PER CHAIN)

[00146] An acrylic copolymer with reactive functionalities positioned in the segment adjacent to the polymer chain end is prepared as follows. Into a 1500ml reactor equipped with a heating jacket, agitator, reflux condenser, feed tanks and nitrogen gas inlet there is charged 4.36g of BlocBuilder MA (SFRP Agent). The reactor is then inerted with nitrogen for 1 hour at 0.5 litre/min. Monomers and solvents are added in the following amounts to a feed vessel and inerted with nitrogen for 1 hour at 0.5 litre/min. After inertion, the monomer and solvent mix was added to the reactor to generate the segment adjacent to the polymer chain ends.

55.92g Butyl Acrylate

55.92g 2-Ethyl Hexyl Acrylate

1.13g Acrylic Acid

6.00g 4-Methacrylic Benzophenone

110.50g Propyl Acetate

[00147] The reactor charge is heated to reflux conditions (reactor jacket 125°C) with a constant nitrogen purge. At 100°C, a 60 minute hold is started in which the reaction will reach a reflux during this hold at approximately 112°C. This is to create the UV functional segment with a theoretical Mn of 10,408 g/mol. During the 60 minute hold, a reagent feed mixture with an active nitrogen purge of 181.47g propyl acetate, 503.31g butyl acrylate, 503.31g 2-ethylhexyl acrylate and 10.17g acrylic acid is weighed into a feed vessel and inerted with nitrogen at 0.5 litre/minute. After the initial 60 minute hold, the reagent feed is added over a period of sixty minutes to the reactor at a rate of 2 grams/minute. After the sixty minute feed, the rate is ramped to 5.99 grams/min until the mixture is depleted. During the reagent feeds the temperature of the reaction is held at 118-122°C. The reaction conditions are maintained after completion of the reagent feed until a conversion of at least 97% of butyl acrylate and 2-ethylhexyl acrylate is achieved. This is to create the remainder of the non-UV functional segment adjacent to the UV functional segment at the end of the polymer. The total theoretical Mn of the non-UV functional segment is 89,591 g/mol. At this time, the polymer is cooled to 85°C. Once the polymer is below 90°C, 11.43g of butyl acrylate is added to the reactor and allowed to mix for 15 minutes. Once the polymer is 85°C, 5.67g of tertiary amyl peroxy pivalate and 50.80g propyl acetate are mixed in a 100 mL feed vessel and inerted for 15 minutes with nitrogen at 0.5 litre/minute. After inertion, the pivalate solution is added to the reactor over ninety minutes. At the completion of the pivalate feed, the reaction temperature is held between 85°C and 90°C for 2 hours. At the end of the 2 hour hold, 34.50g of Foral

85LB pre-dissolved in 14.78g ethyl acetate is added to the polymer. The resulting solution polymer is then cooled to ambient temperature and discharged from the reactor.

Example 2: Preparation of Segmented Acrylic Polymer Having Benzophenone Functionality Using SFRP Agent (KH9-68 - 4 PER CHAIN)

[00148] An acrylic copolymer with reactive functionalities positioned in the segment adjacent to the polymer chain end is prepared as follows. Into a 1500ml reactor equipped with a heating jacket, agitator, reflux condenser, feed tanks and nitrogen gas inlet there is charged 4.34g of BlocBuilder MA (SFRP Agent). The reactor is then inerted with nitrogen for 1 hour at 0.5 litre/min. Monomers and solvents are added in the following amounts to a feed vessel and inerted with nitrogen for 1 hour at 0.5 litre/min. After inertion, the monomer and solvent mix was added to the reactor to generate the segment adjacent to the polymer chain ends.

55.70g Butyl Acrylate

55.70g 2-Ethyl Hexyl Acrylate

1.13g Acrylic Acid

11.95g 4-Methacrylic Benzophenone

110.06g Propyl Acetate

[00149] The reactor charge is heated to reflux conditions (reactor jacket 125°C) with a constant nitrogen purge. At 100°C, a 60 minute hold is started in which the reaction will reach a reflux during this hold at approximately 112°C. This is to create the UV functional segment with a theoretical Mn of 10,933 g/mol. During the 60 minute hold, a reagent feed mixture with an active nitrogen purge of 180.74g propyl acetate, 501.29g butyl acrylate, 501.29g 2-ethylhexyl acrylate and 10.13g acrylic acid is weighed into a feed vessel and inerted with nitrogen at 0.5 litre/minute. After the initial 60 minute hold, the reagent feed is added over a period of sixty minutes to the reactor at a rate of 2 grams/minute. After the sixty minute feed, the rate is ramped to 5.96 grams/min until the mixture is depleted. During the reagent feeds the temperature of the reaction is held at 118-122°C. The reaction conditions are maintained after completion of the reagent feed until a conversion of at least 97% of butyl acrylate and 2-ethylhexyl acrylate is achieved. This is to create the remainder of the non-UV functional segment adjacent to the UV functional segment at the end of the polymer. The total theoretical Mn of the non-UV functional segment is 89,066 g/mol. At this time, the polymer is cooled to 85°C. Once the polymer is below 90°C, 11.39g of butyl acrylate is added to the reactor and allowed to mix for 15 minutes. Once the polymer is 85°C, 5.68g of tertiary amyl peroxy pivalate and 50.60g propyl acetate are mixed in a 100

mL feed vessel and inerted for 15 minutes with nitrogen at 0.5 litre/minute. After inertion, the pivalate solution is added to the reactor over ninety minutes. At the completion of the pivalate feed, the reaction temperature is held between 85°C and 90°C for 2 hours. At the end of the 2 hour hold, 35.54g of Foral 85LB pre-dissolved in 15.23g ethyl acetate is added to the polymer. The resulting solution polymer is then cooled to ambient temperature and discharged from the reactor.

Example 3: Preparation of Segmented Acrylic Polymer Having Benzophenone Functionality Using SFRP Agent (KH9-75 – 2.6 PER CHAIN)

[00150] An acrylic copolymer with reactive functionalities positioned in the segment adjacent to the polymer chain end is prepared as follows. Into a 1500ml reactor equipped with a heating jacket, agitator, reflux condenser, feed tanks and nitrogen gas inlet there is charged 4.35g of BlocBuilder MA (SFRP Agent). The reactor is then inerted with nitrogen for 1 hour at 0.5 litre/min. Monomers and solvents are added in the following amounts to a feed vessel and inerted with nitrogen for 1 hour at 0.5 litre/min. After inertion, the monomer and solvent mix was added to the reactor to generate the segment adjacent to the polymer chain ends.

55.85g Butyl Acrylate

55.85g 2-Ethyl Hexyl Acrylate

1.13g Acrylic Acid

7.99g 4-Methacrylic Benzophenone

110.35g Propyl Acetate

[00151] The reactor charge is heated to reflux conditions (reactor jacket 125°C) with a constant nitrogen purge. At 100°C, a 60 minute hold is started in which the reaction will reach a reflux during this hold at approximately 112°C. This is to create the UV functional segment with a theoretical Mn of 10,408 g/mol. During the 60 minute hold, a reagent feed mixture with an active nitrogen purge of 181.23g propyl acetate, 502.64g butyl acrylate, 502.64g 2-ethylhexyl acrylate and 10.15g acrylic acid is weighed into a feed vessel and inerted with nitrogen at 0.5 litre/minute. After the initial 60 minute hold, the reagent feed is added over a period of sixty minutes to the reactor at a rate of 2 grams/minute. After the sixty minute feed, the rate is ramped to 5.98 grams/min until the mixture is depleted. During the reagent feeds the temperature of the reaction is held at 118-122°C. The reaction conditions are maintained after completion of the reagent feed until a conversion of at least 97% of butyl acrylate and 2-ethylhexyl acrylate is achieved. This is to create the remainder of the non-UV functional segment adjacent to the UV functional segment at the end of the polymer. The total theoretical Mn of the non-

UV functional segment is 89,591 g/mol. At this time, the polymer is cooled to 85°C. Once the polymer is below 90°C, 11.42g of butyl acrylate is added to the reactor and allowed to mix for 15 minutes. Once the polymer is 85°C, 5.68g of tertiary amyl peroxy pivalate and 50.74g propyl acetate are mixed in a 100 mL feed vessel and inerted for 15 minutes with nitrogen at 0.5 litre/minute. After inertion, the pivalate solution is added to the reactor over ninety minutes. At the completion of the pivalate feed, the reaction temperature is held between 85°C and 90°C for 2 hours. The resulting solution polymer is then cooled to ambient temperature and discharged from the reactor.

Example 4: Preparation of Segmented Acrylic Polymer Having Benzophenone Functionality Using SFRP Agent (KH9-21 – 1.3 PER CHAIN)

[00152] An acrylic copolymer with reactive functionalities positioned in the segment adjacent to the polymer chain end is prepared as follows. Into a 1500ml reactor equipped with a heating jacket, agitator, reflux condenser, feed tanks and nitrogen gas inlet there is charged 3.63g of BlocBuilder MA (SFRP Agent). The reactor is then inerted with nitrogen for 1 hour at 0.5 litre/min. Monomers and solvents are added in the following amounts to a feed vessel and inerted with nitrogen for 1 hour at 0.5 litre/min. After inertion, the monomer and solvent mix was added to the reactor to generate the segment adjacent to the polymer chain ends.

46.67g Butyl Acrylate

46.67g 2-Ethyl Hexyl Acrylate

0.94g Acrylic Acid

3.34g 4-Methacrylic Benzophenone

92.21g Propyl Acetate

[00153] The reactor charge is heated to reflux conditions (reactor jacket 125°C) with a constant nitrogen purge. At 100°C, a 60 minute hold is started in which the reaction will reach a reflux during this hold at approximately 112°C. This is to create the UV functional segment with a theoretical Mn of 10,408 g/mol. During the 60 minute hold, a reagent feed mixture with an active nitrogen purge of 151.43g propyl acetate, 419.99g butyl acrylate, 419.99g 2-ethylhexyl acrylate and 8.48g acrylic acid is weighed into a feed vessel and inerted with nitrogen at 0.5 litre/minute. After the initial 60 minute hold, the reagent feed is added over a period of sixty minutes to the reactor at a rate of 2 grams/minute. After the sixty minute feed, the rate is ramped to 4.89 grams/min until the mixture is depleted. During the reagent feeds the temperature of the reaction is held at 118-122°C. The reaction conditions are maintained after completion of the reagent feed until a conversion of at least 97% of butyl acrylate and

2-ethylhexyl acrylate is achieved. This is to create the remainder of the non-UV functional segment adjacent to the UV functional segment at the end of the polymer. The total theoretical Mn of the non-UV functional segment is 89,591 g/mol. At this time, the polymer is cooled to 85°C. Once the polymer is below 90°C, 9.54g of butyl acrylate is added to the reactor and allowed to mix for 15 minutes. Once the polymer is 85°C, 4.73g of tertiary amyl peroxy pivalate and 42.39g propyl acetate are mixed in a 100 mL feed vessel and inerted for 15 minutes with nitrogen at 0.5 litre/minute. After inertion, the pivalate solution is added to the reactor over ninety minutes. At the completion of the pivalate feed, the reaction temperature is held between 85°C and 90°C for 2 hours. The resulting solution polymer is then cooled to ambient temperature and discharged from the reactor.

Example 5: Preparation of Segmented Acrylic Polymer Having Benzophenone Functionality Using SFRP Agent (KH9-77 – 1.65 PER CHAIN))

[00154] An acrylic copolymer with reactive functionalities positioned in the segment adjacent to the polymer chain end is prepared as follows. Into a 1500ml reactor equipped with a heating jacket, agitator, reflux condenser, feed tanks and nitrogen gas inlet there is charged 4.36g of BlocBuilder MA (SFRP Agent). The reactor is then inerted with nitrogen for 1 hour at 0.5 litre/min. Monomers and solvents are added in the following amounts to a feed vessel and inerted with nitrogen for 1 hour at 0.5 litre/min. After inertion, the monomer and solvent mix was added to the reactor to generate the segment adjacent to the polymer chain ends.

55.96g Butyl Acrylate

55.96g 2-Ethyl Hexyl Acrylate

1.13g Acrylic Acid

5.00g 4-Methacrylic Benzophenone

110.57g Propyl Acetate

[00155] The reactor charge is heated to reflux conditions (reactor jacket 125°C) with a constant nitrogen purge. At 100°C, a 60 minute hold is started in which the reaction will reach a reflux during this hold at approximately 112°C. This is to create the UV functional segment with a theoretical Mn of 10,408 g/mol. During the 60 minute hold, a reagent feed mixture with an active nitrogen purge of 181.59g propyl acetate, 503.65g butyl acrylate, 503.65g 2-ethylhexyl acrylate and 10.17g acrylic acid is weighed into a feed vessel and inerted with nitrogen at 0.5 litre/minute. After the initial 60 minute hold, the reagent feed is added over a period of sixty minutes to the reactor at a rate of 2 grams/minute. After the sixty minute feed, the rate is ramped to 5.99 grams/min until the mixture is depleted. During the

reagent feeds the temperature of the reaction is held at 118-122°C. The reaction conditions are maintained after completion of the reagent feed until a conversion of at least 97% of butyl acrylate and 2-ethylhexyl acrylate is achieved. This is to create the remainder of the non-UV functional segment adjacent to the UV functional segment at the end of the polymer. The total theoretical Mn of the non-UV functional segment is 89,591 g/mol. At this time, the polymer is cooled to 85°C. Once the polymer is below 90°C, 11.44g of butyl acrylate is added to the reactor and allowed to mix for 15 minutes. Once the polymer is 85°C, 5.67g of tertiary amyl peroxy pivalate and 50.84g propyl acetate are mixed in a 100 mL feed vessel and inerted for 15 minutes with nitrogen at 0.5 litre/minute. After inertion, the pivalate solution is added to the reactor over ninety minutes. At the completion of the pivalate feed, the reaction temperature is held between 85°C and 90°C for 2 hours. At the end of the 2 hour hold, 32.52g of Foral 85LB pre-dissolved in 13.94g ethyl acetate is added to the polymer. The resulting solution polymer is then cooled to ambient temperature and discharged from the reactor.

Example 6: Preparation of Segmented Acrylic Polymer Having Benzophenone Functionality Using SFRP Agent (KH9-81 – 2.3 PER CHAIN)

[00156] An acrylic copolymer with reactive functionalities positioned in the segment adjacent to the polymer chain end is prepared as follows. Into a 1500ml equipped with a heating jacket, agitator, reflux condenser, feed tanks and nitrogen gas inlet there is charged 4.35g of BlocBuilder MA (SFRP Agent). The reactor is then inerted with nitrogen for 1 hour at 0.5 litre/min. Monomers and solvents are added in the following amounts to a feed vessel and inerted with nitrogen for 1 hour at 0.5 litre/min. After inertion, the monomer and solvent mix was added to the reactor to generate the segment adjacent to the polymer chain ends.

55.89g Butyl Acrylate

55.89g 2-Ethyl Hexyl Acrylate

1.13g Acrylic Acid

7.00g 4-Methacrylic Benzophenone

110.43g Propyl Acetate

[00157] The reactor charge is heated to reflux conditions (reactor jacket 125°C) with a constant nitrogen purge. At 100°C, a 60 minute hold is started in which the reaction will reach a reflux during this hold at approximately 112°C. This is to create the UV functional segment with a theoretical Mn of 10,408 g/mol. During the 60 minute hold, a reagent feed mixture with an active nitrogen purge of 181.35g propyl acetate, 502.97g butyl acrylate, 502.97g 2-ethylhexyl acrylate and 10.16g acrylic acid is

weighed into a feed vessel and inerted with nitrogen at 0.5 litre/minute. After the initial 60 minute hold, the reagent feed is added over a period of sixty minutes to the reactor at a rate of 2 grams/minute. After the sixty minute feed, the rate is ramped to 5.99 grams/min until the mixture is depleted. During the reagent feeds the temperature of the reaction is held at 118-122°C. The reaction conditions are maintained after completion of the reagent feed until a conversion of at least 97% of butyl acrylate and 2-ethylhexyl acrylate is achieved. This is to create the remainder of the non-UV functional segment adjacent to the UV functional segment at the end of the polymer. The total theoretical Mn of the non-UV functional segment is 89,591 g/mol. At this time, the polymer is cooled to 85°C. Once the polymer is below 90°C, 11.42g of butyl acrylate is added to the reactor and allowed to mix for 15 minutes. Once the polymer is 85°C, 5.67g of tertiary amyl peroxy pivalate and 50.77g propyl acetate are mixed in a 100 mL feed vessel and inerted for 15 minutes with nitrogen at 0.5 litre/minute. After inertion, the pivalate solution is added to the reactor over ninety minutes. At the completion of the pivalate feed, the reaction temperature is held between 85°C and 90°C for 2 hours. At the end of the 2 hour hold, 35.61g of Foral 85LB pre-dissolved in 15.26g ethyl acetate is added to the polymer. The resulting solution polymer is then cooled to ambient temperature and discharged from the reactor.

Example 7: Formulation of Example 3 (AK9-97)

[00158] Three percent Foral 85LB was added to the polymer of Example 3 based on solid content to result in a 97:3 ratio polymer to tackifier.

Example 8: Formulation of Example 4 (AK9-65)

[00159] Three percent Foral 85LB was added to the polymer of Example 4 based on solid content to result in a 97:3 ratio polymer to tackifier.

Example 9: Comparative Example from Commercial Supplier

[00160] This adhesive is a formulated high molecular weight solvent acrylic polymer.

Example 10: Comparative Example from Commercial Supplier

[00161] This adhesive is a formulated high molecular weight solvent acrylic polymer.

[00162] Table 3 summarizes Examples 1-10.

Table 3 – Summary of Examples 1-10

Example	1	2	3	4	5	6	7	8	9	10
Lot	76	68	75	21	77	81	AK9-97	AK9-65	Commercial Control	Commercial Control
#bp/ch	2	4	2.6	1.3	1.65	2.3	97% Ex. 3	97% Ex. 4		
Solids	76.92%	77.01%	77.18%	77.12%	76.92%	77.09%			-	-
BA	49.74%	49.49%	49.66%	49.83%	49.79%	49.70%				
EHA	48.75%	48.49%	48.66%	48.83%	48.79%	48.71%				
AA	0.99%	0.98%	0.98%	0.99%	0.99%	0.98%				
4MABP	0.52%	1.04%	0.70%	0.35%	0.44%	0.61%				
Total	100.00 %	100.00 %	100.00 %	100.00%	100.00%	100.00%				
Parts Foral	2.89%	2.89%	0.00%	0.00%	2.73%	3.19%	3.00%	3.00%	0.00%	0.00%
Mn (g/mol)	55223	59709	See Ex. 7	See Ex. 8	52849	55130	56388	44202	112718	302632
Mw (g/mol)	186276	194747			169349	182701	197077	191279	463059	929513
PDI	3.37	3.26			3.20	3.31	3.50	4.33	4.11	3.07

Test Results

[00163] The adhesives of Examples 1, 2, 5, 6, 7, and 8 were coated onto 2-mil polyethylene terephthalate with a 100% solids platinum cured silicone release layer at 10-12 grams per square meter (gsm) and dried at ambient temperature for 15 minutes followed by 50°C for 15 minutes to isolate the formulation from solvent. After drying, the coating was cured with UV radiation at various energy densities to achieve various cure levels. The cured coating was then laminated to a 2 mil BOPP film and dwelled in a 50°C oven for 24 hours followed by a 24 hour dwell in a climate controlled room at 75°F and 50% humidity before testing.

[00164] The Comparative Examples 9 and 10 were obtained from Avery Dennison.

[00165] Figures 10 and 11 present results of evaluations of samples from various examples.

[00166] Tables 4-7 present results of evaluations and compare 90° peel adhesion trials of samples from Examples 1, 9, and 10.

Table 4 – Comparing Examples 1, 9, and 10

	Coatweight (gsm)	90° Peel adhesion to Rigid PET panel (pli)			
		20 min	24 hr	1 week	1 month
Example 1 cured @ 5 mJ/cm ² UV-C	12.5	1.32	1.36	1.43	1.45
Example 1 cured @ 9 mJ/cm ² UV-C	10.0	0.93	0.90	0.96	1.02
Comparative Example 9	17.5	1.17	1.23	1.32	1.28
Comparative Example 10	17.5	1.16	1.23	1.30	1.29

Table 5 – Comparing Examples 1, 9, and 10

	Coatweight (gsm)	90° Peel adhesion to Flexible PET film (pli)			
		20 min	24 hr	1 week	1 month
Example 1 cured @ 5 mJ/cm ² UV-C	12.5	0.98	n/a	1.14	n/a
Example 1 cured @ 9 mJ/cm ² UV-C	10.0	0.63	n/a	0.81	n/a
Comparative Example 9	17.5	0.88	n/a	0.98	n/a
Comparative Example 10	17.5	0.74	n/a	0.99	n/a

Table 6 – Comparing Examples 1, 9, and 10

	Coatweight (gsm)	90° Peel adhesion to Rigid PP panel (pli)			
		20 min	24 hr	1 week	1 month
Example 1 cured @ 5 mJ/cm ² UV-C	12.5	0.79	0.80	0.84	0.80
Example 1 cured @ 9 mJ/cm ² UV-C	10.0	0.60	0.59	0.63	0.67
Comparative Example 9	17.5	0.71	0.74	0.78	0.67
Comparative Example 10	17.5	0.60	0.61	0.63	0.64

Table 7 – Comparing Examples 1, 9, and 10

	Coatweight (gsm)	90° Peel adhesion to Rigid HDPE panel (pli)			
		20 min	24 hr	1 week	1 month
Example 1 cured @ 5 mJ/cm ² UV-C	12.5	0.53	0.55	0.59	0.55
Example 1 cured @ 9 mJ/cm ² UV-C	10.0	0.34	0.36	0.40	0.42
Comparative Example 9	17.5	0.30	0.34	0.35	0.41
Comparative Example 10	17.5	0.21	0.25	0.23	0.29

[00167] Figures 12 and 13 present results of melt flow evaluations of samples of Examples 1 and 6.

Example #11: Preparation of Segmented Acrylic Polymer Having Benzophenone Functionality Using SFRP Agent (KH8-15 – Pseudo Telechelic → 2.5 per chain end)

[00168] An acrylic copolymer with reactive functionalities positioned in the segment adjacent to the polymer chain ends is prepared as follows. Into a 1500ml reactor equipped with a heating jacket, agitator, reflux condenser, feed tanks and nitrogen gas inlet there is charged 2.89g of BlocBuilder MA (SFRP Agent). The reactor is then inerted with nitrogen for 1 hour at 0.5 litre/min.

Monomers and solvents are added in the following amounts to a feed vessel and inerted with nitrogen for 1 hour at 0.5 litre/min. After inertion, the monomer and solvent mix was added to the reactor to generate the segment adjacent to the polymer chain ends.

74.62g Butyl Acrylate

6.65g 4-Methacrylic Benzophenone

73.42g Propyl Acetate

[00169] The reactor charge is heated to reflux conditions (reactor jacket 125°C) with a constant nitrogen purge. At 100°C, a 60 minute hold is started in which the reaction will reach a reflux during this hold at approximately 112°C. This is to create the UV functional segment with a theoretical Mn of 10,700 g/mol. During the 60 minute hold, a reagent feed mixture with an active nitrogen purge of 84.39g propyl acetate and 671.62g butyl acrylate is weighed into a feed vessel and inerted with nitrogen at 0.5 litre/minute. After the initial 60 minute hold, the reagent feed is added over a period of sixty minutes to the reactor at a rate of 2 grams/minute. After the sixty minute feed, the rate is ramped to 4.41 grams/min until the mixture is oxygen depleted. During the reagent feeds the temperature of the reaction is held at 118-122°C. The reaction conditions are maintained after completion of the reagent feed until a conversion of at least 90% of butyl acrylate is achieved. Conversion for this example was 92.3%. This is to create the remainder of the non-UV functional segment adjacent to the UV functional segment at the end of the polymer. The total theoretical Mn of the non-UV functional segment is 88,425 g/mol. Prior to the 92.3% BA conversion, 6.65g of 4-Methacrylic Benzophenone, 74.62g of Butyl Acrylate, and 42.00g of Propyl Acetate are weighed into a feed vessel and inerted with nitrogen at 0.5 litre/min until the mixture is oxygen depleted. After sparging, the reagent feed is added to the reactor at the 92.3% BA conversion at the max feed rate of ~ g/min. The reaction is held at 118-122°C until the BA conversion is >95%. At this time, the polymer is cooled to 85°C. Once the polymer is 85°C, 3.80g of tertiary amyl peroxy pivalate and 33.76g propyl acetate are mixed in a 100 mL feed vessel and inerted for 15 minutes with nitrogen at 0.5 litre/minute. After inertion, the pivalate solution is added to the reactor over ninety minutes. At the completion of the pivalate feed, the reaction temperature is held between 85°C and 90°C for 2 hours. The resulting solution polymer is then cooled to ambient temperature and discharged from the reactor. The theoretical molecular weight was 109,825 g/mol Mn and the actual measured to be 42,601 g/mol Mn, 206,800 g/mol Mw, and 4.85 PDI.

Table 7 – Testing Results for Example #11

	Coatweight (gsm)	90° Peel adhesion to Flexible PET film (pli)			
		20 min	24 hr	1 week	1 month
Example #11 cured @ 12 mJ/cm ² UV-C	12.2	0.64	0.71	n/a	n/a
Example #11 cured @ 24 mJ/cm ² UV-C	12.2	0.41	0.42	n/a	n/a
Example #11 cured @ 36 mJ/cm ² UV-C	12.2	0.29	0.29	n/a	n/a

[00170] Many other benefits will not doubt become apparent from future application and development of this technology.

[00171] Further examples consistent with the present teachings are set out in the following number clauses.

Clause 1. An acrylic polymer comprising:
at least one acrylic block copolymer including
a first reactive segment of controlled molecular weight and position that includes at least one monomer having a functional group selected from the group consisting of a UV active functional group, a reactive functional group, a non-reactive functional group, and combinations thereof; and
a second segment of controlled molecular weight and position that includes at least one monomer having a functional group selected from the group consisting of a reactive functional group, a non-reactive functional group, and combinations thereof.

Clause 2. The acrylic polymer of Clause 1 wherein the first reactive segment includes at least one monomer having a UV active functional group, at least one monomer having a reactive functional group, and at least one monomer having a non-reactive functional group.

Clause 3. The acrylic polymer of Clause 1 or 2 wherein the first reactive segment includes at least one monomer having a UV active functional group and at least one monomer having a non-reactive functional group.

Clause 4. The acrylic polymer of any one of Clauses 1 to 3 wherein the second segment includes at least one monomer having a reactive functional group and at least one monomer having a non-reactive functional group.

Clause 5. The acrylic polymer of any one of Clauses 1 to 4 wherein the second segment includes at least one monomer having a non-reactive functional group.

Clause 6. The acrylic polymer of any one of Clauses 1 to 5 wherein the first reactive segment includes at least one monomer having a non-reactive functional group and at least one polymerizable comonomer having a crosslinkable functionality, the crosslinkable functionality selected from the group consisting of a UV active functional group, a reactive functional group, and combinations thereof.

Clause 7. The acrylic polymer of any one of Clauses 1 to 6 wherein the first reactive segment includes at least one monomer having a non-reactive functional group and at least one polymerizable comonomer having a crosslinkable functionality, the crosslinkable functionality is a UV active functional group.

Clause 8. The acrylic polymer of any one of Clauses 1 to 7 wherein the at least one monomer having a non-reactive functional group within the first reactive segment is the same type of monomer having a non-reactive functional group present in the second reactive segment.

Clause 9. The acrylic polymer of any one of Clauses 1 to 8 wherein the at least one monomer having a reactive functional group within the first reactive segment is the same type of monomer having a reactive functional group present in the second reactive segment.

Clause 10. The acrylic polymer of any one of Clauses 1 to 9 wherein the at least one monomer having a reactive functional group includes at least one monomer derived from the formula (II):




where R is H or CH₃ and X includes a functional group capable of crosslinking,

wherein the functional group includes at least one functional group selected from the group consisting of hydroxyl, carboxyl, carbonyl, carbonate ester, isocyanate, epoxy, vinyl, amine, amide,

imide, anhydride, mercapto (thiol), acid, acrylamide, acetoacetyl groups, alkoxymethylol, cyclic ether groups, and combinations thereof.


Clause 11. The acrylic polymer of any one of Clauses 1 to 10 wherein the at least one monomer having a reactive functional group includes at least one functionalized monomer derived from the formula (I):



where R_3 is H or CH_3 and R_4 is a branched or unbranched, saturated alkyl group having 4 to 14 carbon atoms.

Clause 12. The acrylic polymer of any one of Clauses 1 to 11 wherein the at least one functionalized monomer includes a crosslinkable functional group selected from the group consisting of hydroxyl, carboxyl, carbonyl, carbonate ester, isocyanate, epoxy, vinyl, amine, amide, imide, anhydride, mercapto (thiol), acid, acrylamide, acetoacetyl groups, alkoxymethylol, cyclic ether groups, and combinations thereof.

Clause 13. The acrylic polymer of any one of Clauses 1 to 12 wherein the at least one monomer having a non-reactive functional group includes at least one monomer derived from the formula (I):



where R_3 is H or CH_3 and R_4 is a branched or unbranched, saturated alkyl group having 4 to 14 carbon atoms.

Clause 14. The acrylic polymer of any one of Clauses 1 to 13 wherein the at least one monomer having a non-reactive functional group is derived from C_1 to about C_{20} alkyl, aryl, or cyclic acrylates or C_1 to about C_{20} alkyl, aryl, or cyclic methacrylates.

Clause 15. The acrylic polymer of any one of Clauses 1 to 14 wherein the first reactive segment includes about 40% to about 99% by weight of the at least one monomer having a non-reactive functional group.

Clause 16. The acrylic polymer of any one of Clauses 1 to 15 wherein the at least one monomer having a UV active functional group is about 10% or less by weight of the total polymer weight.

Clause 17. The acrylic polymer of any one of Clauses 1 to 16 wherein the second segment is non-reactive with the UV active functional group and/or the reactive functional group.

Clause 18. The acrylic polymer of any one of Clauses 1 to 17 wherein the at least one monomer having a non-reactive functional group is non-reactive with the UV active functional group and/or the reactive functional group.

Clause 19. The acrylic polymer of any one of Clauses 1 to 18 wherein the first reactive segment and the second segment are positioned adjacent to the polymer chain ends.

Clause 20. The acrylic polymer of any one of Clauses 1 to 19 wherein the reactive functional groups and/or the non-reactive functional groups are randomly spaced apart along the length of the polymer chain.

Clause 21. The acrylic polymer of any one of Clauses 1 to 20 wherein the first reactive segment comprises 40% or less of the total polymer molecular weight.

Clause 22. The acrylic polymer of any one of Clauses 1 to 21 wherein the first reactive segment and the second segment are molecularly miscible before cure.

Clause 23. The acrylic polymer of any one of Clauses 1 to 22 wherein the acrylic polymer is a single phase polymer at room temperature.

Clause 24. The acrylic polymer of any one of Clauses 1 to 23 wherein the acrylic polymer is a single phase polymer prior to crosslinking.

Clause 25. The acrylic polymer of any one of Clauses 1 to 24 wherein the first reactive segment and the second segment are molecularly miscible before cure as expressed by their properties in the bulk state that are indicative of a single phase polymer.

Clause 26. The acrylic polymer of any one of Clauses 1 to 25 wherein the acrylic polymer is a single phase liquid polymer at room temperature.

Clause 27. The acrylic polymer of any one of Clauses 1 to 26 wherein the acrylic polymer is a single phase liquid polymer prior to crosslinking.

Clause 28. The acrylic polymer of any one of Clauses 1 to 27 wherein the acrylic polymer is a liquid polymer at room temperature.

Clause 29. The acrylic polymer of any one of Clauses 1 to 28 wherein the acrylic polymer is a liquid polymer prior to crosslinking.

Clause 30. The acrylic polymer of any one of Clauses 1 to 29 wherein the acrylic polymer is a homogeneous polymer at room temperature.

Clause 31. The acrylic polymer of any one of Clauses 1 to 30 wherein the acrylic polymer is a homogeneous polymer prior to crosslinking.

Clause 32. The acrylic polymer of any one of Clauses 1 to 31 wherein the acrylic polymer is a homogeneous liquid polymer prior to crosslinking.

Clause 33. The acrylic polymer of any one of Clauses 1 to 32 wherein the acrylic polymer is a homogeneous liquid polymer at room temperature.

Clause 34. The acrylic polymer of any one of Clauses 1 to 33 wherein the acrylic polymer exhibits no heterogeneity prior to crosslinking.


Clause 35. The acrylic polymer of any one of Clauses 1 to 34 wherein the acrylic polymer exhibits no heterogeneity at room temperature.

Clause 36. The acrylic polymer of any one of Clauses 1 to 35 wherein the glass transition temperature (T_g) of the acrylic polymer is within a range of from about 15° C to about -115° C.

Clause 37. The acrylic polymer of any one of Clauses 1 to 36 wherein the UV active functional group is selected from the group consisting of benzophenones, double bonds, and combinations thereof.

Clause 38. The acrylic polymer of any one of Clauses 1 to 37 wherein the UV active functional group is a benzophenone.

Clause 39. The acrylic polymer of any one of Clauses 1 to 38 wherein the UV active functional group is represented by Formula (III) as follows:



(III)

in which R₁ and R₂ is each independently an organic radical selected from the group consisting of methyl, aryl, and alkyl.

Clause 40. The acrylic polymer of any one of Clauses 1 to 39 wherein R₁ and R₂ is each independently an aromatic or substituted aromatic group.

Clause 41. The acrylic polymer of any one of Clauses 1 to 40 wherein R₁ and R₂ is each independently a phenyl or substituted phenyl group.

Clause 42. The acrylic polymer of any one of Clauses 1 to 41 wherein the UV active functional group is selected from the group consisting of acetophenone, an acetophenone derivative, benzophenone, a benzophenone derivative, anthraquinone, an anthraquinone derivative, benzile, a benzile derivative, thioxanthone, a thioxanthone derivative, xanthone, a xanthone derivative, a benzoin ether, a benzoin ether derivative, an alpha-ketol, an alpha-ketol derivative, and combinations thereof.

Clause 43. The acrylic polymer of any one of Clauses 1 to 42 wherein the reactive functional group is selected from the group consisting of hydroxyl, carboxyl, carbonyl, carbonate ester, isocyanate, epoxy, vinyl, amine, amide, imide, anhydride, mercapto (thiol), acid, acrylamide, acetoacetyl groups, alkoxymethylol, cyclic ether groups, and combinations thereof.

Clause 44. The acrylic polymer of any one of Clauses 1 to 43 wherein the reactive functional group is an acid.

Clause 45. The acrylic polymer of any one of Clauses 1 to 44 wherein the acrylic polymer has a polydispersity greater than 3.0.

Clause 46. The acrylic polymer of any one of Clauses 1 to 45 wherein the acrylic polymer has a number average molecular weight (Mn) within a range of from about 5,000 g/mol to about 150,000 g/mol.

Clause 47. The acrylic polymer of any one of Clauses 1 to 46 comprising two first reactive segments A and one second segment B.

Clause 48. The acrylic polymer of Clause 47 wherein the segments A are positioned on either side of the middle segment B on the polymer chain to define an ABA structure.

Clause 49. The acrylic polymer of any one of Clauses 1 to 46 comprising two second segments B and one first reactive segment A.

Clause 50. The acrylic polymer of Clause 49 wherein the blocks B are positioned on either side of the middle block A on the polymer chain to define a BAB structure.

Clause 51. An acrylic polymer comprising:
at least one acrylic block copolymer including
a first reactive segment of controlled molecular weight and position that includes at least one monomer having a functional group selected from the group consisting of a UV active functional group, a reactive functional group, a non-reactive functional group, and combinations thereof; and
a second segment of controlled molecular weight and position that includes at least one monomer having a functional group selected from the group consisting of a reactive functional group, a non-reactive functional group, and combinations thereof,
wherein the first reactive segment includes at least one monomer having a non-reactive functional group and at least one polymerizable comonomer having a crosslinkable functionality, the crosslinkable functionality selected from the group consisting of a UV active functional group, a reactive functional group, and combinations thereof.

Clause 52. The acrylic polymer of Clause 51 wherein the first reactive segment includes a copolymer derived from one or more of the monomers of the second segment and at least one polymerizable comonomer having a crosslinkable functionality, the crosslinkable functionality selected from the group consisting of a UV active functional group, a reactive functional group, and combinations thereof.

Clause 53. The acrylic polymer of Clauses 51 or 52 wherein the at least one monomer having a non-reactive functional group within the first reactive segment is the same type of monomer having a non-reactive functional group present in the second reactive segment.

Clause 54. The acrylic polymer of any one of Clauses 51 to 53 wherein the acrylic polymer is a homogeneous polymer prior to crosslinking.

Clause 55. The acrylic polymer of any one of Clauses 51 to 54 wherein the first reactive segment comprises 40% or less of the total polymer molecular weight.

Clause 56. The acrylic polymer of any one of Clauses 51 to 55 wherein the at least one monomer having a UV active functional group is about 10% or less by weight of the total polymer weight.

Clause 57. The acrylic polymer of any one of Clauses 51 to 56 wherein the first reactive segment includes about 40% to about 99% by weight of the at least one monomer having a non-reactive functional group.

Clause 58. A pressure sensitive adhesive composition comprising:
the acrylic polymer of any one of Clauses 1 to 50 or Clauses 51 to 57; and
a crosslinking agent.

Clause 59. The adhesive composition of Clause 58 wherein the crosslinking agent is from about 0.05% to about 5% by weight of adhesive solids.

Clause 60. The adhesive composition of Clauses 58 or 59 wherein the crosslinking agent is activated using one of heat, actinic radiation, electron beam radiation, and a metal based catalyst.

Clause 61. The adhesive composition of any one of Clauses 58 to 60 wherein the adhesive composition further comprises at least one agent selected from the group consisting of tackifiers, plasticizers, antioxidants, pH controllers, medicaments, bactericides, growth factors, wound healing components, deodorants, perfumes, antimicrobials, fungicides, cutting agents, pigments, filler, diluents, flame retardants, and combinations thereof.

Clause 62. The adhesive composition of any one of Clauses 58 to 61 wherein the weight percentage of solids is greater than 50%.

Clause 63. The adhesive composition of any one of Clauses 58 to 62 wherein the adhesive exhibits an elastic/storage modulus (G') of less than the Dahlquist criterion value of 3×10^6 dynes/cm² (3×10^5 Pa) at room temperature.

Clause 64. The adhesive composition of any one of Clauses 58 to 63 wherein the glass transition temperature (T_g) of the adhesive composition is within a range of from about 15° C to about -115° C.

Clause 65. A method of preparing a pressure sensitive adhesive composition comprising:
polymerizing using a controlled radical polymerization process at least one monomer having a functional group selected from the group consisting of a UV active functional group, a reactive functional group, a non-reactive functional group, and combinations thereof to thereby form a first reactive segment of controlled molecular weight and position;

polymerizing using a controlled radical polymerization process at least one monomer having a functional group selected from the group consisting of a reactive functional group, a non-reactive functional group, and combinations thereof to thereby form a second segment of controlled molecular weight and position;

forming an acrylic polymer from the first reactive segment and the second segment; and
crosslinking the acrylic polymer by mixing the acrylic polymer with an amount of a crosslinking agent.

Clause 66. The method of Clause 65 wherein at least one of the first reactive segment and the second segment is polymerized in the presence of a RAFT agent.

Clause 67. The method of Clause 65 or 66 wherein at least one of the first reactive segment and the second segment is polymerized in the presence of an SFRP agent.

Clause 68. An adhesive article comprising:
a substrate; and
the adhesive of any one of Clauses 58 to 64 disposed on the substrate.

Clause 69. The adhesive article of Clause 68 wherein the article is in the form of a tape.

Clause 70. An acrylic polymer consisting of:
at least one acrylic block copolymer having

a first reactive segment of controlled molecular weight and position consisting of at least one monomer having a UV active functional group, at least one monomer having a reactive functional group, and at least one monomer having a non-reactive functional group; and

a second segment of controlled molecular weight and position consisting of at least one monomer having a reactive functional group, and at least one monomer having a non-reactive functional group.

Clause 71. The acrylic polymer of Clause 70 wherein the first reactive segment consists of at least one monomer having a non-reactive functional group and at least one polymerizable comonomer having a crosslinkable functionality, the crosslinkable functionality consisting of a UV active functional group and a reactive functional group.

Clause 72. The acrylic polymer of Clauses 70 or 71 wherein the first reactive segment consists of a copolymer derived from one or more of the monomers of the second segment and at least one polymerizable comonomer having a crosslinkable functionality, the crosslinkable functionality consisting of a UV active functional group and a reactive functional group.

Clause 73. The acrylic polymer of any one of Clauses 70 to 72 wherein the at least one monomer having a non-reactive functional group within the first reactive segment is the same type of monomer having a non-reactive functional group present in the second reactive segment.

Clause 74. The acrylic polymer of any one of Clauses 70 to 73 wherein the acrylic polymer is a homogeneous polymer prior to crosslinking.

Clause 75. The acrylic polymer of any one of Clauses 70 to 74 wherein the first reactive segment is about 40% or less of the total polymer molecular weight.

Clause 76. The acrylic polymer of any one of Clauses 70 to 75 wherein the at least one monomer having a UV active functional group is about 10% or less by weight of the total polymer weight.

Clause 77. The acrylic polymer of any one of Clauses 70 to 76 wherein the first reactive segment includes about 40% to about 99% by weight of the at least one monomer having a non-reactive functional group.

Clause 78. A pressure sensitive adhesive composition consisting of:
the acrylic polymer of any one of Clauses 70 to 77; and
a crosslinking agent.

Clause 79. The adhesive composition of Clause 78 wherein the crosslinking agent is from about 0.05% to about 5% by weight of adhesive solids.

[00172] The features, structures, or characteristics of the invention described throughout this specification may be combined in any suitable manner in one or more embodiments. For example, reference throughout this specification to “certain embodiments,” “some embodiments,” or similar language means that a particular feature, structure, or characteristic described in connection with the embodiment is included in at least one embodiment of the present invention. Thus, appearances of the phrases “in certain embodiments,” “in some embodiment,” “in other embodiments,” or similar language throughout this specification do not necessarily all refer to the same group of embodiments and the described features, structures, or characteristics may be combined in any suitable manner in one or more embodiments.

[00173] As described hereinabove, the present subject matter solves many problems associated with previously known compositions and methods. However, it will be appreciated that various changes in the details, materials and arrangements of components and/or operations, which have been herein described and illustrated in order to explain the nature of the subject matter, may be made by those skilled in the art without departing from the principle and scope of the subject matter as expressed in the appended claims.

Claims

WHAT IS CLAIMED IS:

1. An acrylic polymer comprising:
at least one acrylic block copolymer including
a first reactive segment of controlled molecular weight and position that includes at least one monomer having a functional group selected from the group consisting of a UV active functional group, a reactive functional group, a non-reactive functional group, and combinations thereof; and
a second segment of controlled molecular weight and position that includes at least one monomer having a functional group selected from the group consisting of a reactive functional group, a non-reactive functional group, and combinations thereof.
2. The acrylic polymer of claim 1 wherein the first reactive segment includes at least one monomer having a UV active functional group, at least one monomer having a reactive functional group, and at least one monomer having a non-reactive functional group.
3. The acrylic polymer of claim 1 or 2 wherein the first reactive segment includes at least one monomer having a UV active functional group and at least one monomer having a non-reactive functional group.
4. The acrylic polymer of any one of claims 1 to 3 wherein the second segment includes at least one monomer having a reactive functional group and at least one monomer having a non-reactive functional group.
5. The acrylic polymer of any one of claims 1 to 4 wherein the second segment includes at least one monomer having a non-reactive functional group.
6. The acrylic polymer of any one of claims 1 to 5 wherein the first reactive segment includes at least one monomer having a non-reactive functional group and at least one polymerizable comonomer having a crosslinkable functionality, the crosslinkable functionality selected from the group consisting of a UV active functional group, a reactive functional group, and combinations thereof.

7. The acrylic polymer of any one of claims 1 to 6 wherein the first reactive segment includes at least one monomer having a non-reactive functional group and at least one polymerizable comonomer having a crosslinkable functionality, the crosslinkable functionality is a UV active functional group.

8. The acrylic polymer of any one of claims 1 to 7 wherein the at least one monomer having a non-reactive functional group within the first reactive segment is the same type of monomer having a non-reactive functional group present in the second reactive segment.

9. The acrylic polymer of any one of claims 1 to 8 wherein the at least one monomer having a reactive functional group within the first reactive segment is the same type of monomer having a reactive functional group present in the second reactive segment.


10. The acrylic polymer of any one of claims 1 to 9 wherein the at least one monomer having a reactive functional group includes at least one monomer derived from the formula (II):



where R is H or CH₃ and X includes a functional group capable of crosslinking,

wherein the functional group includes at least one functional group selected from the group consisting of hydroxyl, carboxyl, carbonyl, carbonate ester, isocyanate, epoxy, vinyl, amine, amide, imide, anhydride, mercapto (thiol), acid, acrylamide, acetoacetyl groups, alkoxymethylol, cyclic ether groups, and combinations thereof.

11. The acrylic polymer of any one of claims 1 to 10 wherein the at least one monomer having a reactive functional group includes at least one functionalized monomer derived from the formula (I):



where R₃ is H or CH₃ and R₄ is a branched or unbranched, saturated alkyl group having 4 to 14 carbon atoms.

12. The acrylic polymer of any one of claims 1 to 11 wherein the at least one functionalized monomer includes a crosslinkable functional group selected from the group consisting of hydroxyl, carboxyl, carbonyl, carbonate ester, isocyanate, epoxy, vinyl, amine, amide, imide, anhydride, mercapto (thiol), acid, acrylamide, acetoacetyl groups, alkoxymethylol, cyclic ether groups, and combinations thereof.

13. The acrylic polymer of any one of claims 1 to 12 wherein the at least one monomer having a non-reactive functional group includes at least one monomer derived from the formula (I):



where R₃ is H or CH₃ and R₄ is a branched or unbranched, saturated alkyl group having 4 to 14 carbon atoms.

14. The acrylic polymer of any one of claims 1 to 13 wherein the at least one monomer having a non-reactive functional group is derived from C₁ to about C₂₀ alkyl, aryl, or cyclic acrylates or C₁ to about C₂₀ alkyl, aryl, or cyclic methacrylates.

15. The acrylic polymer of any one of claims 1 to 14 wherein the first reactive segment includes about 40% to about 99% by weight of the at least one monomer having a non-reactive functional group.

16. The acrylic polymer of any one of claims 1 to 15 wherein the at least one monomer having a UV active functional group is about 10% or less by weight of the total polymer weight.

17. The acrylic polymer of any one of claims 1 to 16 wherein the second segment is non-reactive with the UV active functional group and/or the reactive functional group.

18. The acrylic polymer of any one of claims 1 to 17 wherein the at least one monomer having a non-reactive functional group is non-reactive with the UV active functional group and/or the reactive functional group.

19. The acrylic polymer of any one of claims 1 to 18 wherein the first reactive segment and the second segment are positioned adjacent to the polymer chain ends.

20. The acrylic polymer of any one of claims 1 to 19 wherein the reactive functional groups and/or the non-reactive functional groups are randomly spaced apart along the length of the polymer chain.

21. The acrylic polymer of any one of claims 1 to 20 wherein the first reactive segment comprises 40% or less of the total polymer molecular weight.

22. The acrylic polymer of any one of claims 1 to 21 wherein the first reactive segment and the second segment are molecularly miscible before cure.

23. The acrylic polymer of any one of claims 1 to 22 wherein the acrylic polymer is a single phase polymer at room temperature.

24. The acrylic polymer of any one of claims 1 to 23 wherein the acrylic polymer is a single phase polymer prior to crosslinking.

25. The acrylic polymer of any one of claims 1 to 24 wherein the first reactive segment and the second segment are molecularly miscible before cure as expressed by their properties in the bulk state that are indicative of a single phase polymer.

26. The acrylic polymer of any one of claims 1 to 25 wherein the acrylic polymer is a single phase liquid polymer at room temperature.

27. The acrylic polymer of any one of claims 1 to 26 wherein the acrylic polymer is a single phase liquid polymer prior to crosslinking.

28. The acrylic polymer of any one of claims 1 to 27 wherein the acrylic polymer is a liquid polymer at room temperature.

29. The acrylic polymer of any one of claims 1 to 28 wherein the acrylic polymer is a liquid polymer prior to crosslinking.

30. The acrylic polymer of any one of claims 1 to 29 wherein the acrylic polymer is a homogeneous polymer at room temperature.

31. The acrylic polymer of any one of claims 1 to 30 wherein the acrylic polymer is a homogeneous polymer prior to crosslinking.

32. The acrylic polymer of any one of claims 1 to 31 wherein the acrylic polymer is a homogeneous liquid polymer prior to crosslinking.

33. The acrylic polymer of any one of claims 1 to 32 wherein the acrylic polymer is a homogeneous liquid polymer at room temperature.

34. The acrylic polymer of any one of claims 1 to 33 wherein the acrylic polymer exhibits no heterogeneity prior to crosslinking.


35. The acrylic polymer of any one of claims 1 to 34 wherein the acrylic polymer exhibits no heterogeneity at room temperature.

36. The acrylic polymer of any one of claims 1 to 35 wherein the glass transition temperature (T_g) of the acrylic polymer is within a range of from about 15° C to about -115° C.

37. The acrylic polymer of any one of claims 1 to 36 wherein the UV active functional group is selected from the group consisting of benzophenones, double bonds, and combinations thereof.

38. The acrylic polymer of any one of claims 1 to 37 wherein the UV active functional group is a benzophenone.

39. The acrylic polymer of any one of claims 1 to 38 wherein the UV active functional group is represented by Formula (III) as follows:



(III)

in which R₁ and R₂ is each independently an organic radical selected from the group consisting of methyl, aryl, and alkyl.

40. The acrylic polymer of any one of claims 1 to 39 wherein R₁ and R₂ is each independently an aromatic or substituted aromatic group.

41. The acrylic polymer of any one of claims 1 to 40 wherein R₁ and R₂ is each independently a phenyl or substituted phenyl group.

42. The acrylic polymer of any one of claims 1 to 41 wherein the UV active functional group is selected from the group consisting of acetophenone, an acetophenone derivative, benzophenone, a benzophenone derivative, anthraquinone, an anthraquinone derivative, benzile, a benzile derivative, thioxanthone, a thioxanthone derivative, xanthone, a xanthone derivative, a benzoin ether, a benzoin ether derivative, an alpha-ketol, an alpha-ketol derivative, and combinations thereof.

43. The acrylic polymer of any one of claims 1 to 42 wherein the reactive functional group is selected from the group consisting of hydroxyl, carboxyl, carbonyl, carbonate ester, isocyanate, epoxy, vinyl, amine, amide, imide, anhydride, mercapto (thiol), acid, acrylamide, acetoacetyl groups, alkoxyethylol, cyclic ether groups, and combinations thereof.

44. The acrylic polymer of any one of claims 1 to 43 wherein the reactive functional group is an acid.

45. The acrylic polymer of any one of claims 1 to 44 wherein the acrylic polymer has a polydispersity greater than 3.0.

46. The acrylic polymer of any one of claims 1 to 45 wherein the acrylic polymer has a number average molecular weight (Mn) within a range of from about 5,000 g/mol to about 150,000 g/mol.

47. The acrylic polymer of any one of claims 1 to 46 comprising two first reactive segments A and one second segment B.

48. The acrylic polymer of claim 47 wherein the segments A are positioned on either side of the middle segment B on the polymer chain to define an ABA structure.

49. The acrylic polymer of any one of claims 1 to 46 comprising two second segments B and one first reactive segment A.

50. The acrylic polymer of claim 49 wherein the blocks B are positioned on either side of the middle block A on the polymer chain to define a BAB structure.

51. An acrylic polymer comprising:
at least one acrylic block copolymer including
a first reactive segment of controlled molecular weight and position that includes at least one monomer having a functional group selected from the group consisting of a UV active functional group, a reactive functional group, a non-reactive functional group, and combinations thereof; and
a second segment of controlled molecular weight and position that includes at least one monomer having a functional group selected from the group consisting of a reactive functional group, a non-reactive functional group, and combinations thereof,

wherein the first reactive segment includes at least one monomer having a non-reactive functional group and at least one polymerizable comonomer having a crosslinkable functionality, the crosslinkable functionality selected from the group consisting of a UV active functional group, a reactive functional group, and combinations thereof.

52. The acrylic polymer of claim 51 wherein the first reactive segment includes a copolymer derived from one or more of the monomers of the second segment and at least one polymerizable comonomer having a crosslinkable functionality, the crosslinkable functionality selected from the group consisting of a UV active functional group, a reactive functional group, and combinations thereof.

53. The acrylic polymer of claim 51 or 52 wherein the at least one monomer having a non-reactive functional group within the first reactive segment is the same type of monomer having a non-reactive functional group present in the second reactive segment.

54. The acrylic polymer of any one of claims 51 to 53 wherein the acrylic polymer is a homogeneous polymer prior to crosslinking.

55. The acrylic polymer of any one of claims 51 to 54 wherein the first reactive segment comprises 40% or less of the total polymer molecular weight.

56. The acrylic polymer of any one of claims 51 to 55 wherein the at least one monomer having a UV active functional group is about 10% or less by weight of the total polymer weight.

57. The acrylic polymer of any one of claims 51 to 56 wherein the first reactive segment includes about 40% to about 99% by weight of the at least one monomer having a non-reactive functional group.

58. A pressure sensitive adhesive composition comprising:
the acrylic polymer of any one of claims 1 to 50 or claims 51 to 57; and
a crosslinking agent.

59. The adhesive composition of claim 58 wherein the crosslinking agent is from about 0.05% to about 5% by weight of adhesive solids.

60. The adhesive composition of claim 58 or 59 wherein the crosslinking agent is activated using one of heat, actinic radiation, electron beam radiation, and a metal based catalyst.

61. The adhesive composition of any one of claims 58 to 60 wherein the adhesive composition further comprises at least one agent selected from the group consisting of tackifiers, plasticizers, antioxidants, pH controllers, medicaments, bactericides, growth factors, wound healing components, deodorants, perfumes, antimicrobials, fungicides, cutting agents, pigments, filler, diluents, flame retardants, and combinations thereof.

62. The adhesive composition of any one of claims 58 to 61 wherein the weight percentage of solids is greater than 50%.

63. The adhesive composition of any one of claims 58 to 62 wherein the adhesive exhibits an elastic/storage modulus (G') of less than the Dahlquist criterion value of 3×10^6 dynes/cm² (3×10^5 Pa) at room temperature.

64. The adhesive composition of any one of claims 58 to 63 wherein the glass transition temperature (T_g) of the adhesive composition is within a range of from about 15° C to about -115° C.

65. A method of preparing a pressure sensitive adhesive composition comprising:
polymerizing using a controlled radical polymerization process at least one monomer having a functional group selected from the group consisting of a UV active functional group, a reactive functional group, a non-reactive functional group, and combinations thereof to thereby form a first reactive segment of controlled molecular weight and position;

polymerizing using a controlled radical polymerization process at least one monomer having a functional group selected from the group consisting of a reactive functional group, a non-reactive functional group, and combinations thereof to thereby form a second segment of controlled molecular weight and position;

forming an acrylic polymer from the first reactive segment and the second segment; and
crosslinking the acrylic polymer by mixing the acrylic polymer with an amount of a crosslinking agent.

66. The method of claim 65 wherein at least one of the first reactive segment and the second segment is polymerized in the presence of a RAFT agent.

67. The method of claim 65 or 66 wherein at least one of the first reactive segment and the second segment is polymerized in the presence of an SFRP agent.

68. An adhesive article comprising:
a substrate; and
the adhesive of any one of claims 58 to 64 disposed on the substrate.

69. The adhesive article of claim 68 wherein the article is in the form of a tape.

70. An acrylic polymer consisting of:
at least one acrylic block copolymer having
a first reactive segment of controlled molecular weight and position consisting of at least one monomer having a UV active functional group, at least one monomer having a reactive functional group, and at least one monomer having a non-reactive functional group; and
a second segment of controlled molecular weight and position consisting of at least one monomer having a reactive functional group, and at least one monomer having a non-reactive functional group.

71. The acrylic polymer of claim 70 wherein the first reactive segment consists of at least one monomer having a non-reactive functional group and at least one polymerizable comonomer having a crosslinkable functionality, the crosslinkable functionality consisting of a UV active functional group and a reactive functional group.

72. The acrylic polymer of claims 70 or 71 wherein the first reactive segment consists of a copolymer derived from one or more of the monomers of the second segment and at least one polymerizable comonomer having a crosslinkable functionality, the crosslinkable functionality consisting of a UV active functional group and a reactive functional group.

73. The acrylic polymer of any one of claims 70 to 72 wherein the at least one monomer having a non-reactive functional group within the first reactive segment is the same type of monomer present in the second reactive segment.

74. The acrylic polymer of any one of claims 70 to 73 wherein the acrylic polymer is a homogeneous polymer prior to crosslinking.

75. The acrylic polymer of any one of claims 70 to 74 wherein the first reactive segment is about 40% or less of the total polymer molecular weight.

76. The acrylic polymer of any one of claims 70 to 75 wherein the at least one monomer having a UV active functional group is about 10% or less by weight of the total polymer weight.

77. The acrylic polymer of any one of claims 70 to 76 wherein the first reactive segment includes about 40% to about 99% by weight of the at least one monomer having a non-reactive functional group.

78. A pressure sensitive adhesive composition consisting of:
the acrylic polymer of any one of claims 70 to 77; and
a crosslinking agent.

79. The adhesive composition of claim 78 wherein the crosslinking agent is from about 0.05% to about 5% by weight of adhesive solids.

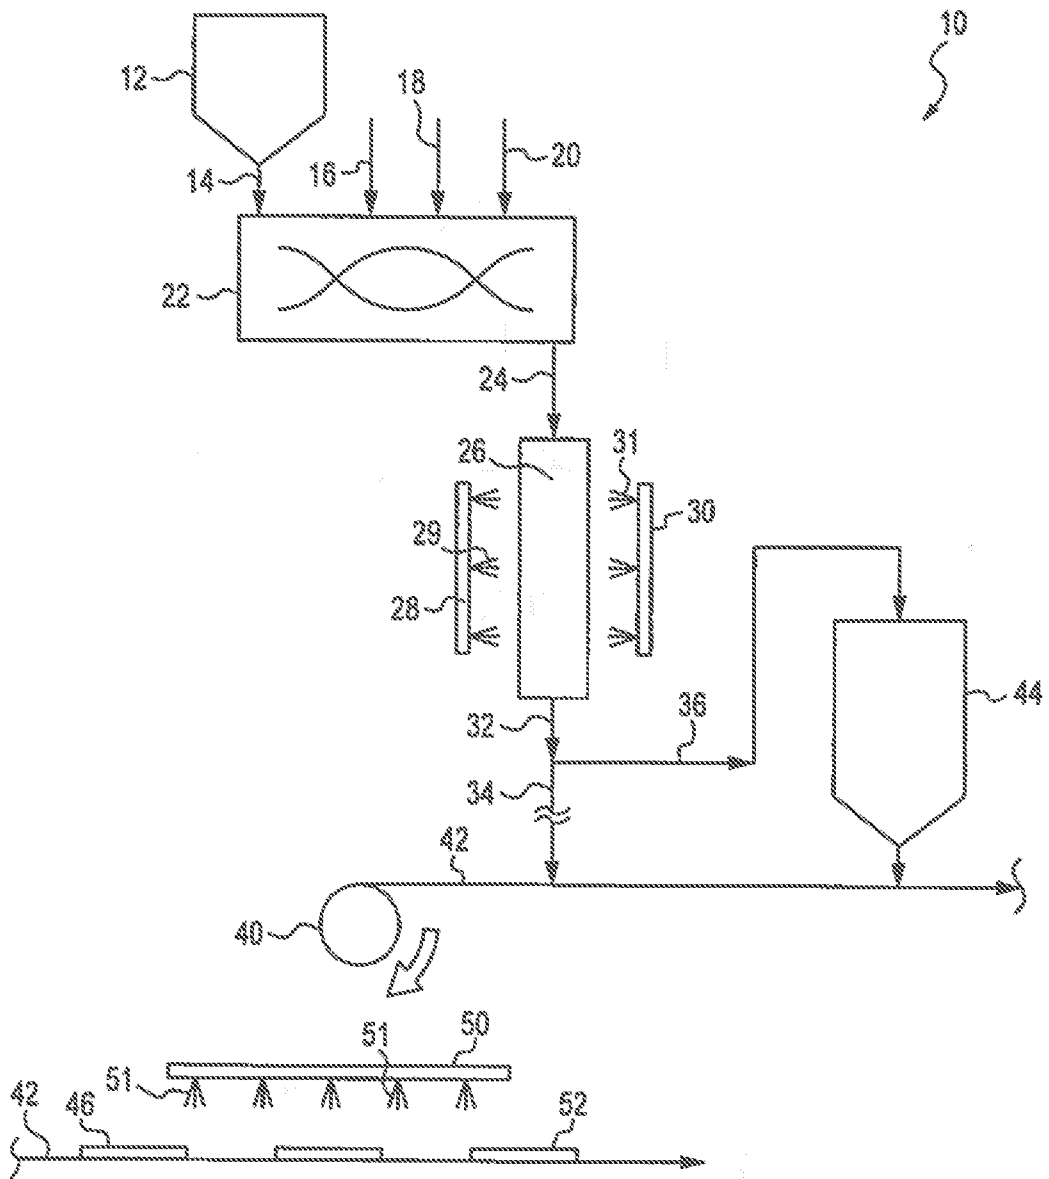


FIG. 1

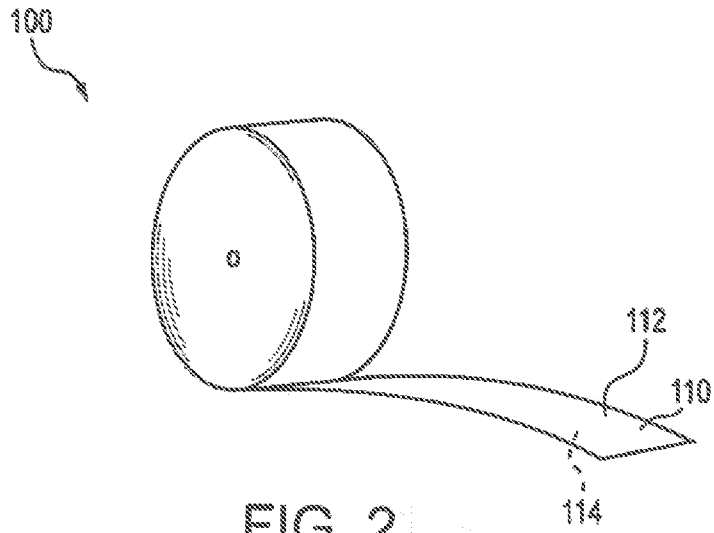


FIG. 2

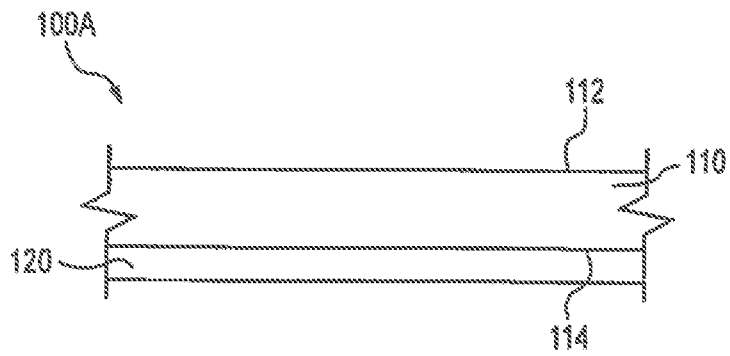


FIG. 3

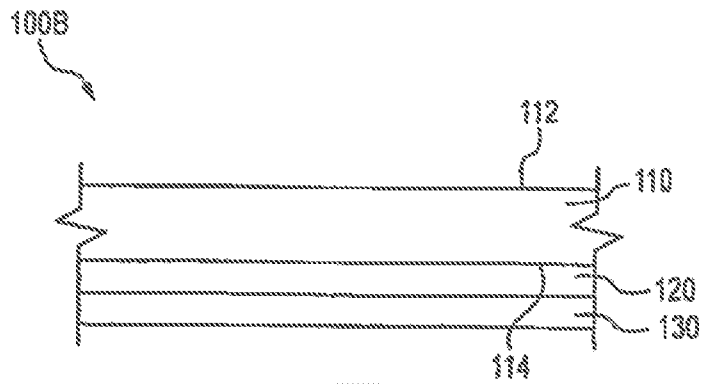


FIG. 4

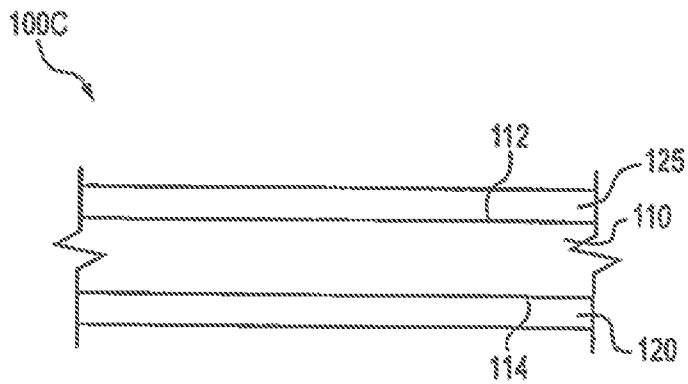


FIG. 5

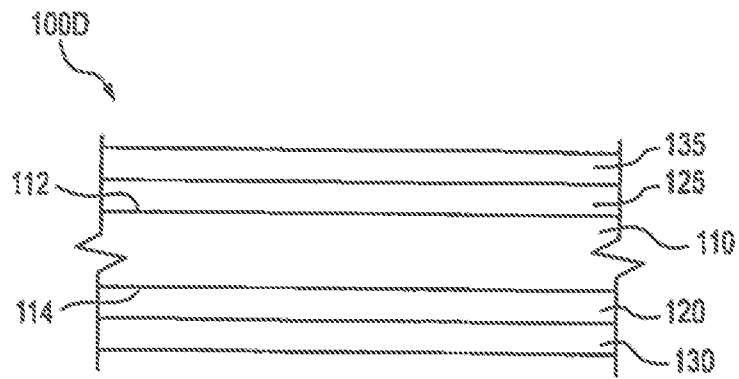


FIG. 6

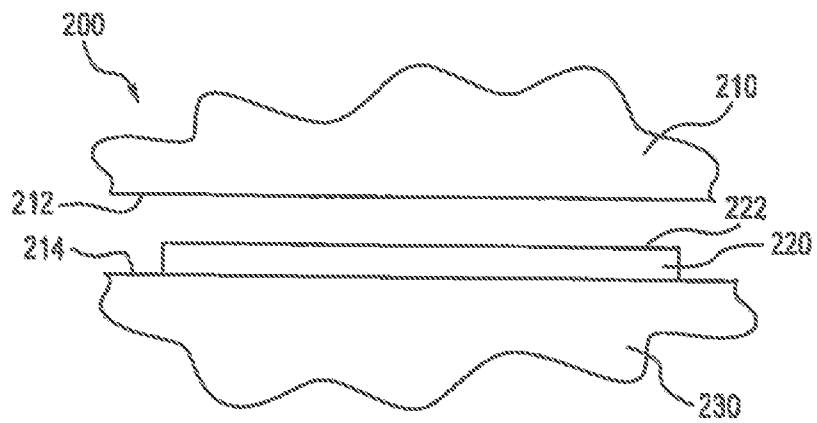


FIG. 7

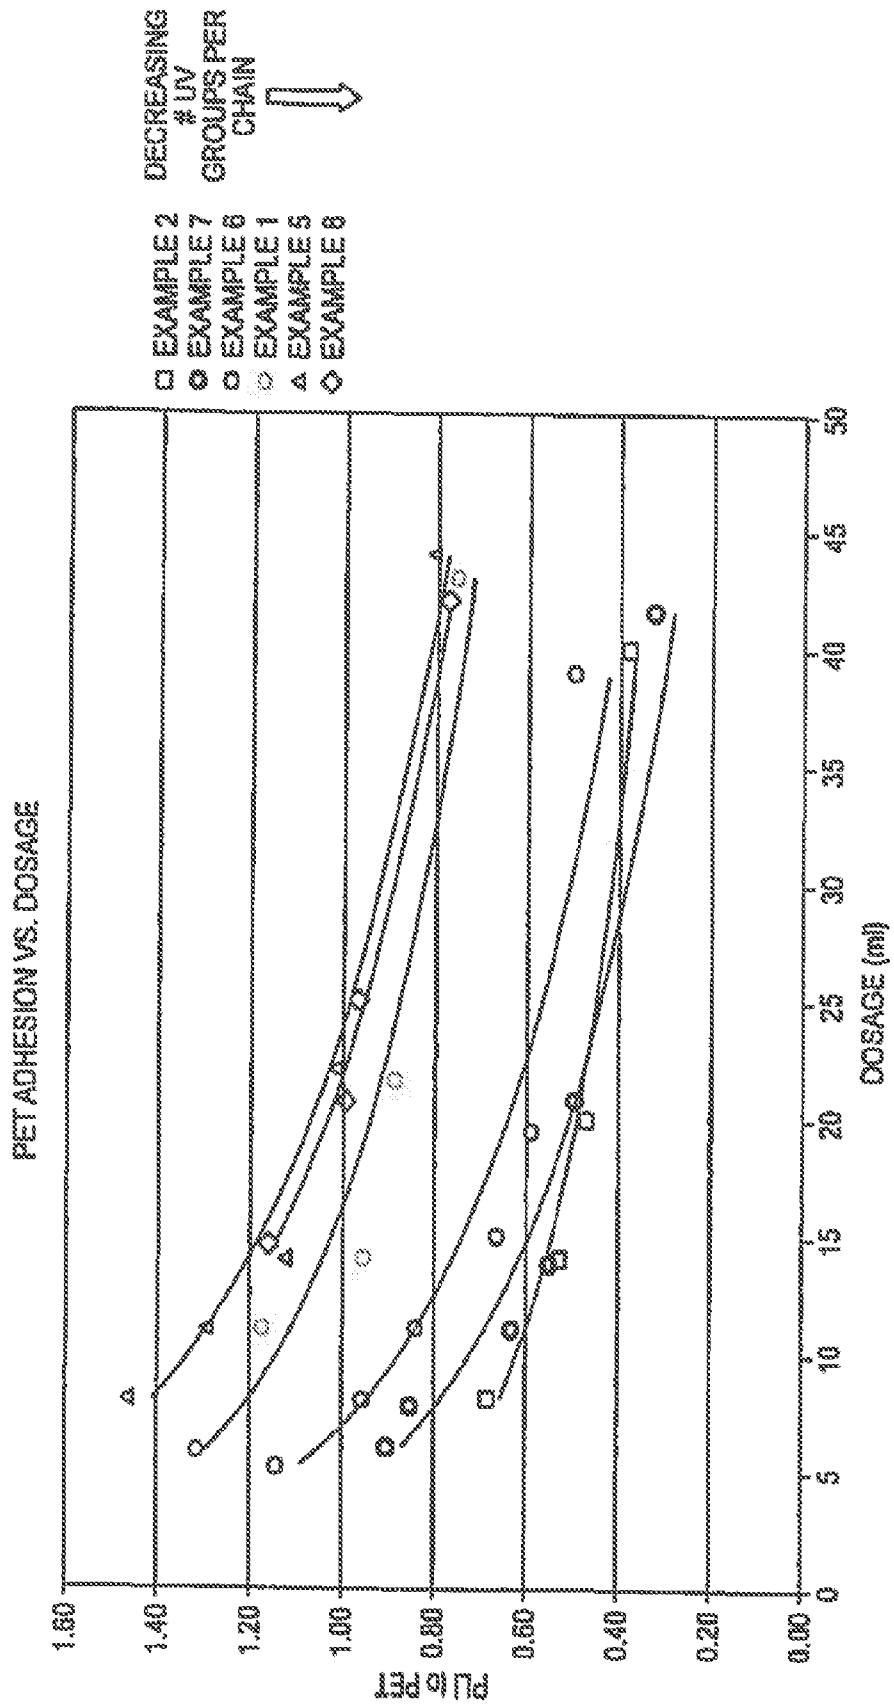


FIG. 8

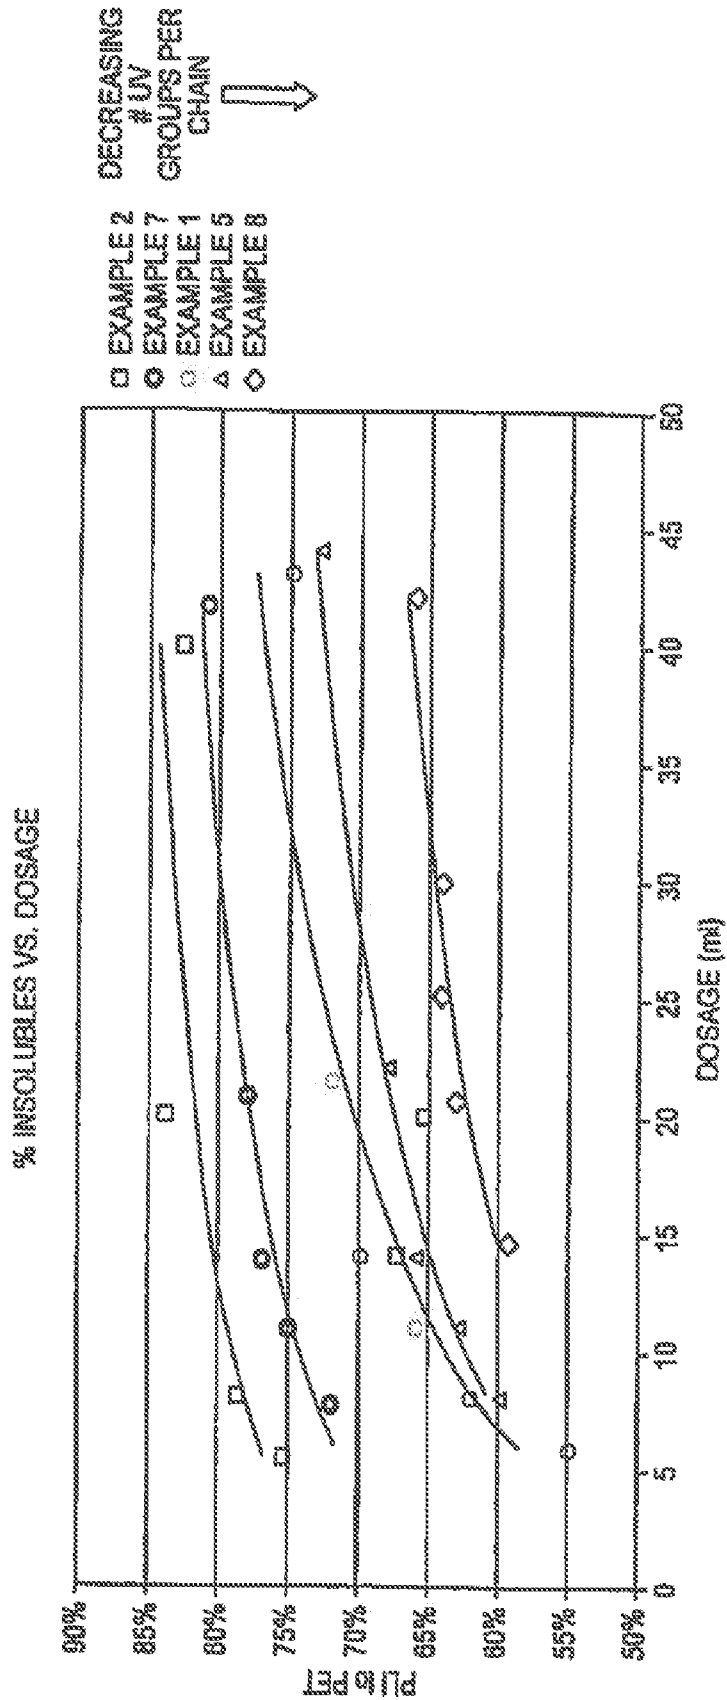


FIG. 9

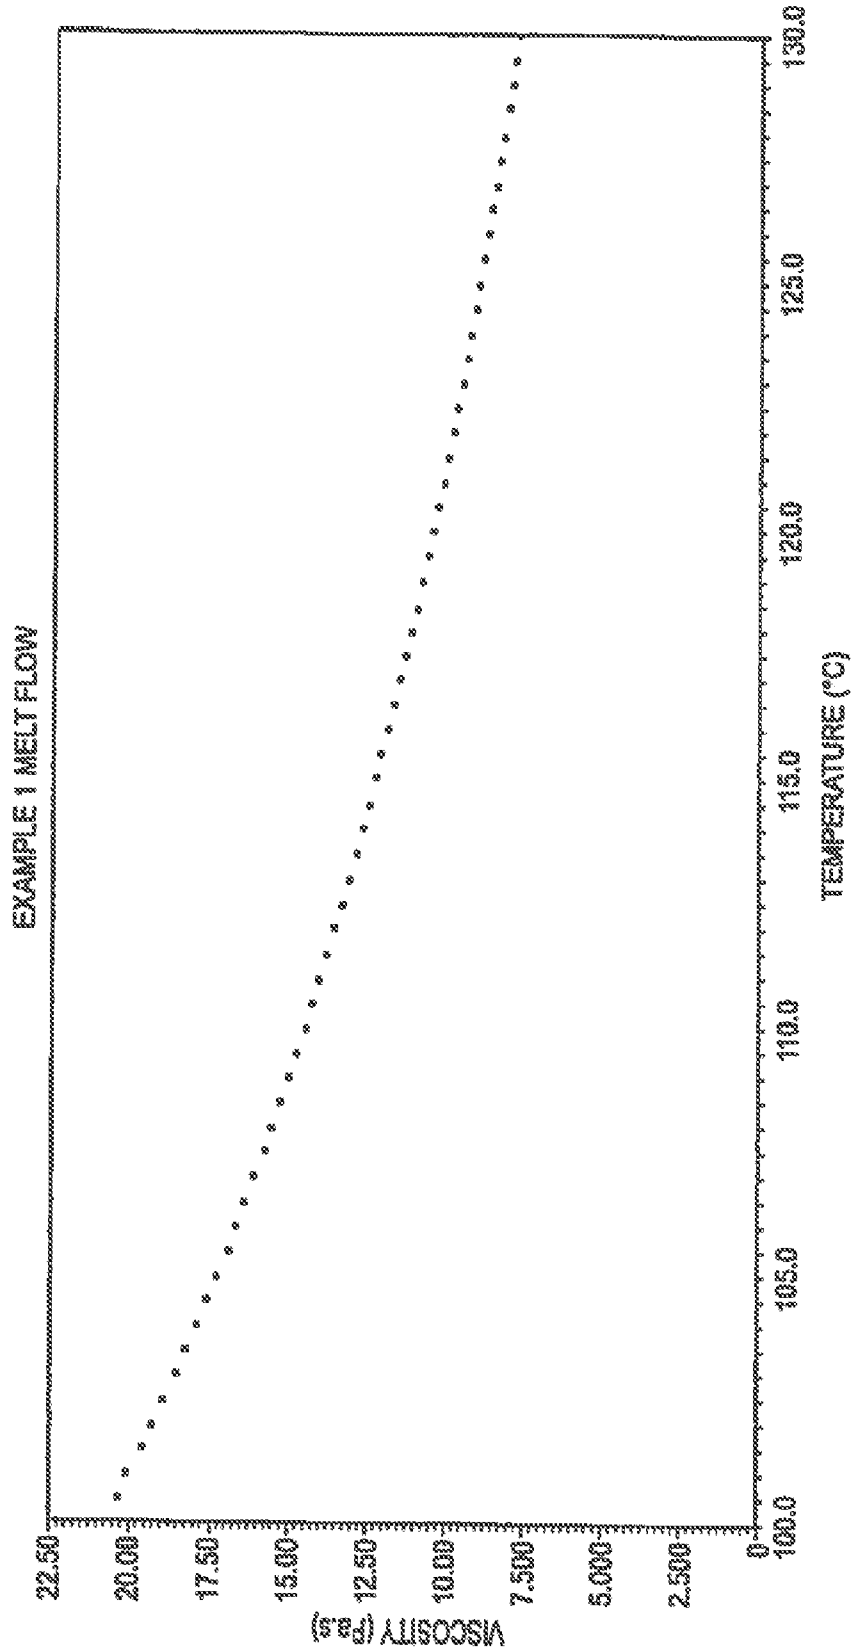


FIG. 10

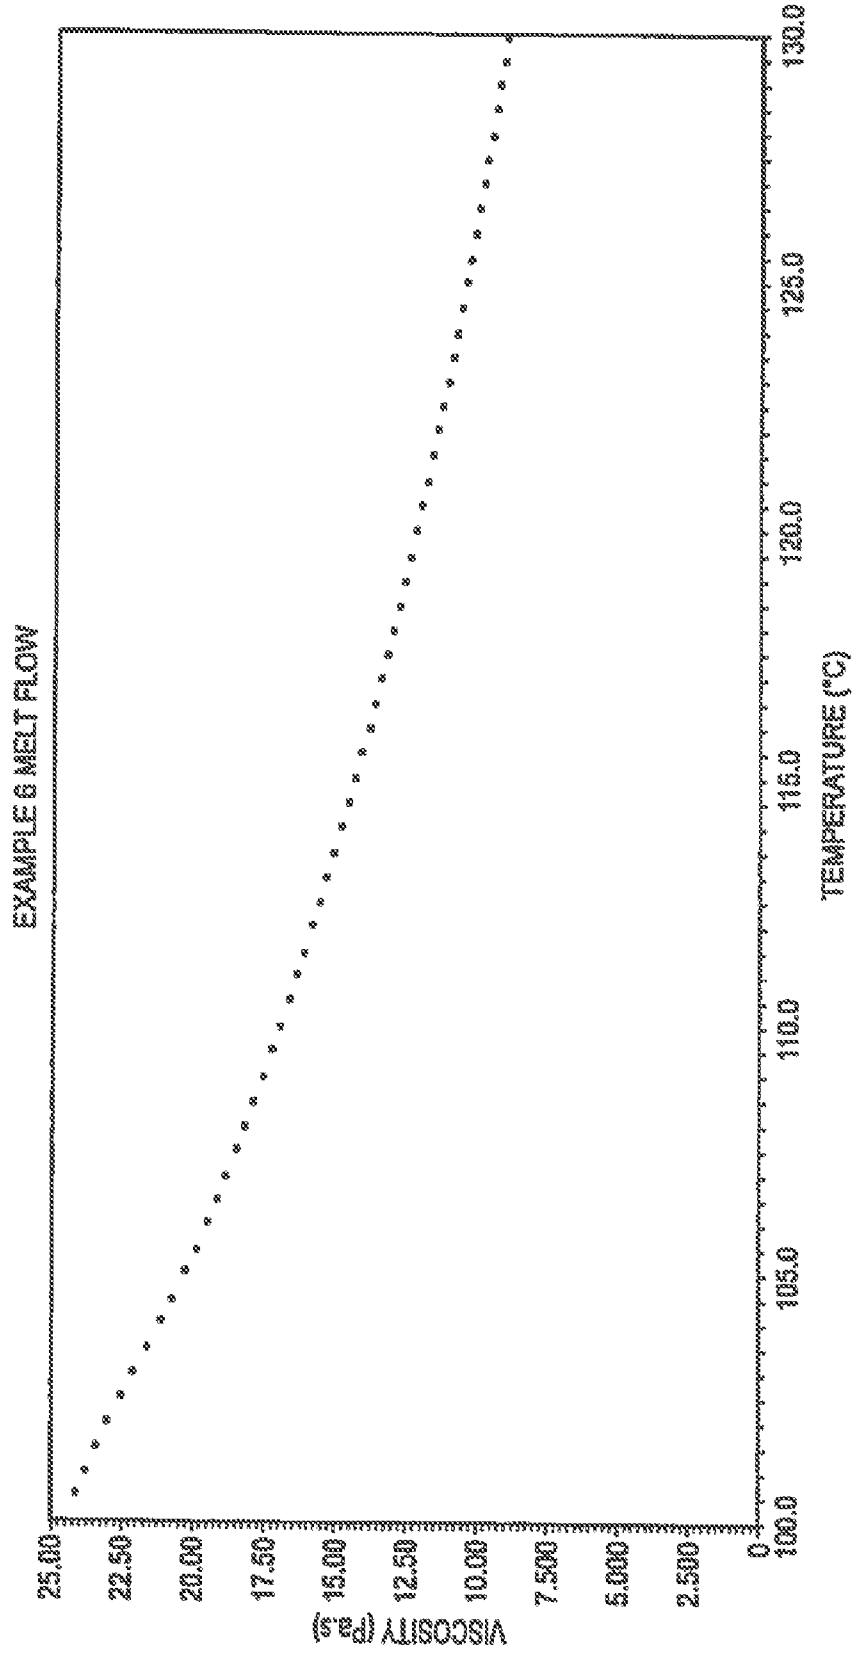


FIG. 11

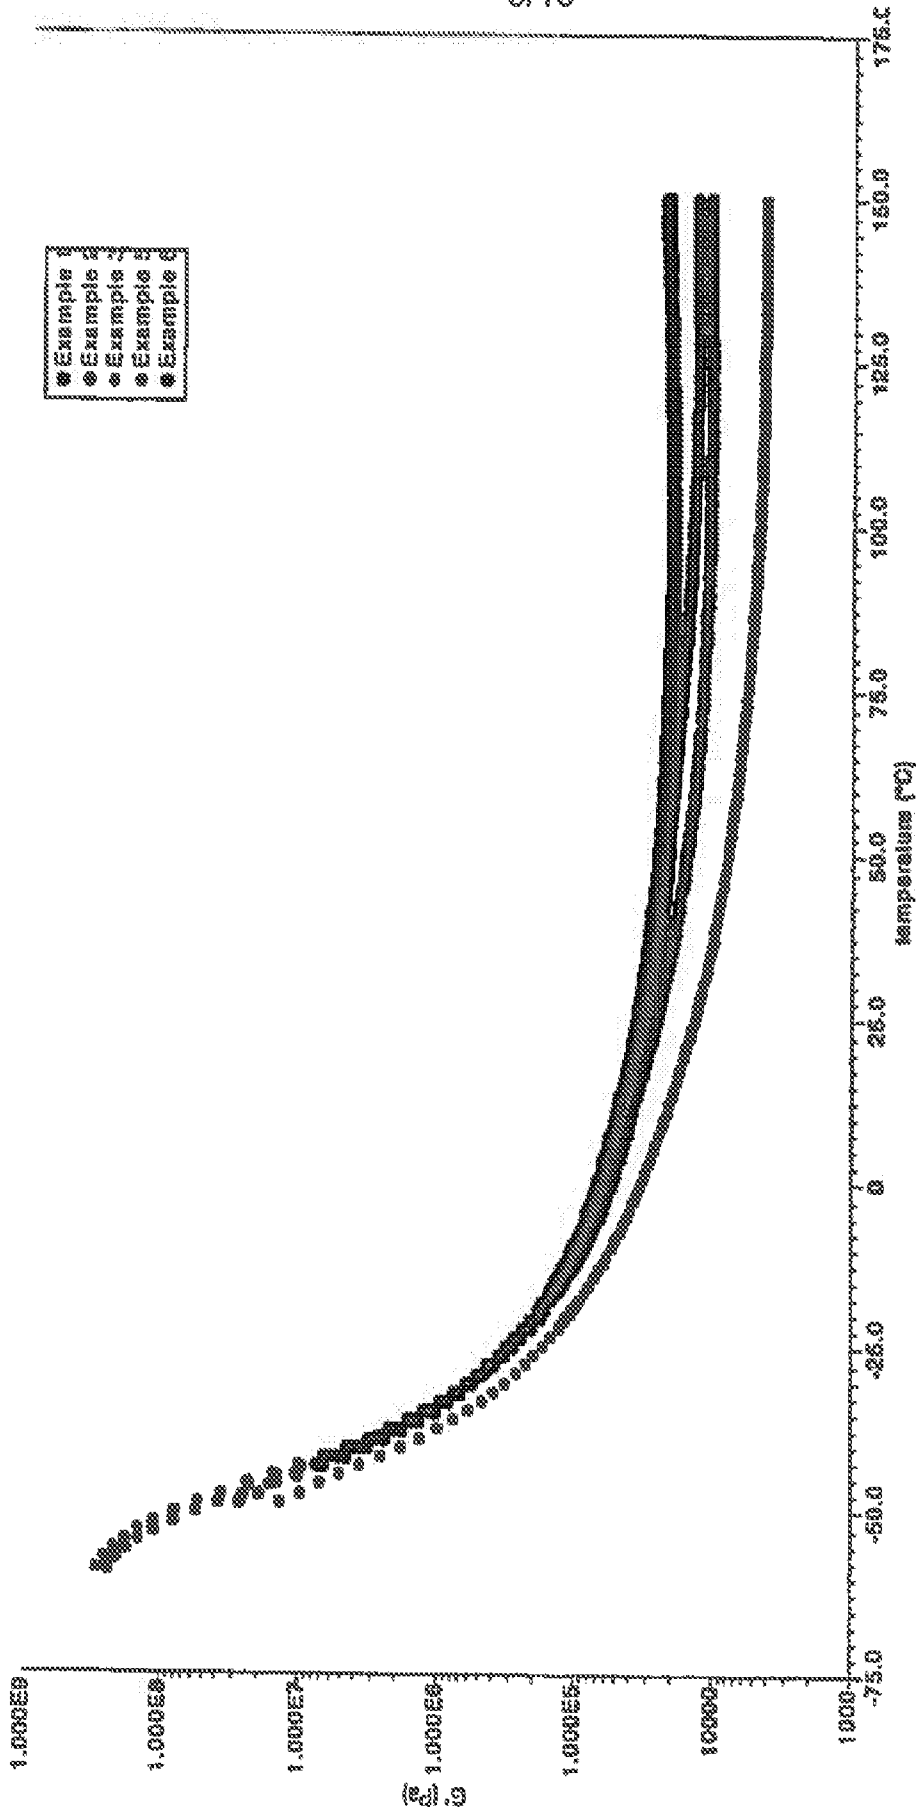


FIG. 12

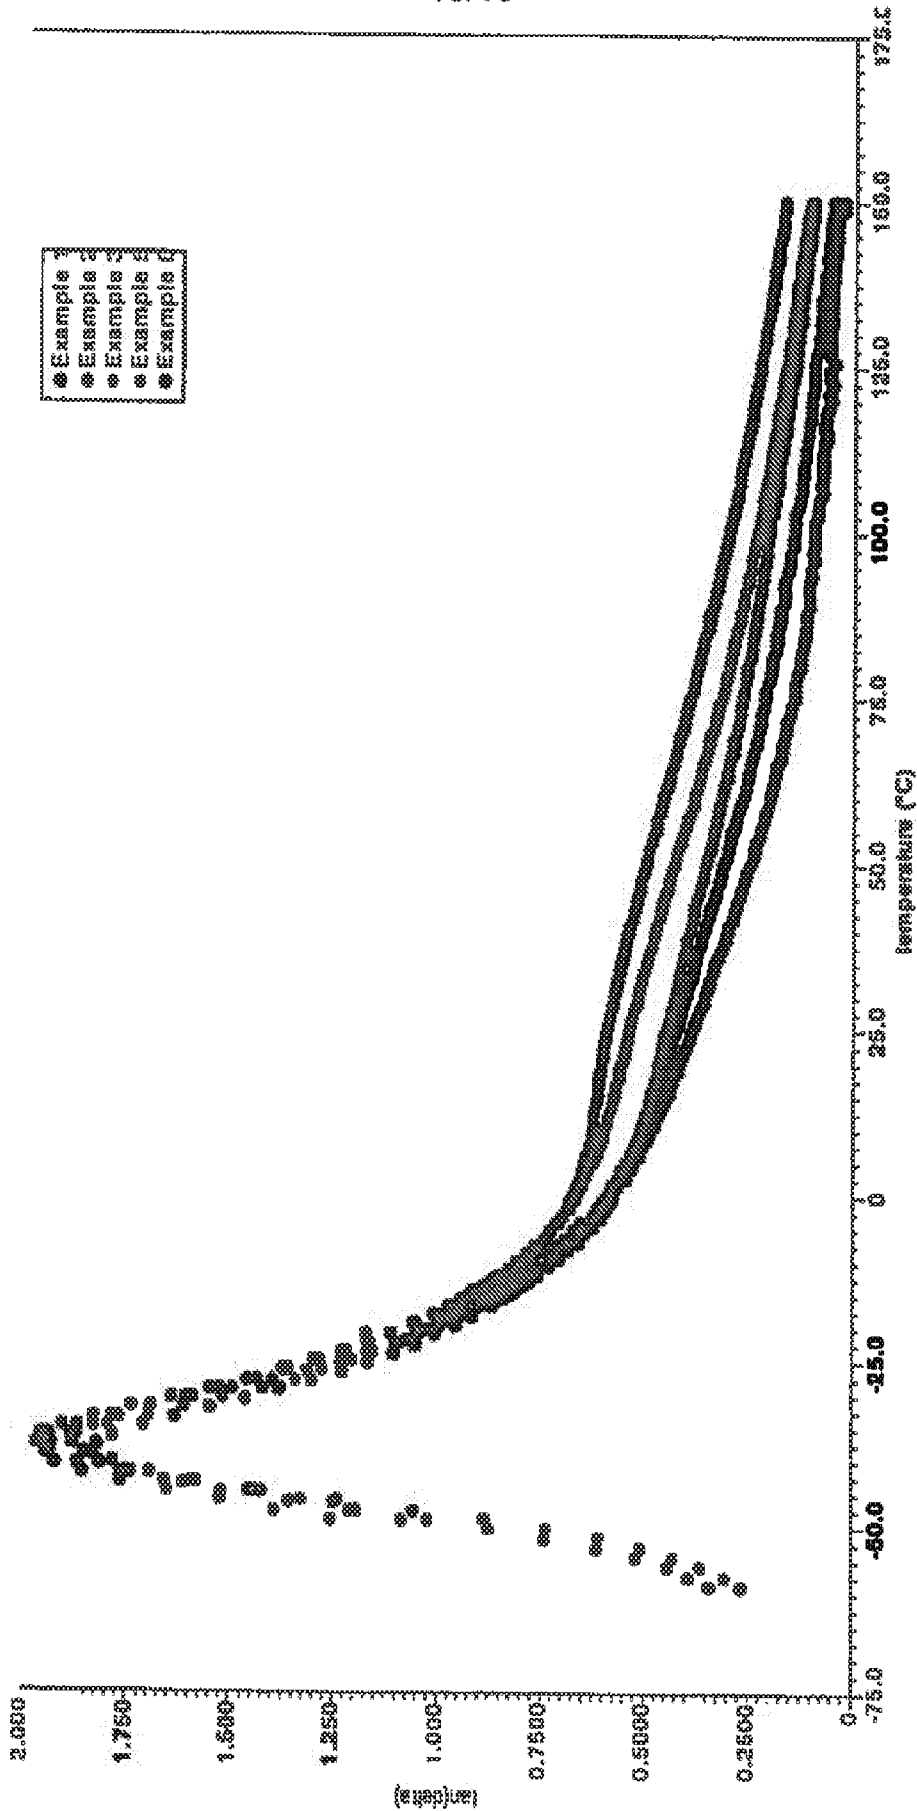


FIG. 13

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2017/058284

A. CLASSIFICATION OF SUBJECT MATTER
 INV. C08F293/00 C09J153/00 C09J7/38
 ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
 C08F C09J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
 EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2012/126724 A1 (HENKEL AG & CO KGAA [DE]; EVONIK ROEHM GMBH [DE]; PALASZ PETER D [GB];) 27 September 2012 (2012-09-27) claims; examples -----	1-79
X	WO 2009/117654 A1 (AVERY DENNISON CORP [US]; LESTER CHRISTOPHER L [US]; MILLER BRANDON S) 24 September 2009 (2009-09-24) claims; examples -----	1,4-6, 8-15, 17-36, 43-79
X	WO 2016/100251 A1 (HENKEL IP & HOLDING GMBH [DE]; HENKEL AG & CO KGAA [DE]; WOODS JOHN G) 23 June 2016 (2016-06-23) paragraphs [0025], [0044], [0045]; claims 1, 7, 8 ----- -/--	1-3,5-8, 10-21, 37-65, 68-79

Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents :

<p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier application or patent but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p>	<p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"&" document member of the same patent family</p>
---	---

Date of the actual completion of the international search	Date of mailing of the international search report
12 January 2018	23/01/2018

Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer Degrendel, Magali
--	---

INTERNATIONAL SEARCH REPORT

International application No PCT/US2017/058284

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 1 595 930 A1 (TESA AG [DE]) 16 November 2005 (2005-11-16) claims	1
X,P	----- WO 2016/179076 A1 (AVERY DENNISON CORP [US]) 10 November 2016 (2016-11-10) claims 1, 24; examples -----	1

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2017/058284

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2012126724 A1	27-09-2012	BR 112013023769 A2	06-12-2016
		CN 103476816 A	25-12-2013
		EP 2500367 A1	19-09-2012
		EP 2686357 A1	22-01-2014
		JP 6005671 B2	12-10-2016
		JP 2014513166 A	29-05-2014
		KR 20140012674 A	03-02-2014
		US 2013197156 A1	01-08-2013
		WO 2012126724 A1	27-09-2012

WO 2009117654 A1	24-09-2009	AU 2009225508 A1	24-09-2009
		BR P10908995 A2	21-03-2017
		CN 102037091 A	27-04-2011
		EP 2268758 A1	05-01-2011
		ES 2443124 T3	17-02-2014
		KR 20100137520 A	30-12-2010
		KR 20160034426 A	29-03-2016
		RU 2010142199 A	20-02-2013
		US 2011118372 A1	19-05-2011
		WO 2009117654 A1	24-09-2009

WO 2016100251 A1	23-06-2016	CN 107207653 A	26-09-2017
		EP 3233940 A1	25-10-2017
		US 2016168298 A1	16-06-2016
		WO 2016100251 A1	23-06-2016

EP 1595930 A1	16-11-2005	DE 102004023637 A1	08-12-2005
		EP 1595930 A1	16-11-2005
		US 2005250906 A1	10-11-2005

WO 2016179076 A1	10-11-2016	AU 2016258589 A1	16-11-2017
		CA 2984361 A1	10-11-2016
		US 2016319169 A1	03-11-2016
		WO 2016179076 A1	10-11-2016
