

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
7 March 2002 (07.03.2002)

PCT

(10) International Publication Number
WO 02/19716 A1

(51) International Patent Classification⁷: H04N 7/173

(21) International Application Number: PCT/US01/27313

(22) International Filing Date: 31 August 2001 (31.08.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/230,222 31 August 2000 (31.08.2000) US

(71) Applicant (for all designated States except US): **MIXED SIGNALS TECHNOLOGIES, INC.** [US/US]; 8671 Hayden Place, Culver City, CA 90232 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **BARONE, Samuel, T., Jr.** [US/US]; 6170 Canterbury Drive #224, Culver City, CA 90230 (US). **SMITH, Drake** [US/US]; 75 Peach Farm Road, Oxford, CT 06478 (US).

(74) Agent: **HASAN, Syed, A.**; Christie, Parker & Hale, LLP, P.O. Box 7068, Pasadena, CA 91109-7068 (US).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: SYSTEMS AND METHOD FOR INTERACTING WITH USERS OVER A COMMUNICATIONS NETWORK

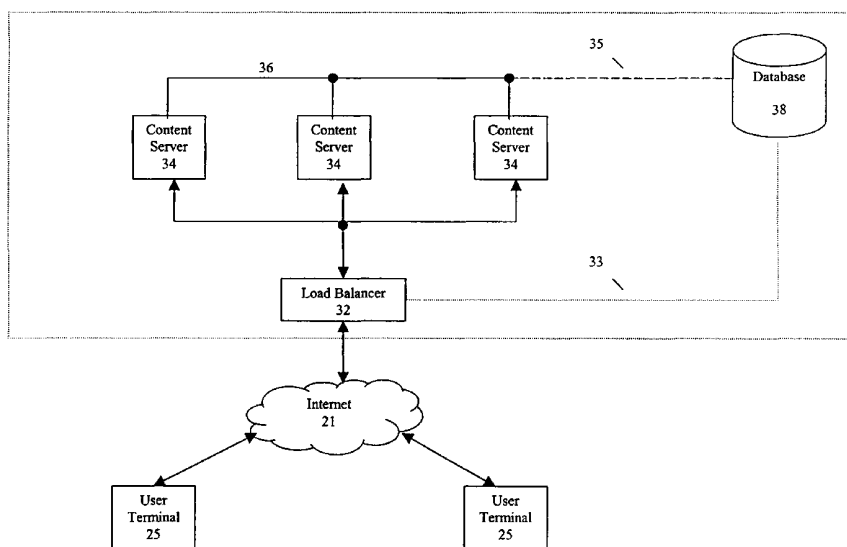

(57) Abstract: A system and method for efficiently and quickly handling content and transaction requests from various users at respective end terminals (25). According to embodiments of the invention, plural servers (34) are provided at the web site to randomly receive requests from users over a communications network, such as the Internet (21). Each server (34) contains a memory, such as a cache or disk storage process, that contains a copy of all data contained on every other server. When a request comes in to one of the servers (34), in addition to processing the request, that server broadcasts data corresponding to the request to the other servers, which are programmed to store the same request data in their respective local memories. Such broadcasts may be preferably carried out over a back-end, private network (36).



WO 02/19716 A1

1 **SYSTEM AND METHOD FOR INTERACTING WITH USERS OVER A**
 COMMUNICATIONS NETWORK

FIELD OF THE INVENTION

5 The present invention relates to techniques for efficiently interacting with plural end users over a communications network. More particularly, the invention relates to a distributed system with plural server nodes that are continually updated such that each node is capable of handling any incoming request from any user.

10 **CROSS-REFERENCE TO RELATED APPLICATIONS**

 This application claims priority from provisional application number 60/230,222 entitled "System and Method for Interacting with User over a Communications Network" filed 08/31/2000, which is incorporated by reference herein as though set forth in full.

15 **BACKGROUND OF THE INVENTION**

 Communications networks, such as the Internet, wide area networks (WAN), local area networks (LAN), and the like, are used for many different purposes. One of the major purposes of such a network is the transmission of data from one location to another, for example, from a central hub to a plurality of end user terminals. Such data can be simple text data, a combination
 20 of text and graphic data, video data, audio data, and the like.

 In the case of the Internet, a large number of users may be accessing a particular web site at any given time. Commonly, the users accessing the same site are routed to various servers located at the web site facility, using an Internet facility, which distributes the requests among the various servers. In other embodiments the user requests are routed by a machine, which may
 25 be used to balance the demand among the various servers, such that the load is generally evenly spread between the respective servers. The servers commonly have access to a central database that contains all of the content, which the users may request from the web site. Thus, it does not matter which server is assigned to a user at any particular time, since any server can access the database and retrieve the content.

30 One use of the Internet is to facilitate interactive television ("ITV"). Interactive television combines conventional television with additional content ("interactive content") to present a viewer with an enhanced version of a television program or commercial. In order to experience interactive TV, a viewer may make use of an ITV receiver. Such an ITV receiver may be, for example a "set-top" box, or a TV receiver that has built-in ITV receiver capabilities. ITV
 35 receivers may receive specially prepared TV signals which may include, but are not limited to, ITV data in the form of Uniform Resource Locators ("URLs"), triggers (e.g., Java-script function

1 calls), and display files. An ITV receiver receives and decodes ITV data, which may then be
used to access interactive content from a remote location.

5 Today, interactive television commonly uses the World Wide Web ("Web") technology
for delivering and viewing enhanced content. Specific web sites, addressed using URLs, are
created and maintained as ITV sites. The content of many of these sites may be viewed using
ITV receivers in much the same way that a computer can browse a web site. ITV receivers may
include web browsers, which may display downloaded content along with TV video on a
conventional television set. ITV receivers may obtain ITV web content via one of the ITV web
sites, for example over a telephone line, which connects the ITV receiver to the Internet via an
10 Internet service provider (ISP). Which sites are accessed, and how content is displayed, is
determined by the ITV content. ITV content commonly includes links and triggers contained in
the video portion of an ITV program. One method for encoding interactive TV links and triggers
is specified in Electronic Industries Association specification number 746 (EIA-746) which is
entitled "Transport of Internet Uniform Resource Locator (URL) Information Using Text-2
15 Service". EIA 746 is hereby expressly incorporated by reference herein.

Commonly, when a television program with available ITV content is received, the ITV
viewer is given an option to receive the enhanced experience. If the viewer chooses to take
advantage of the enhancements, the ITV receiver may establish a telephone connection to the
Internet (if a connection is not already made), find an ITV web site based on a URL embedded
20 in the ITV program, and download content that produces the enhanced experience.

Figure 1 illustrates the overall signal and data flow for an exemplary ITV system. During
the production phase of an ITV program or commercial, a program is edited from one or more
master recordings 10. During the editing certain URL links and command triggers are embedded,
by means of a data encoder 12, into the program, for example, in the vertical blanking interval
25 ("VBI") of the video portion of the ITV program. A data recorder 14 records the modified
program for subsequent broadcast.

When desired the ITV program is broadcast, along with the embedded URLs and/or
command triggers, by means of a data player 16 and broadcast station 18. An ITV receiver 20
in a viewer's home may receive these URLs and triggers. The ITV receiver may use the URLs
and triggers to retrieve enhanced content from the Internet 21, for example by way of a telephone
30 interface 22. The telephone interface may provide a two-way communication between the viewer
and an ITV server 23. The telephone interface commonly also provides the majority of the
interactive content as the bandwidth reserved for ITV data in today's TV transmissions is low.
The TV program, along with the retrieved content, is displayed on a television or other display
35 24.

1 One form of interactive TV is interactive game show, which allows a user to play along
with a game show using their ITV receiver. The web site providing the interactive game show
content may also maintain a score for the user, as well as registration and transaction information.
Conventionally, the necessary data for making the game show interactive, as well as received
5 registration and transaction information, is stored at the single, central database so as to be
accessible by all of the web servers. The storage of ITV data in a single central database can lead
to delays, as each server must retrieve data from the same central database.

10 Thus, it would be desirable to have a system and method whereby multiple servers may
accommodate a relatively large number of users over a communications network in a quick and
efficient manner. In addition, it would be desirable to have a system and method that can
dynamically control the particular content based on the users that access the system.

SUMMARY OF THE DISCLOSURE

15 The present disclosure is directed to a system and method for efficiently and quickly
handling content and transaction requests from various users at respective end terminals over a
communications network. According to embodiments of the invention, plural servers are
provided to randomly receive requests from users over a communications network, such as the
Internet. Each server contains a memory, such as a cache or disk storage, that contains a copy
of all data contained on every other server. When a request comes in to one of the servers, that
20 server, in addition to processing the request, broadcasts data corresponding to the request to the
other servers, which are programmed to store the data on their respective local memories. Such
broadcasts may be carried out over a dedicated, private network.

25 Thus, one embodiment of the invention is directed to a system for interacting with end
user ITV terminals over a communications network. The illustrative embodiment includes plural
servers adapted for communication with user terminals over the communications network.
Additionally the plural servers are coupled for communication with each other. An interface to
the plurality of servers operates to receive requests from users and to route the requests to various
servers. Each of the servers is programmed similarly to receive user requests, process the
requests, and broadcast data regarding the processed request to the other servers. The other
30 servers are programmed to store the broadcast data.

BRIEF DESCRIPTION OF THE DRAWINGS

35 The description of the disclosure, described in summary above, can be better understood
with respect to the following specification and claims by reference to the included illustrative
Figures in which like numbers refer to similar elements throughout:

1 Figure 1 is a graphic illustration, which illustrates an exemplary interactive TV system;
Figure 2A is a block diagram of a system according to one embodiment of the invention;
Figure 2B is a block diagram of a system according to another embodiment of the
invention;

5 Figure 3 is a flow chart of the operational steps involved in connection with the overall
system of Figure 2A or Figure 2B;

Figure 4A is a block diagram of an ITV system according to one particular embodiment
of the invention; and

10 Figure 4B is a block diagram of an ITV system according to another particular
embodiment of the invention.

DETAILED DESCRIPTION OF THE DISCLOSURE

As used herein, the term "interactive content" is used to refer to any additional content that
is distinct from the picture and sound of a typical TV program which may be retrieved from some
15 source other than the TV signal itself, and that is intended to be used with a corresponding TV
program to create an enhanced program.

As used herein, the term "ITV receiver" is intended to refer to set-top boxes, digital cable
boxes, personal computers equipped with TV receiving capabilities, or any other suitable device
which has ITV capabilities.

20 As used herein, the designation "terminal" is intended to refer to computers, ITV receivers,
or any other device that can engage in two-way communication over a communications network.

Referring to Figures 2A, request system 30 is operative to handle various requests from
plural end users over a communications network. The request system 30 also illustrates the
system functionality, according to an embodiment of the present invention.

25 System 30 is designed for two-way communication with a plurality of user terminals 25
over a communication network, such as the Internet 21, some other computer network, or any
interface that provides for two-way communication of data. System 30 is designed to receive a
plurality of requests over the Internet 21 using a plurality of nodes (e.g., servers 34) for receipt
of those requests. The Internet Domain Name Service (DNS), provided as a functionality of the
30 Internet, may direct requests to content servers 34 (alternatively referred to as nodes, server
nodes, or servers) using, for example, a round robin selection method. In this manner, the burden
may be shared in generally equal amounts between the respective nodes.

35 In the embodiment illustrated in Figure 2A, the DNS addresses the incoming requests to
a plurality of content servers 34. Commonly, the content servers may comprise HTTP
("hypertext transfer protocol") servers with appropriate software and hardware to provide
database functionality, as described in more detail below. HTTP is a set of standards used by

1 computers to transfer hypertext files (i.e., web pages) over the Internet.

Content servers 34 may be distributed in nature and redundant. Each content server 34 may equivalently provide web content, to user terminals 25, over the Internet 21. In order to minimize latencies in embodiments of the system, modified system software stored at each server
5 may be implemented as operating system functions, and may run in the kernel (i.e., the central module) of a server's operating system.

Each content server 34 may be designed so as to be self-contained, with each server maintaining a copy of all the data necessary for processing incoming requests from any user. In particular, each content server 34 may maintains all the information necessary for transmitting
10 content to a user, processing user registration and log-on information, and user transaction information.

Referring now to Figure 2B, system 30 includes a load balancing system (LBS) 32 that is designed for two-way communication with a plurality of user terminals 25 over a communication network, such as the Internet 21, some other computer network, or any interface
15 that provides for two-way communication of data. LBS 32 is designed to receive a plurality of requests over the Internet 21 and to pick between a plurality of nodes (e.g., servers 34) for receipt of those requests. The LBS may allocate requests to nodes using various schemes, such as for example round robin allocation. In this manner, the burden may be shared in generally equal amounts between the respective nodes.

In the embodiment illustrated in Figure 2B, LBS 32 routes the incoming requests to a
20 plurality of content servers 34. Similar to the illustrated and described system of 2A, the content servers may comprise HTTP servers with appropriate software and hardware to provide database functionality,

Similarly to the system referenced in Figure 2A, the content servers 34 of Figure 2B may
25 be distributed in nature and redundant. Each content server 34 may equivalently provide web content, to user terminals 25, over the Internet 21. In order to minimize latencies in embodiments of the system, modified system software stored at each server may be implemented as operating system functions, and may run in the kernel (i.e., the central module) of the server's operating system. Alternatively the system software may be run entirely as an application outside of the
30 operating system, or a combination of application and operating system function.

Like the system of 2A the content servers 34 of Figure 2B may be designed so as to be self-contained, with each server maintaining a copy of all the data necessary for processing incoming user requests.

In either illustrative embodiment 2A or 2B, content servers 34 may interconnect to each
35 other over a private, back-end network 36. The back-end network 36 is not directly accessible by users via the Internet 21, and thus data and other information can be transmitted over back-end

1 network 36 without the need for encryption. Additionally, since the back end network services
a limited number of content servers, data traffic can be minimized to facilitate the necessary
traffic between content servers. Back-end network 36 connects to each of the content servers 34,
and may connect to one or more other devices, as described in greater detail below. Thus, the
5 transmission of data over private network 36 is performed in a manner transparent to the end
users at the respective terminals 25. Additionally in the system illustrated in Figure 2B the
functions of the back-end network 36 may be programmed into the LBS if desired.

Back-end network 36 may be designed to provide sufficient bandwidth for handling a
large number of servers 34. For example, network 36 may comprise a gigabit Ethernet network.

10 Content servers 34 are designed to handle various tasks based upon the information
received from a user over the Internet 21. For example, the information may be a request for
content, incoming user registration information, user transaction information, or the like.
Content servers 34 are programmed to receive and process such requests, as described in greater
15 detail below.

In addition, content servers 34 are configured in such a manner that each server may
handle any incoming request, without the need to retrieve information from any external source.
Because of this, system 30 may process requests in a fast efficient manner.

20 System 30 may provide multiple redundant servers. Additionally system 30 is modular
and accordingly easily serviced. For example, if the number of user requests escalates to the
point where another server 34 becomes necessary, a new server may be connected to network 36
and a "startup image" of one of the other servers may be copied to the new server, and the
appropriate network addresses programmed. The term "startup image" is used to denote the
25 memory image, commonly on a hard disk, that is present when the system is turned on. The
startup image generally comprises the software, such as operating system and application
programs. Such programs are used for operation of the system and for the performance of the
system as a server. Once the "startup image" of one of the other servers is copied to the new
server and the appropriate network addresses programmed new server is then ready to handle
30 incoming requests. In addition, if one of the existing servers 34 malfunctions, the malfunctioning
server can be repaired or replaced, with the replaced server then receiving a copy of the startup
image from an existing server. Once the proper network addresses are initialized the server is
ready to be brought on-line to process incoming requests.

35 In addition, it will be understood by those skilled in the art that the servers 34 need not be
physically grouped together, but can be spread out over a geographic region. The back-end
network 36 connects the servers 34 together so that they can communicate, even if the servers
34 are physically spread out over a geographic region.

1 Referring now to Figure 3, operation of the system 30 is described in more detail.
Operation begins at step 100, with a request generated at one of the user terminals 25 that is
transmitted via the Internet 21 to system 30. At step 102 one of the servers 34 accepts the user
request. As described above, the routing of incoming requests is commonly done in such a
5 manner so as to balance the load between the respective servers 34. For example, the Internet
DNS may allocate requests to servers in a round-robin fashion, or an LBS may allocate the
request to a particular server. Thus, for a particular incoming request, any server 34 may be
selected to handle the request. The identity of the user terminal 25 from which the request
originated is immaterial to the fulfillment of the requests, as is the particular server 34, which
10 handles it.

Once the request has been routed to the server 34, which will handle the request, operation
proceeds to step 104 and the designated server 34 processes the request. As described above, the
request can take many different forms, such as a request for content (e.g., a video file, an audio
clip, a text document, or the like), a registration-related request, or a transaction request. The
15 server 34 handles the request and performs a corresponding function, such as retrieving content
and transmitting that content to the user terminal 25 over the Internet 21, at step 106.

In the case of a registration or log-in request, server 34 will receive the incoming request
and transmit a query to the user terminal 25 for the necessary information, such as a user name
and password.

20 Once the server 34 has performed the necessary function or functions based on the
received request, operation proceeds to step 108, and the server 34 that processed the request
broadcasts information relating to the request over the back-end network 36, or equivalent. In
the case of a request for content, the broadcast information may simply be an indication that the
particular content was transmitted to the end user.

25 In the case of a user attempting to register with or log onto the system 30, the information
will likely include some information to identify the user terminal. At step 110, the broadcast
information is received by each server 34 and stored in a local cache memory or the like within
each server.

30 A user registering with or logging onto the system 30 will transmit a number of requests,
for example, an initial request to register, followed by additional information as required by
system 30. A different server 34 may receive each request from user terminal 25. By
broadcasting information to the other servers 34 after each server user transaction, a subsequent
request from the user terminal 25 may be processed by any of the servers 34, without the need
for referring to a remote database or to a specific server 34.

35 In the just described embodiment transaction data is broadcast over the back-end network
36. Alternately the transaction information may be transmitted through the LBS, in which case

1 the LBS would be programmed to be responsive to receipt of such information and transmit the transaction information to the plurality of servers 34 (except for the originating server).

5 In this manner, when subsequent requests are received from a user terminal 25, the requests may be routed to any of the servers 34, without the need for the server to access a remote database to process the user request. For example, in the case where a new user just registered with the network using a first server, each server will receive and maintain the registration information. Then, when the user transmits another request and a different server than the first server receives that request, the current server can process the request without the need for accessing either a remote database or the first server. Likewise, either the first server, or any of
10 the other plurality of servers can efficiently handle subsequent requests from the user.

As is shown in Figures 2A and 2B, system 30 includes a remote, off-line database 38 that is connected to the back-end network 36 for receiving, processing, filtering, or accumulating communications from the respective servers 34. The database 38 may be used to generate end user reports and perform other non real-time functions so as to relieve the burden on the servers
15 34 and allow the servers 34 to process the real-time transactions. By being connected to the back-end network 36, database 38 receives broadcast information for processing. Alternately the remote database in Figure 2B may be accessed using a connection 33 instead of using a connection 35, thus potentially eliminating the need for the back end network 36.

20 Thus, database 38 may maintain the same content as the servers 34, but since it will not generate broadcast messages to the servers, it is not necessary for the real-time operation of system 30. Rather, database 38 handles the functions that are not needed for the real-time interactive functionality of system 30.

Referring now to Figure 4A, a system 200, according to another embodiment of the invention, is illustrated. System 200 is designed to process interactive content-related requests
25 from various ITV receivers 20. As described above, in an interactive content environment, interactive content (i.e. "ITV" data) may be embedded into a TV signal by a content encoder 12. Content encoder 12 receives a TV signal from a data player 16 and embeds ITV data provided to it in the TV signal, thus producing a signal modified by the inclusion of ITV data. The modified signal is then broadcast by a broadcast station 18, and received by antenna 19 and
30 forwarded to the ITV receivers 20. The ITV data is extracted from the TV signal, processed by the respective receivers 20 and, when an appropriate request is made, is then transmitted over the Internet to an interactive content provider, for example, system 200.

35 ITV data can take many different forms. For example, the ITV data can be a URL link that is utilized by the ITV receivers 20 to access a corresponding web site. Alternatively, the ITV data can be a trigger or other command, which commands the ITV receiver to retrieve or display some interactive content. In the situation where the ITV receiver is commanded to retrieve or

1 display some interactive content, receiver 20 may be programmed to access a particular web site
or other information provider, and to transmit a request for content, as described in greater detail
below.

5 System 200 operates similarly to system 30. A request from one of the receivers 20 is
received by one of the servers 34. In an interactive content environment, the requests will be for
interactive content, transaction-related requests, log-on and registration requests, and the like.
The server 34 handles the request, transmits appropriate data back to the receiver 20, and then
broadcasts information relating to the request to the other servers 34, over back-end network 36.
Each of the servers 34, as well as database 38, receives the broadcast data and copies the data to
10 their local memories.

In one illustrative embodiment, system 200 also maintains a number of processes for
performing various functions based upon the requests received from users. For example, system
200 may include a logging and accounting "process" 202, a transaction process 204, and a
threshold-monitoring process 206. Each "process" may be a task running on a single machine,
15 or each "process" may be a task running on separate machines.

The logging and accounting process 202 is coupled to the back-end network 36, and
monitors data that is broadcast over network 36 for particular transaction activity, for example
user registration information. Also, process 202 may keep track of the number of users currently
participating in a particular interactive program, or other such information.

20 Transaction processing process 204 is connected to the back-end network 36, and
monitors the broadcast data for end user requests relating to credit card information, purchase
requests, orders, and the like. Transaction processing process 204 is operative to record such
information and to deliver the information to the appropriate third party or parties, such as
merchants and credit card companies.

25 Threshold monitoring process 206 monitors the broadcast data for some significant event,
such as a certain number of participants currently participating in an interactive program, or a
user who achieves a certain score in an interactive game show, or the like. When such an event
occurs, process 206 may transmit a corresponding signal over a frame relay line 208 to content
encoder 12 to alert content encoder 12 of the event. Frame relay line 208 may be a virtual private
30 channel ("VPC") to ensure rapid delivery of the information to content encoder 12.

In addition, threshold monitoring process 206 can monitor the users currently interacting
with a certain program, and can control the content encoder 12 to encode certain ITV data in the
TV signal based on demographic information relating to those particular users. For example,
based on the current users viewing an interactive program and their corresponding demographic
information, a particular advertisement may be applicable for presentation to those users.
35 Content encoder 12 can embed corresponding ITV data relating to the advertisement in the TV

1 signal, with receivers 20 receiving the ITV data and retrieving and displaying the desired advertisement.

Referring now to Figure 4B, a system 200, according to yet another embodiment of the invention, is illustrated. System 200 is designed to process interactive content-related requests from various ITV receivers 20 in a manner similar to the system illustrated in Figure 4A. ITV data may be embedded into a TV signal by a content encoder 12. Content encoder 12 receives a TV signal from a data player 16 and embeds the ITV data provided to it in the TV signal, thus producing a signal modified by the inclusion of ITV data. The modified signal is then broadcast by a broadcast station 18, and received by antenna 19 and forwarded to the ITV receivers 20. The ITV data is extracted from the TV signal, processed by the respective receivers 20 and, when an appropriate request is made, is then transmitted over the Internet to an interactive content provider, for example, system 200.

System 200 of Figure 4B operates similarly to system 200 of figure 4A, and a from a user perspective they may produce equivalent results. A request from one of the receivers 20 is received by LBS 32 and routed to one of the servers 34. Once the user requests have been routed to content servers 34 the system of Figure 4B may proceed exactly the same manner as the system of figure 4A, except that LBS 32 may be programmed to assume the function of network connection 38. In such a case LBS 32 may be connected by a connection 39 to Database 38, Logging and Accounting process 202, transaction processing process 204 and threshold monitoring process 206, and network 36 may be eliminated. LBS 32 may be programmed to contain database 38 and any or all of processes such as 202, 204 and 206.

In the example embodiments, the system 30 operates in connection with the Internet 21. However, it is not limited to such and embodiments of the invention may be used in connection with different communications networks, such as a local area network (LAN), wide area network (WAN), or any other mechanism that allows for two-way communication of data.

In one embodiment, the ITV data is embedded in the vertical blanking interval ("VBI") channel of the program. However, it will be apparent to those skilled in the art that the ITV data can be inserted in any suitable manner into the TV signal, such as in a supplemental data channel.

From the foregoing, it will be apparent that the present invention provides an efficient system for processing requests received from users over a communication network. The system is modular, as additional servers can be easily added to the system by simply copying the data stored at any of the other servers to the new server, and providing the necessary network addresses.

While the above description contains many specific features illustrating the invention, these should not be construed as limitations on the scope of the invention, but rather as one exemplary embodiments thereof. Many other variations are possible given the tracking herein.

1 Accordingly, the scope of the invention should be determined not by the embodiments illustrated,
but by the appended claims and their legal equivalents.

5

10

15

20

25

30

35

1 **CLAIMS**

What is claimed is:

- 5 1. A system for interacting with end user terminals over a first communications network, the system comprising:
- a plurality of servers coupled to receive communication from the end user terminals over the first communications network;
- an interface disposed between the plurality of servers and end user terminals, the interface being operative to receive requests from the end user terminals and to distribute the requests to the plurality of servers;
- 10 a second communication network coupled to provide communication between the servers in the plurality of servers;
- a first computer program segment resident in at least one of the plurality of servers wherein said program:
- 15 receives a request from an end user terminal,
- process the request, and
- broadcasts data regarding the processed request to the other servers,
- a second computer program segment resident in at least one of the plurality of servers wherein the said program stores data broadcast from at least one other server.
- 20 2. The system of claim 1, wherein the first program segment broadcasts data over the second communication network to the second program segment.
3. The system of claim 2, wherein the second communications network comprises an Ethernet network.
- 25 4. The system of claim 3, wherein the second communications network comprises a gigabit Ethernet network.
5. The system of claim 1, wherein the end user terminals comprise ITV receivers, and wherein the requests from the end user terminals are requests from the ITV receivers to retrieve and transmit interactive content to the ITV receivers.
- 30 6. The system of claim 1, further including a database for permanent storage of the data relating to processed requests.
- 35

1 7. The system of claim 6, wherein the database is coupled to the second
communications network.

5 8. The system of claim 1, wherein the interface disposed between the plurality of
servers and end user terminals further includes means for routing incoming requests to the
respective servers.

 9. The system of claim 8, wherein the means for routing comprises the Domain Name
Server function of the Internet.

10 10. The system of claim 8, wherein the means for routing comprises a load balancing
system (LBS).

15 11. The system of claim 2, further including a process coupled to the second
communications network, wherein the process is programmed to monitor the network for
instances of specific transactions.

20 12. The system of claim 11, wherein one of the process comprises a threshold
monitoring process coupled to a content encoder, wherein the threshold monitoring process is
programmed to process data transmitted over the second communications network, determine
that a threshold has been exceeded, and to transmit a corresponding notification to the content
encoder.

25 13. The system of claim 12, further including a frame relay line connected to the
threshold monitoring process and the content encoder to transmit information there between.

 14. The system of claim 11, wherein the process comprises a transaction processing
process.

30 15. A method of interacting with user terminals over a communications network,
comprising:

 receiving a request from a user terminal;

 allocating the request to one of a plurality of servers;

 processing the request at one of the plurality of servers;

35 transmitting data relating to the request to the other servers in the plurality of
servers; and

1

storing the data relating to the request at each other server.

16. The method of claim 15, wherein transmitting data is performed over a private network.

5

17. The method of claim 15, wherein transmitting data is performed in a LBS.

18. The method of claim 17 wherein the LBS, which transmits data, distributes requests to the plurality of servers.

10

19. The method of claim 15, wherein allocating the request uses a round robin allocation to distribute the load over the plurality of servers.

15

20. The method of claim 15, wherein forwarding the request further comprises performing a load analysis to distribute the incoming requests over the plurality of servers.

21. The method of claim 15, wherein processing the request comprises retrieving and transmitting interactive content to an interactive television receiver.

20

22. The method of claim 15, further comprising monitoring the data relating to the request at each server.

25

23. The method of claim 22, further comprising:
detecting a threshold from the monitored data;
providing an indication of detection of the threshold to a content encoder;
encoding the indication of detection of the threshold; and
providing the encoded indication of reaching the threshold to at least one ITV receiver.

30

24. The method of claim 23 wherein detecting a data threshold comprises detecting a certain number of users.

35

25. The method of claim 24 wherein encoding the indication of detecting the threshold comprises placing an indication of detecting the threshold within a video signal to be provided to an ITV receiver.

1 26. A system for interacting with end user terminals over a communications network,
the system comprising:

5 plural servers adapted for communication with the respective terminals over the
communications network, wherein the servers are connected for communication with the other
respective servers;

 an interface connected to the respective servers and operative to receive requests from the
users and to route the requests to the respective servers; and

10 wherein each of the servers is programmed to receive a request from one of the servers,
process the request, and broadcast data regarding the processed request to the other servers, and
wherein the servers are each programmed to store the broadcast data in respective local
memories.

15 27. The system of claim 26, further including a back-end network connected to each
of the servers, and wherein the servers are programmed to broadcast the data over the back-end
network.

20 28. The system of claim 27, wherein the terminals comprise ITV receivers, and wherein
the servers are responsive to requests from the ITV receivers to retrieve and transmit interactive
content to the terminals.

25 29. The system of claim 26, further including a database for storage of the data relating
to processed requests.

30 30. The system of claim 26, further including a plurality of processes connected to the
back-end network, wherein each process is programmed to monitor the network for certain data
and to process the appropriate data.

35 31. The system of claim 31, wherein one of the processes comprises a threshold
monitoring process connected to a content encoder, wherein the threshold monitoring process
is programmed to process data transmitted over the back-end network, determine that a threshold
has been exceeded, and to transmit corresponding data to the content encoder.

 32. A method of interacting with end user terminals over a communications network,
comprising:

35 receiving a request from a user terminal;
 forwarding the request to one of a plurality of servers;

1

processing the request at the one server;
transmitting data relating to the request to the other servers; and
storing the data at each server.

5

33. The method of claim 32, wherein transmitting data is performed over a private network.

10

34. The method of claim 32, wherein forwarding the request is done in a random manner to distribute the load over the plurality of servers.

15

35. The method of claim 32, wherein processing the request comprises retrieving and transmitting interactive content to an interactive television receiver.

20

25

30

35

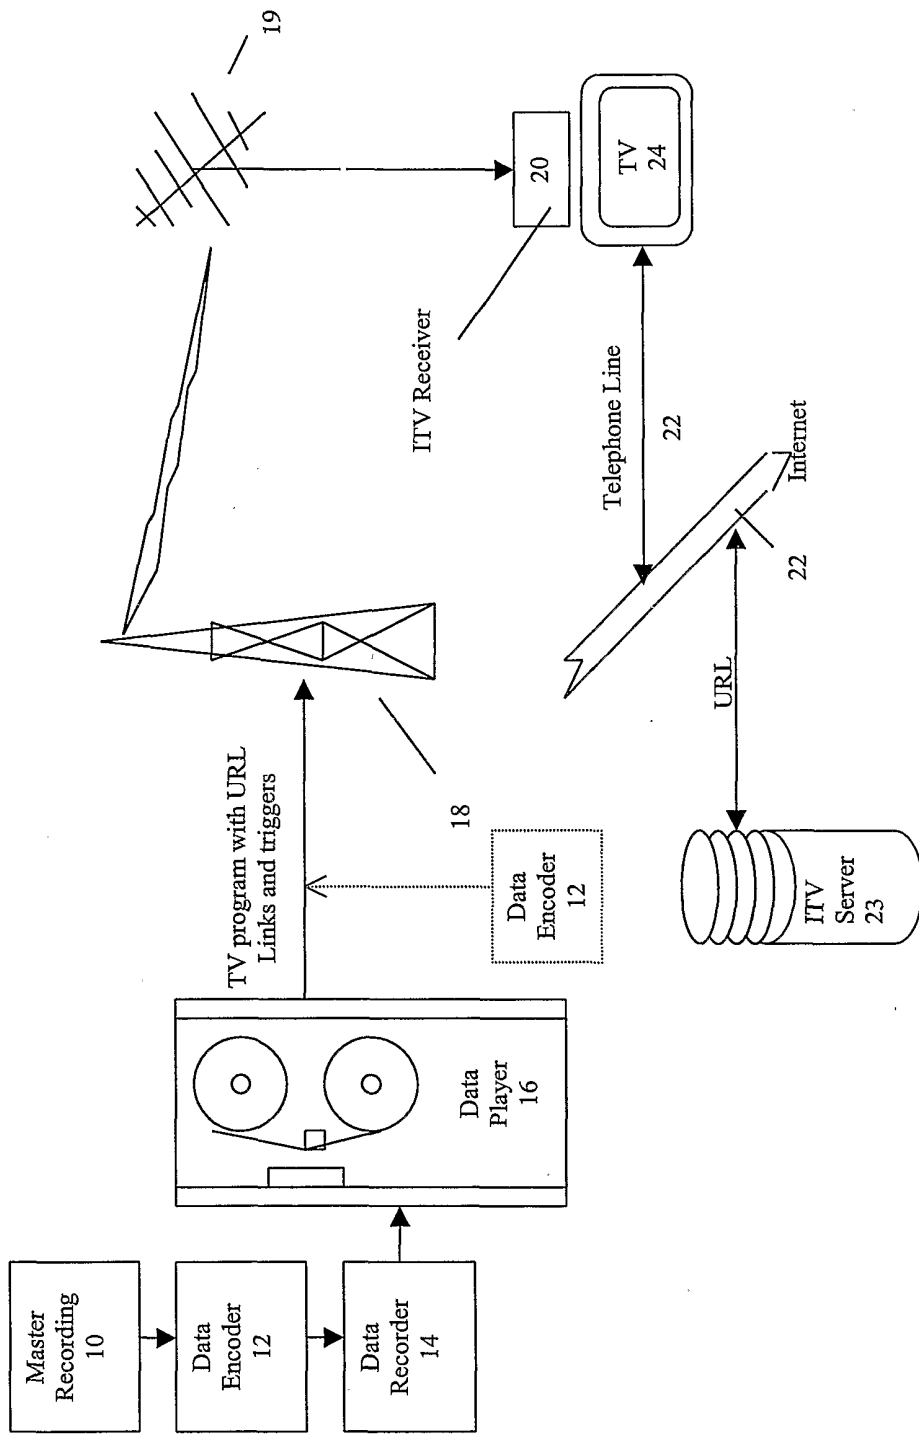


Figure 1

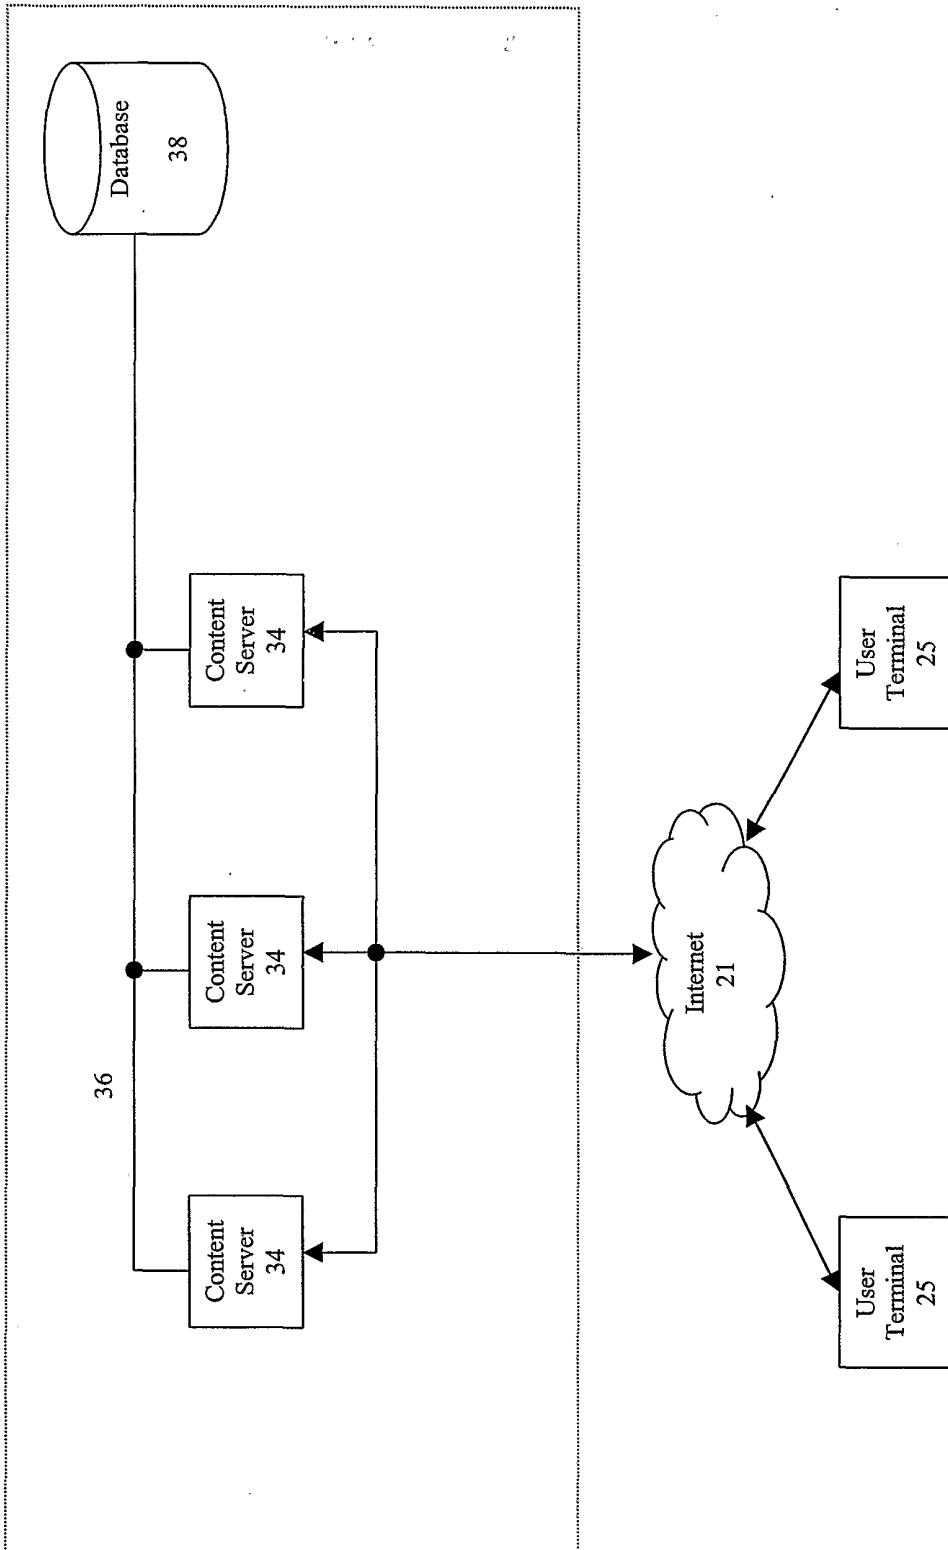


Figure 2A

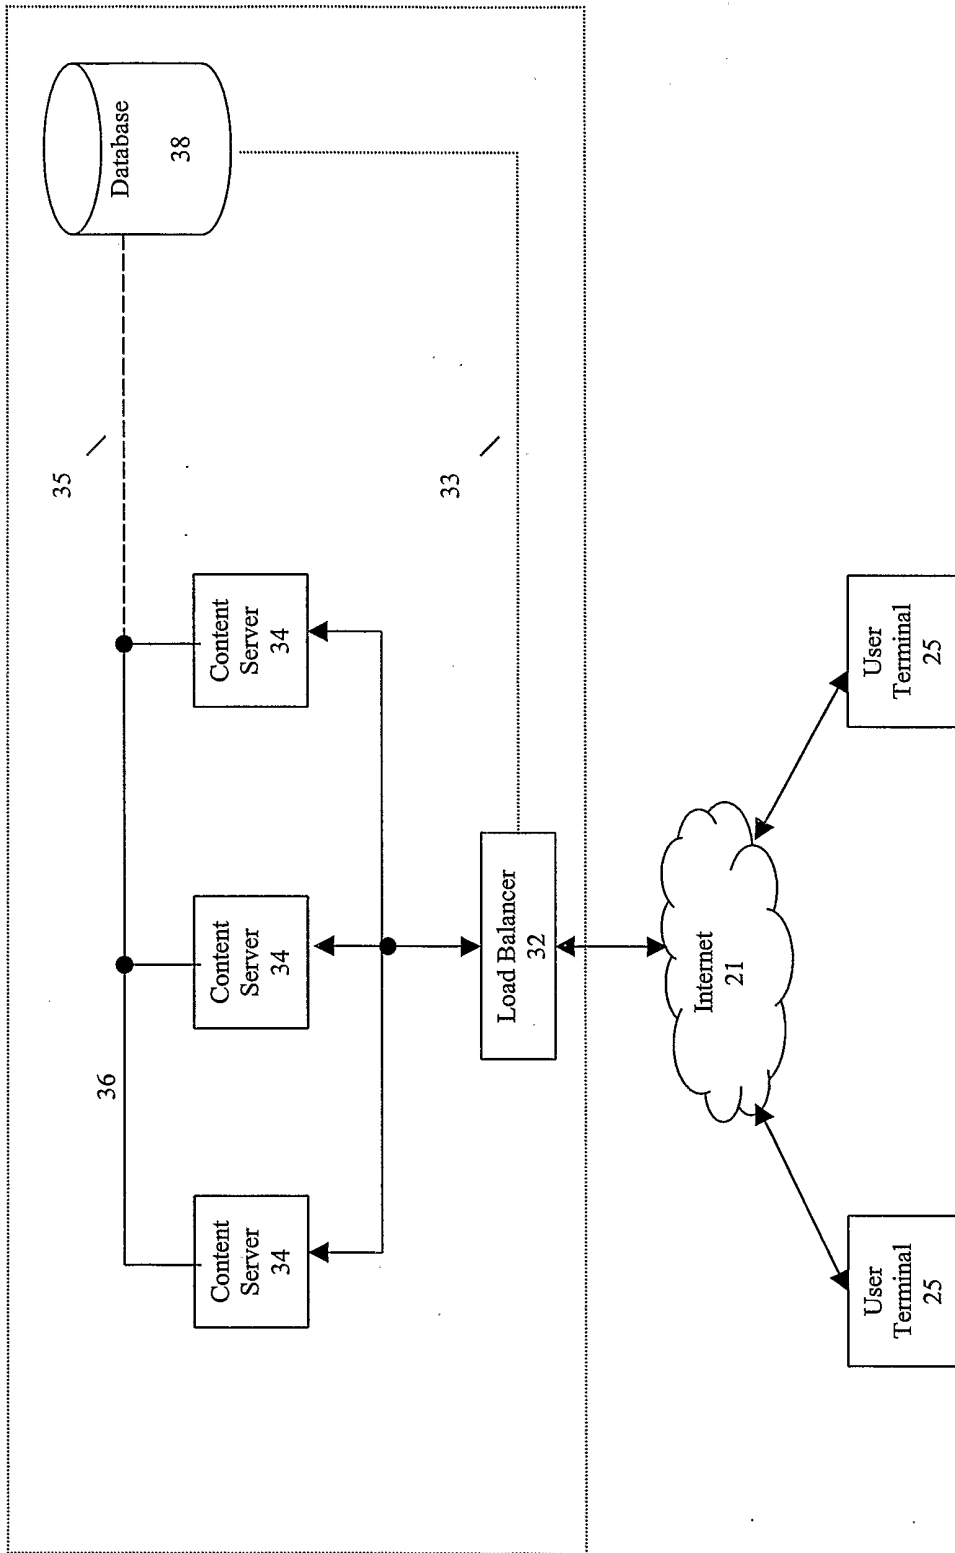


Figure 2B

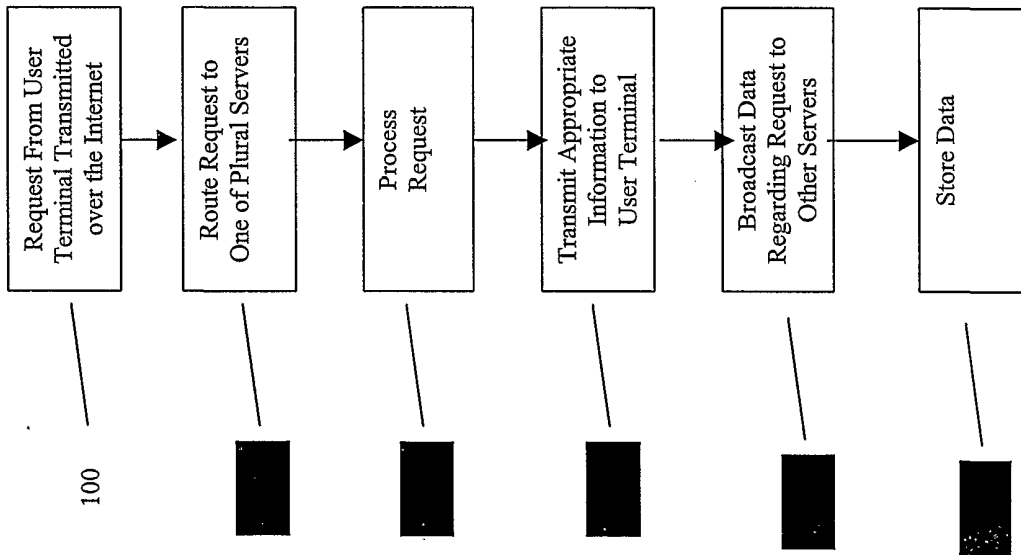


Figure 3

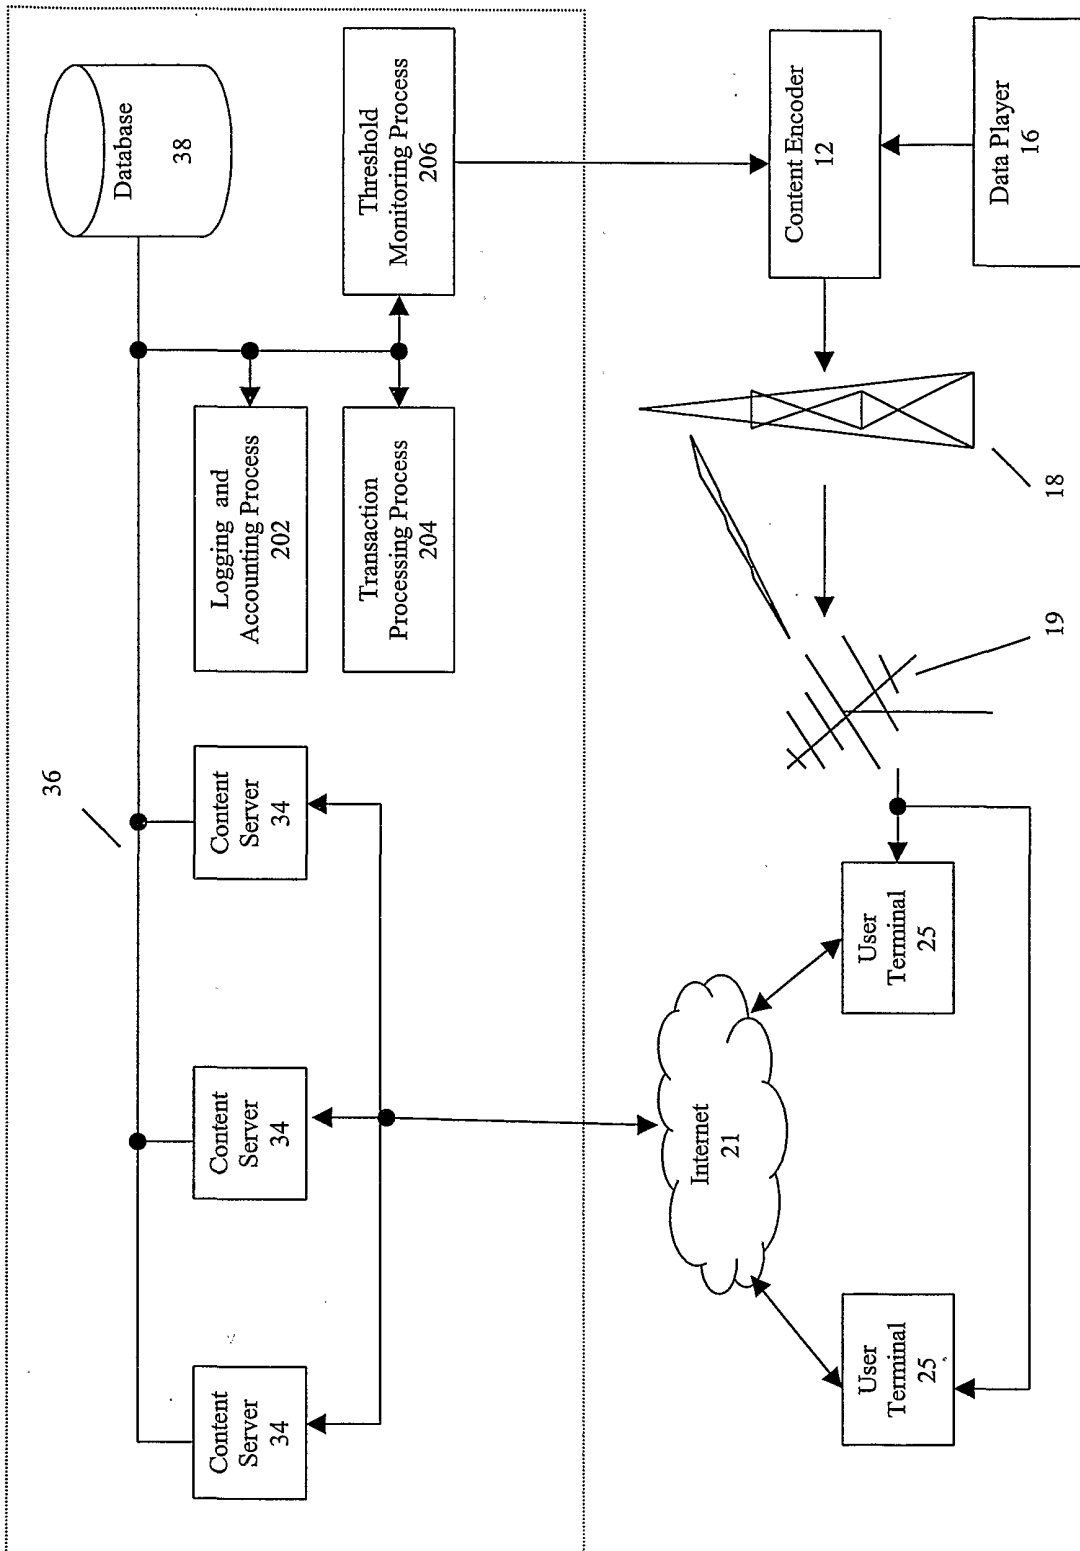


Figure 4A

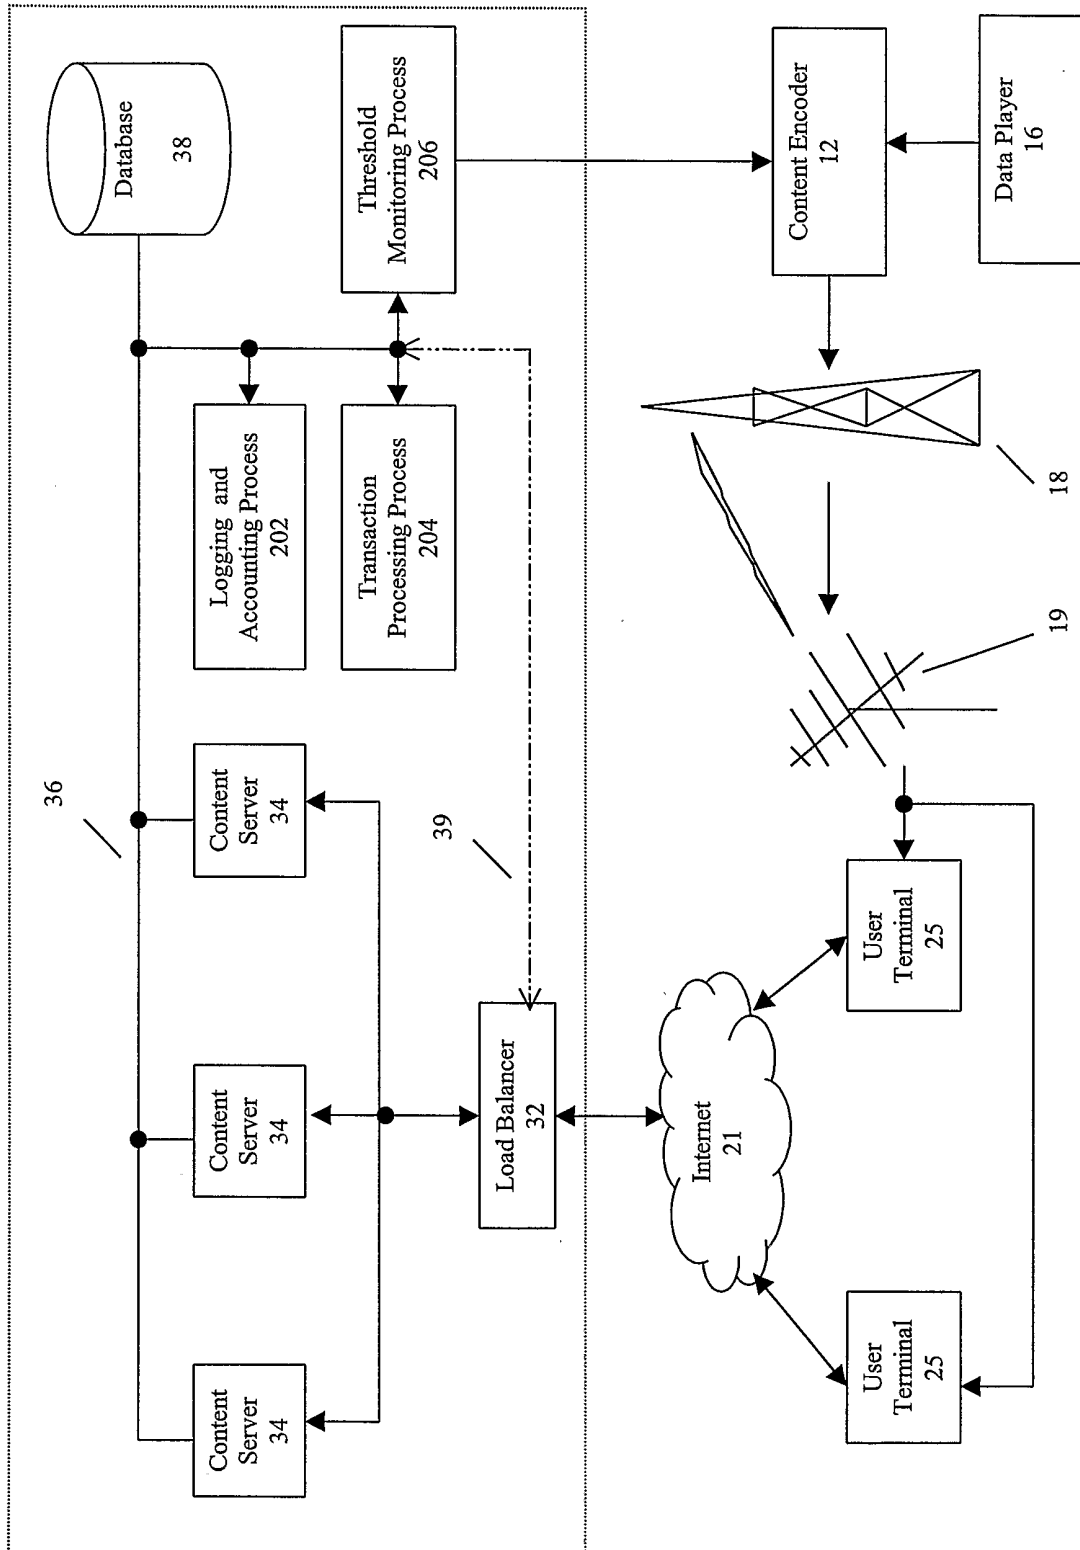


Figure 4B

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US01/27313

A. CLASSIFICATION OF SUBJECT MATTER

IPC(7) :H04N 7/173

US CL :725/87, 91; 709/219

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 725/86, 87, 91, 92, 93; 709/217, 218, 219

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5,867,657 A (BOLOSKY et al) 02 February 1999, see whole document.	1-35
A	US 5,815,146 A (YOU DEN et al) 29 September 1998, see whole document.	1-35
A	US 5,559,764 A (CHEN et al) 24 September 1996, see whole document.	1-35

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier document published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"G" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

04 NOVEMBER 2001

Date of mailing of the international search report

15 FEB 2002

Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

JOHN W. MILLER

Telephone No. (703) 305-4795