

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(10) International Publication Number
WO 2013/160482 A1

(43) International Publication Date
31 October 2013 (31.10.2013)

- (51) **International Patent Classification:**
C08K 5/205 (2006.01) *B60C 1/00* (2006.01)
C08L 21/00 (2006.01)
- (21) **International Application Number:** PCT/EP2013/058828
- (22) **International Filing Date:** 28 April 2013 (28.04.2013)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:** 12165832.2 27 April 2012 (27.04.2012) EP
- (71) **Applicant:** CYTEC SURFACE SPECIALTIES GER-
MANY GMBH [DE/DE]; Rheingaustraße 190 .. 196,
65203 Wiesbaden (DE).
- (72) **Inventor; and**
- (71) **Applicant (for US only):** SCHÄFER, Ralph [DE/DE];
Mecklenburger Straße 55, 65205 Wiesbaden (DE).
- (74) **Agents:** DECKERS, Hellmuth Alexander et al.; Kanzlei
Dr. Deckers, Breitbachstraße 15, 55218 Ingelheim Am
Rhein (DE).
- (81) **Designated States (unless otherwise indicated, for every
kind of national protection available):** AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU,
RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ,
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA,
ZM, ZW.
- (84) **Designated States (unless otherwise indicated, for every
kind of regional protection available):** ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).
- Published:**
— with international search report (Art. 21(3))



WO 2013/160482 A1

(54) **Title:** RUBBER COMPOSITIONS

(57) **Abstract:** The invention relates to a rubber composition comprising a rubber and a processing additive wherein the processing additive is a functional reactive diluent having at least one functional group in the molecule which is not an olefinic unsaturation, to a process of compounding such rubber compositions, and to the use thereof.

Rubber Compositions

5

Background of the Invention

The invention relates to rubber compositions comprising a rubber compound and a processing additive, to a method of preparation thereof, and to a method of use of such rubber compositions in mechanical rubber goods, particularly in tyres.

10

Many various chemicals, usually referred to as "Rubber Chemicals and Additives", are used in manufacturing of rubber-elastic materials. They serve to simplify and facilitate the compounding process, to control the elastomer properties of the compounded rubber material, and to protect the material during compounding, and thereafter as finished product, from deterioration. Among these are vulcanisation chemicals which support crosslinking of the rubber, particularly sulphur, sulphur donors, and peroxides, activators such as zinc oxide, and accelerators such as sulphenamides, thiazoles, thiurams, and dithiocarbamates. Hardness of the rubber compound can be influenced by fillers, among which carbon black and the so-called white fillers, mainly silica, calcium carbonate, and kaolin are noted.

15
20

If carbon black is used to increase the hardness of a rubber composition, the viscosity of the rubber mixture is also largely increased which adversely affects the mixing process. Plasticisers are used in such case to reduce the viscosity, mostly mineral oils, the so-called process oils. However, mineral oils remaining in the ready-made rubber compound reduce the hardness and stiffness. It is therefore an object of the invention to provide a replacement for process oils that is able to reduce the viscosity of the rubber composition during mixing, but does not lead to lower hardness and stiffness of the rubber composition, and of vulcanised parts made therefrom. Particularly, it is desired to provide a replacement for process oils that allow to make mechanical rubber goods with a high stiffness and bending strength.

25

30

Such strength and stiffness are particularly needed in the apex region of tyres which is a part of the bead area of a tyre which also ensures the seating of the tyre on the rim.

Summary of the Invention


5 The so-called "liquid natural rubber" grades which are high molar mass compounds derived from natural polyisoprene, having a glass transition temperature of - 65 °C and being available in different viscosities ranging from 35 Pa·s to 400 Pa·s measured at 38 °C, have been used as plasticisers to lower the processing viscosity of rubber compounds, and are co-
10 vulcanised with these. These plasticisers do, however, not increase the strength and stiffness of rubber compounds obtained with their aid beyond the values obtained with a non-plasticised rubber compound. It was therefore an object of the invention to provide plasticisers that reduce the viscosity of a rubber formulation during compounding, but do not lower the strength and stiffness of the vulcanised rubber compound.

15 This object has been achieved by replacing at least a part of the mineral oils used as compounding aid or plasticiser by functional reactive diluents that serve as solvent or plasticiser during the initial part of the rubber mixing and compounding process, but co-react with at least one constituent of the rubber composition during compounding and vulcanisation by virtue of functional groups in their molecules which are not an olefinic
20 unsaturation. The compounding process is thereby improved in the way that the viscosity, and hence, the energy consumption, during mixing and compounding is reduced at least in the first part of the compounding process. Care has therefore to be exercised that the reactive diluent does not enter into premature reactions with other constituents of the rubber mixture. The functional reactive diluents according to this invention are
25 characterised by the presence of at least one functional group in the molecule of the said functional reactive diluent which is not an olefinic unsaturation, and which is preferably selected from the group consisting of an epoxide group, an aziridine group, an N-alkylolamide group, an N-alkoxyamide group, an isocyanate group, a carbodiimide group, and electron withdrawing groups such as a nitro group, or an oxo acid group or derivatives

thereof, particularly a carboxyl, a carboxylic acid anhydride, a carboxylic ester, or acyl halogenide group, and an activated olefinically unsaturated group which is activated by at least one neighbouring carboxyl, carboxylic acid anhydride, or acyl halogenide group.

5 For the purpose of this invention, such activated olefinically unsaturated groups are considered different from a usual olefinic unsaturation, and are therefore not encompassed in this expression.

"Olefinic unsaturation" as used herein therefore is a group

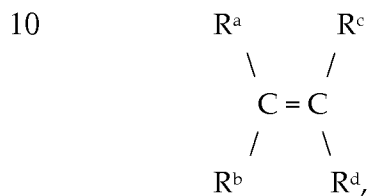


15

where R^a, R^b, R^c and R^d are selected from the group consisting of a hydrogen atom, and an organic radical where the carbon atom in this organic radical bound to either of the two carbon atoms shown in the above formula does not carry a double bond, and is not connected to an atom which is neither carbon nor hydrogen.

20

The preferred functional groups have as structural elements the following:

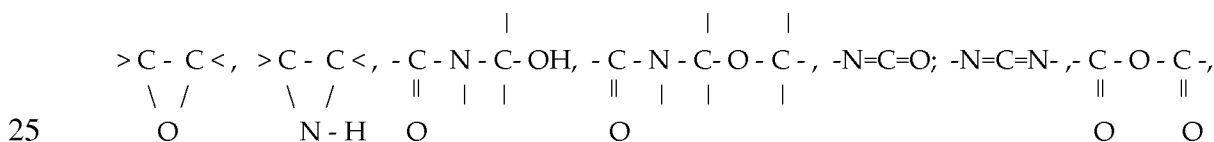


-CO-OH, or -CO -Hal, and also including an activated olefinically unsaturated group as explained supra.

30

Particularly preferred are reactive diluents having at least one of the following groups:

- N-methylol carbamate groups of formula R-O-CO-NX-CHR'-OH,
- dimethyl ether structures of formula R-O-CO-NX-CHR'- O - CHR'-NX-CO-O-R,
- and methylene-biscarbamate groups, having a structure



5

10

which are adducts made from carbamates R-O-CO-NH₂, as detailed supra, and aldehydes R'CHO. These adducts reduce the viscosity of the rubber compound mixture, but subsequently co-react with the rubber materials during vulcanisation. It is also preferred to use oligomeric or polymeric molecules having at least one of the groups mentioned.

Detailed Description of the Preferred Embodiments

The most preferred reactive diluents are adducts AC of aliphatic aldehydes A and carbamates C.

15

20

Most useful carbamates C for the invention are esters of monohydric or polyhydric alcohols and carbamic acid, of formula R(-O-CO-NHX)_n, where R is an aliphatic monovalent (n=1) or polyvalent (n>1) radical having from one to thirty carbon atoms, and may be linear, branched, or cyclic, or a mixed aliphatic-aromatic mono- or polyvalent radical having from six to thirty carbon atoms, wherein only aliphatic carbon atoms bear the oxycarbonylamino group -O-CO-NHX. Mixtures of these carbamates may also be used. The carbamates of formula R(-O-CO-NHX)_n can preferably be derived from linear alkyl radicals, or branched alkyl radicals, or cyclic alkyl radicals. It is also possible to use aralkyl radicals as radical R, such as benzyl, 2-phenylethyl, and α,α-dimethylbenzyl radicals. Preferred are n-propylcarbamate, isopropyl carbamate, n-butyl carbamate, isobutyl carbamate, sec.-butyl carbamate, tert.-butyl carbamate, n-pentyl carbamate, n-hexyl carbamate, n-octyl carbamate, 2-ethylhexyl carbamate, decyl- and isodecyl carbamate, tridecylcarbamate, and mixtures of these.

25

30

Dicarbamates H₂N-CO-O-R''-O-CO-NH₂ derived from dihydric alcohols such as ethylene glycol and 1,4-butanediol, with R'' being an alkylene diradical having from two to forty

carbon atoms can also be used, preferably in combination with monocarbamates.

Addition of aliphatic aldehydes A of formula R'-CHO to the carbamates C as mentioned supra yields N-alkylol compounds AC, in the case of monocarbamates represented by
 5 formula R-O-CO-NX-CHR'-OH which can also be etherified with alkanols to form N-alkoxyalkyl compounds.

These adducts, again in the case of a monocarbamate, have at least one structural element selected from

- 10 - N-methylol carbamate groups of formula R-O-CO-NX-CHR'-OH,
 - dimethyl ether structures of formula R-O-CO-NX-CHR'-O-CHR'-NX-CO-O-R,

- 15 - an N-alkyleneamide structure of formula R-O-CO-N $\begin{array}{l} \text{CHR}'''-\text{Y} \\ / \\ \backslash \\ \text{CHR}''-\text{Z} \end{array}$


20 where R'' and R''' may independently from each other be H or an alkyl of from 1 to 8 carbon atoms, or an aryl of from 6 to 20 carbon atoms, and Y and Z may independently from each other be -O- or -N<, and methylene-biscarbamate groups, having a structure

- 25 $\begin{array}{l} \text{H} \\ \backslash \\ \text{C}(\text{NX-CO-OR})_2 \\ / \\ \text{R}' \end{array}$

30 and are adducts made from carbamates R-O-CO-NH₂, as detailed supra, and aldehydes R'CHO.

The entity X can be a hydrogen atom, or an alkylol group derived from an aldehyde, such as

-CH₂OH if derived from formaldehyde, or -CH(R')OH if derived from an aliphatic aldehyde of formula R'-CHO, or a further structure



These carbamate-aldehyde resins AC are preferably oligomeric or polymeric in nature, i. e. they contain at least three, and up to nine (referred to as "oligomeric" in the connection of this invention) or at least ten (referred to as "polymeric" in the connection of this invention) repeating units per molecule.

Rubber compounds modified with reaction products AC based on alkyl carbamates and aldehydes are particularly suited for the production of tyres. They have the important and unexpected property that they act as diluent during the compounding phase, by lowering the viscosity of the composition, and thus facilitating the mixing and kneading process, but take part to at least a small extent, in the crosslinking reactions in the rubber compound, and thus enhance the mechanical properties such as shear strength, bending strength, and tear strength, the corresponding moduli, and the elasticity.

Other functional reactive diluents having at least one epoxide group are preferably liquid epoxide functional compounds, such as epoxidised fatty acids or esters thereof, epoxidised oils such as epoxidised soy bean oil, glycidyl ethers or polyhydric alcohols such as butanediol diglycidyl ether and hexanediol diglycidyl ether, glycidyl ethers of glycerol, trimethylolpropane and pentaerythritol, and glycidyl ethers of oligomeric glycols such as oligomeric propylene glycol and oligomeric ethylene glycol, and also epoxy resins based on bisphenol A, bisphenol F, mixtures of these, and also particularly preferably, liquid epoxy resins based on novolaks. These epoxy resins are oligomeric or polymeric in nature, i. e. they contain at least three (oligomeric) or at least ten (polymeric) repeating units per molecule.

They can be cured preferably during the vulcanisation of the rubber through addition of customary curing agents for epoxy resins, preferably by addition of aminic curing agents. These resins also impart additional strength and stiffness to the rubber compound, as does the reactive diluent based on adducts of carbamates and aldehydes.

5

Further functional reactive diluents comprise aziridine functional compounds having at least one aziridine group per molecule, particularly those derived from alkoxyated polyhydric alcohols which are esterified with olefinically unsaturated acids such as acrylic or methacrylic or vinylacetic acid. These aziridines can react with active hydrogen , particularly in the form of carboxylic acid groups. This reactive diluent is particularly useful in chlorinated rubber having also carboxylic acid functionality, referred to as CRACA, as described by Shelby F. Thames and Z. Alex He in Industrial Crops and Products, vol. 2 (1994), pages 83 to 88.

10

15

It is also possible to add, as functional reactive diluents, compounds having at least one isocyanate group in a molecule, preferably two or more, preferred isocyanates being trimerisation products of diisocyanates such as the isocyanurate made from hexamethylene diisocyanate (N,N',N''-tris-(6-isocyanatohexyl)-1,3,5-triazine-2,4,6-trione), and the isocyanurate of toluylene diisocyanate. Such reactive diluents are particularly useful in hydroxyfunctional rubber compounds such as compounds comprising hydroxyl-terminated styrene-butadiene rubber, and hydroxyl-terminated acrylonitrile-butadiene rubber, and diene rubber grades having hydroxyfunctional groups as described, e. g., in WO 29000/068 311 A1.

20

25

Further functional reactive diluents are compounds comprising at least one carbodiimide group per molecule, these are also able to react with carboxylic acid groups present in the rubber compound.

A still further functional reactive diluent class are molecules, preferably oligomers and

polymers, having at least one olefinically unsaturated group which is activated by at least one neighbouring carboxyl, carboxylic acid anhydride, or acyl halogenide group. In contrast to the liquid rubber materials described supra, they provide additional crosslinking sites in addition to co-vulcanisation which takes advantage of the presence of olefinic unsaturation in the functional reactive diluents, by virtue of the activating groups which can react with amine, hydroxyl, and mercapto functionalities in the rubber compound and thus lead to an increased crosslinking density, and hence, improved mechanical properties. Useful functional reactive diluents of this class are oligomeric unsaturated oils which are at least partially grafted with unsaturated acid anhydrides such as maleic anhydride and tetrahydrophthalic anhydride, or grafted with olefinically unsaturated acids such as acrylic acid, vinylacetic acid, or with unsaturated acid chlorides such as acryloyl chloride.

It is possible to entirely replace the mineral oil component by the functional reactive diluents according to the invention, but it is also within the scope of this invention to use mixtures having a mass fraction from 1 % to 99 % of one or more functional reactive diluents according to this invention, and from 99 % to 1 % of mineral oil.

It has further been found, in the course of the investigation leading to the present invention, that the presence of phenolic reinforcing resins, in particular those of the novolak type which are subsequently cured with formaldehyde releasing substances such as hexamethylene tetramine or methylolated melamine, in combination with the aldehyde-urethane adducts AC, leads to still further enhanced hardness and stiffness. It is therefore particularly preferred to use both phenolic reinforcing resins and the aldehyde-carbamate resins AC, preferably as separate additions.

The invention is further described in the following examples.

Examples**Example 1**

A resin based on n-hexylcarbamate and formaldehyde was made according to the following procedure:

5 Example 1.1 *n-Hexyl Carbamate*

14.45 kg of n-hexanol were charged into a reaction vessel equipped with a stirrer, a thermometer, a nitrogen inlet, and a dropping funnel. 1.2 g of a commercial dibutyltin oxide (Fascat 4100, Elf-Atochem) and 6.0 kg of urea were added, and the resulting mixture was heated to reflux (160 °C). The reaction was continued for five hours, and reflux was
10 maintained by reducing the pressure. The mass fraction of residual urea in the reaction mixture had fallen to 1.0 %. After separation of the excess hexanol by distillation under reduced pressure, a clear melt of n-hexyl carbamate (CAS-No. 2114-20-7) was obtained which solidified at 55 °C.

15 Example 1.2 *Adduct Resin of n-Hexyl Carbamate and Formaldehyde*

The carbamate of n-hexanol made in Example 1.1 was melted to 95 °C in a reaction vessel, and 11 kg of an aqueous solution of formaldehyde having a mass fraction of formaldehyde of 37 % was added over thirty minutes under stirring, and cooling to 60 °C. When this temperature was reached, 90 g of an acid ion exchange resin (®Amberlyst 15 dry, sulphonic
20 acid-functional reticulated resin based on styrene-divinylbenzene copolymers, The DOW Chemical Co.) were added, and the vessel was deaerated by evacuation-nitrogen purge cycles. The contents of the vessel were then heated up to 95 °C, taking advantage of the exothermic reaction, held at that temperature for one hour, whereupon the temperature was slowly increased up to 135 °C to distil off the remaining water. The viscosity of the
25 remaining pale yellow resin was 8.9 Pa·s, measured at 70 °C at a shear rate of 25 s⁻¹. A mass fraction of 0.08 % of remaining formaldehyde was determined in the resin.

Example 2**Example 2.1 Base Rubber Mixture**

A base rubber mixture was prepared by intimately mixing, in a Z-arm kneader, 100 kg of SMR (Standard Malaysian Rubber) and 60 kg of carbon black granules (type N 326, having a bulk density of 455 kg/m³) for three hours at a temperature between 120 °C and 160 °C.

Example 2.2 Test Rubber Compounds

16 kg samples from this base rubber mixture of Example 2.1 were taken and compounded in a Z-arm kneader according to the following recipe:

Addition 1 to the base mixture, the following chemicals were added in the sequence shown: 1 kg of carbon black granules as supra, 150 g of stearic acid, 500 g of zinc oxide powder ("red seal", Grillo Zinkoxid GmbH, having a sieve residue on a sieve with 42 µm mesh width of approximately 0.05 % of the total mass, and a BET surface of from 3 m²/g to 5 m²/g, determined in accordance with DIN 55908), 100 g of 2,2,4-trimethyl-1,2-dihydroquinoline, polymerised, 100 g of N-isopropyl-N'-phenyl-p-phenylene diamine, 600 g of a naphthenic process oil (Shell, ®Gravex 973) having a refraction number determined in accordance with DIN 51423-1 of 1.506 at 20 °C, and a kinematic viscosity at 20 °C of 1500 mm²/s, and 1.8 kg of a non-self-curing novolak type phenolic resin (®Alnovol PN 320 rubber reinforcing resin) together with 200 g of hexamethylene tetramine

Addition 2 to the base mixture, after addition of, and homogenisation with, the other additives of addition 1:

310 g of crystallised sulphur (®Crystex OT 20, with a mass fraction of 80 % of elemental sulphur and 20 % of naphthenic process oils), and 120 g of N,N-dicyclohexyl-2-benzothiazyl-sulphenamide (also referred to as "S-benzothiazol-2-yl-N,N-dicyclohexyl-thiohydroxyl-amine", CAS No. 4979-32-2)

The base rubber mixture was charged, and additions 1 and 2 were added in sequence, and well homogenised at a temperature not exceeding 150 °C (jacket temperature).

Examples 2.3 to 2.5

Example 2.2 was repeated, with the following changes:

2.3 and 2.5: 600 g of Gravex 973 were replaced by 600 g of the adduct resin of Example 1.2

5 2.4 and 2.5: 200 g of hexamethylene tetramine were replaced with 250 g of a mixture of hexamethylene tetramine (200 g) and 50 g of a binder made from a mixture of EPDM rubber and an ethylene-vinyl alcohol copolymer

The test results are summarised in the following table.

Table 1 Test Results

Rubber mixture	unit	2.2	2.3	2.4	2.5
ΔM (Torque change, Rheometer, 150 °C)	dN·m	42.7	48.3	16.4	18.5
time until 5 % of maximum viscosity reading	min	1.3	1.7	1.0	0.8
10 % of maximum viscosity reading	min	1.9	2.4	1.3	1.1
90 % of maximum viscosity reading	min	13.5	15.2	5.2	4.9
95 % of maximum viscosity reading	min	16.2	18.2	6.3	5.9
σ_b tensile strength at break	MPa	14.0	14.3	17.6	17.6
ϵ_b elongation at break	%	274	233	359	322
σ (10 %)	MPa	3.0	4.1	2.7	3.4
σ (25 %)	MPa	3.5	4.6	3.2	4.1
σ (50 %)	MPa	4.2	5.5	4.0	5.1
σ (100 %)	MPa	5.9	7.6	5.9	7.4
rebound resilience at 23 °C	%	36	34	33	32
rebound resilience at 70 °C	%	46	39	39	37
Hardness (Shore A, 23 °C)		86	93	87	92
Hardness (Shore A, 70 °C)		83	91	83	88

It can be seen by comparison of the experimental data of rubber compounds using a

conventional processing oil, and rubber compounds where the processing oil has been exchanged for the aldehyde-carbamate adduct resin according to the present invention, hardness (Shore hardness), and strength at given elongations have been dramatically improved, by between 6 % and 10 % for Shore hardness, and by 24 % to 31 % for strength, while the elongation at rupture was only diminished by between 10 % and 15 %, and the rebound resilience by only from 6 % to 15 %.

Example 3 Effect of Addition Sequence

An adduct resin 3.1 was prepared following the recipe of Examples 1.1 and 1.2, from n-butylcarbamate and formaldehyde. The final resin contained moieties derived from n-butylcarbamate (nBC) and moieties derived from formaldehyde (FA) in a stoichiometric ratio of $n(\text{nBC}) : n(\text{FA}) = 1.0 \text{ mol/mol}$, where $n(X)$ stands for the amount of substance n of component X.

A base rubber mixture 3.2 was prepared by intimately mixing, in a Z-arm kneader, 100 kg of SMR (Standard Malaysian Rubber) and 60 kg of carbon black granules (type N 326, having a bulk density of 455 kg/m^3) for three hours at a temperature between $120 \text{ }^\circ\text{C}$ and $160 \text{ }^\circ\text{C}$.

To this base rubber mixture, the following components were added in sequence:

Additions 1 (denoted by "A1", one after the other, in the sequence of the rows in the table),

Curing Agent (denoted by "C"),

Additions 2 (denoted by "A2", one after the other, in the sequence of the rows in the table).

Table 2 Composition of Rubber Compounds (mass of components)

Rubber Mixture	3.01	3.02	3.03
Base Rubber Mixture 3.2	160.0 g	160.0 g	160.0 g
A1: Carbon Black N 330 ¹	10.0 g	10.0 g	10.0 g
A1: stearic acid	1.5 g	1.5 g	1.5 g
A1: zinc oxide ²	5.0 g	5.0 g	5.0 g
A1: ®Vulkanox HS ³	1.0 g	1.0 g	1.0 g
A1: ®Vulkanox 4010 ⁴	1.0 g	1.0 g	1.0 g
A1: Adduct Resin 3.1		6.0 g	
A1: phenol novolak ⁵		9.0 g	
A1: mixture of adduct resin 3.1 and phenol novolak ⁶	9.0 g		15.0 g
C: hexamethylene tetramine	1.0 g	1.0 g	1.0 g
A2: Sulphur ⁷	3.1 g	3.1 g	3.1 g
A2: ®Vulkacit NZ ⁸	1.2 g	1.2 g	1.2 g

1 Carbon Black N 330 (having a bulk density of 375 kg/m³)

2 zinc oxide powder("red seal", Grillo Zinkoxid GmbH)

5 3 2,2,4-trimethyl-1,2-dihydroquinoline, polymerised

4 N-isopropyl-N'-phenyl-p-phenylene diamine

5 non-self-curing novolak type phenolic resin (®Alnovol PN 320)

6 mixture of adduct resin 3.1 (mass fraction: 40 %) and phenol novolak 5 supra (mass fraction 60 %), as described in EP 2 253 649 A1

10 7 ®Crystex OT 20, with a mass fraction of 80 % of elemental sulphur and 20 % of naphthenic process oils

8 N-tert. butyl-benzothiazyl-sulphenamide, CAS No. 000095-31-8

The base rubber mixture was charged, and additions 1, curing agent C, and addition 2 were added in the sequence of table 2, and well homogenised in a rheometer at a temperature not exceeding 150 °C (jacket temperature). The following physical properties were measured on these samples:

Table 3 Results

Rubber mixture		3.01	3.02	3.03
Mooney-viscosity		121	104	125
torque increase	dN·m	52.3	53.6	52.1
time until 5 % of maximum viscosity reading	min	1.3	1.6	1.4
10 % of maximum viscosity reading	min	7.8	8.8	8.0
tan δ measured at 0.1 s ⁻¹ , and 60 °C		0.346	0.316	0.378
σ_b tensile strength at break	MPa	18.8	21.3	17.8
ϵ_b elongation at break	%	261	299	240
rebound resilience at 23 °C	%	37	34	37
rebound resilience at 70 °C	%	45	41	43
Hardness (Shore A, 23 °C)		91	94	93
Hardness (Shore A, 70 °C)		88	89	88

It can be seen that by separate addition of the reactive diluent (the adduct resin of example 3.1), there is a marked effect on the Mooney viscosity (the viscosity of the rubber compound prepared in the rheometer), as read during the mixing process. The final hardening effect of the reactive diluent (i. e. the torque after the incorporation of the reactive diluent into the rubber compound by co-reaction), can be seen from the high torque increase which is larger than for the comparative mixtures 3.01 and 3.03 where different amounts of a mixture or at least partially reacted mixture of the reactive diluent (in this case, a butyl urethane-formaldehyde adduct are added. Although the reactive diluent lowers the processing viscosity (as seen from Mooney viscosity in Example 3), and thereby also lowers the energy consumption during processing of the rubber compound, the final hardness is not impaired, but even increased over the comparative examples 3.01 and 3.03. This can be seen in the values for the Shore hardness, and the tensile strength. Even though the tensile strength is increased, the elongation at break is also increased versus the comparative experiments. A further advantage is the lower tan δ which means less losses and evolution of heat in the rubber article when exposed to mechanical influence. It is apparently of paramount

importance that the reactive diluent is not consumed by reaction with other components in the rubber compound. It has been found in the investigations on which the present invention is based that in a mixture, or in the mixtures according to a preferred embodiment of EP 2 253 649 A1 wherein the novolak is prepared in the presence of a urethane-aldehyde resin, the latter resin is already reacted to a large extent with the novolak, and has thus lost completely its function and effect as reactive diluent in the rubber composition. The loss of effect is greater if the mass fraction of urethane-aldehyde resin in the mixture with a novolak is still smaller, such as 9 % or 10 % as in the examples of EP 2 253 649 A1. At least 50 % of the N-methylol or N-methylene groups formed by addition of aldehydes to the -NH₂ group of the urethane, or carbamic ester, must still be present in the urethane-aldehyde resin as reactive diluent, to reach the desired effect. Simply increasing the mass of such reactive diluent has not turned out to be a viable alternative as this higher quantity tends to lower the processing viscosity of the rubber compound mixture so far that no efficient mixing is possible anymore. A premature reaction between a reactive diluent based on resinous reaction products of urethanes, or carbamic esters, and aldehydes, particularly, formaldehyde can be effectively excluded if the aldehyde resin is not added in the form of a mixture with aldehyde-reactive components such as phenolic bodies.

Claims:

1. A rubber composition comprising a rubber and a processing additive wherein the processing additive is a functional reactive diluent having at least one functional group in the molecule which is not an olefinic unsaturation.
2. The rubber composition of claim 1 wherein the at least one functional group of the processing additive is selected from the group consisting of an epoxide group, an aziridine group, an N-alkylolamide group, an N-alkyleneamide group, an N-alkoxyamide group, an isocyanate group, a carbodiimide group, a carboxyl, carboxylic acid anhydride, or acyl halogenide group, and an activated olefinically unsaturated group which is activated by at least one neighbouring carboxyl, carboxylic acid anhydride, or acyl halogenide group.
3. The rubber composition of claim 1 wherein the processing additive comprises an addition resin AC made from a monofunctional or multifunctional aldehyde A, and an organic compound C having at least one carbamate group $-O-CO-NH_2$, and an organic radical, where the radical can be a monovalent radical R selected from the group consisting of linear, branched or cyclic aliphatic radicals having from one to thirty carbon atoms, and aralkyl radicals, or a divalent organic radical $-R'$ selected from the group consisting of linear, branched or cyclic aliphatic diradicals having from two to thirty carbon atoms and bisalkyl aryl radicals having from 8 to 30 carbon atoms.
4. The rubber composition of claim 3 wherein R has from two to eight carbon atoms.
5. The rubber composition of claim 3 wherein an aliphatic carbamate is used as compound C which is selected from the group consisting of ethyl carbamate, butyl carbamate, hexyl carbamate and 2-ethylhexyl carbamate.

6. The rubber composition of claim 3 wherein an araliphatic carbamate is used as compound C which is selected from the group consisting of benzyl carbamate and α,α -dimethylbenzyl carbamate.
7. The rubber composition of claim 3 wherein a dicarbamate is used as compound C which is selected from the group consisting of ethylene biscarbamate, 1,2-propylene biscarbamate, 1,3-propylene bis carbamate, and 1,4-butylene biscarbamate.
8. The rubber composition of claim 3 wherein a dicarbamate is used as compound C which is selected from the group consisting of xylylene biscarbamate and tetramethylxylylene biscarbamate.
9. The rubber composition of claim 3 wherein a monofunctional aldehyde is used as aldehyde A, and which is selected from the group consisting of formaldehyde, acetaldehyde, propionaldehyde, butyraldehyde, n-pentanal, and n-hexanal.
10. The rubber composition of claim 3 wherein a multifunctional aldehyde is used as aldehyde A, and which is selected from the group consisting of glyoxal, malonaldehyde, succinaldehyde, and glutaraldehyde.
11. The rubber composition of any of claims 3 to 10 wherein the rubber composition also comprises a phenolic reinforcing resin.
12. A process for the compounding of rubber wherein at least one processing additive is added to the rubber before or during compounding, wherein the processing additive is a functional reactive diluent having at least one functional group in the molecule which is not an olefinic unsaturation.
13. The process of claim 12 wherein the at least one processing additive is an addition

resin AC made from a monofunctional or multifunctional aldehyde A, and an organic compound C having at least one carbamate group $-O-CO-NH_2$, and an organic radical, where the radical can be a monovalent radical R selected from the group consisting of linear, branched or cyclic aliphatic radicals having from one to thirty carbon atoms, and aralkyl radicals, or a divalent organic radical $-R'$ selected from the group consisting of linear, branched or cyclic aliphatic diradicals having from two to thirty carbon atoms and bisalkyl aryl radicals having from 8 to 30 carbon atoms.

14. The process of claim 13 wherein the addition resin AC is made from a monofunctional aldehyde or multifunctional aldehyde A, and an aliphatic carbamate C having at least one carbamate group $-O-CO-NH_2$.

15. A method of use of a rubber composition as claimed in any of claims 1 to 11, comprising preparing the apex part of a tyre from a rubber composition as claimed in any of claims 1 to 11.

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2013/058828

A. CLASSIFICATION OF SUBJECT MATTER
INV. C08K5/205 C08L21/00 B60C1/00
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
C08K C08L B60C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 2 253 649 A1 (CYTEC SURFACE SPECIALTIES GERM [DE]) 24 November 2010 (2010-11-24) abstract; claim 8; examples 1,3 paragraphs [0011] - [0013], [0034], [0036] -----	1-14
X	DE 10 2004 059775 A1 (CONTINENTAL AG [DE]) 14 June 2006 (2006-06-14) abstract; claims 1,7; tables paragraphs [0003] - [0007], [0016] - [0022], [0036] -----	1,2,12,15
X	EP 1 216 851 A1 (GOODYEAR TIRE & RUBBER [US]) 26 June 2002 (2002-06-26) abstract; claims; tables paragraph [0011] - paragraph [0013] ----- -/--	1,2,12,15

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents :

<p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier application or patent but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p>	<p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"&" document member of the same patent family</p>
---	---

Date of the actual completion of the international search 12 June 2013	Date of mailing of the international search report 19/06/2013
---	--

Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer Mettler, Rolf-Martin
--	--

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2013/058828

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2004/127616 A1 (WENTWORTH GARY [US] ET AL) 1 July 2004 (2004-07-01) abstract paragraphs [0183], [0184] -----	1,2,12

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2013/058828

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 2253649	A1	24-11-2010	
		CN 102459379 A	16-05-2012
		EA 201171365 A1	30-05-2012
		EP 2253649 A1	24-11-2010
		EP 2432810 A1	28-03-2012
		TW 201114811 A	01-05-2011
		US 2012095152 A1	19-04-2012
		WO 2010133622 A1	25-11-2010

DE 102004059775	A1	14-06-2006	NONE

EP 1216851	A1	26-06-2002	
		BR 0105921 A	06-08-2002
		EP 1216851 A1	26-06-2002
		JP 3790462 B2	28-06-2006
		JP 2002201315 A	19-07-2002
		US 2002124927 A1	12-09-2002

US 2004127616	A1	01-07-2004	NONE
