



US00D428373S

United States Patent [19]

[11] Patent Number: Des. 428,373

Todd et al.

[45] Date of Patent: ** *Jul. 18, 2000

[54] COMBINED REARVIEW MIRROR AND NINE PIXEL SIGNALLING INDICATOR

DESCRIPTION

[75] Inventors: **Daniel R. Todd; Daniel J. Mathieu; Allen A. Bukosky; Michael J. Musiel,** all of Sheboygan, Wis.

FIG. 1 is a perspective view of a combined rearview mirror and nine pixel signalling indicator showing our new design, and with the signalling indicator energized, and with the broken line showing for illustrative purposes only and forming no part of the claim design;

[73] Assignee: **K. W. Muth Company, Inc.,** Sheboygan, Wis.

FIG. 2 is a second perspective view of the combined rearview mirror and nine pixel signalling indicator showing our new design and with the signalling indicator deenergized, and with the broken line showing for illustrative purposes only and forming no part of the claim design;

[*] Notice: This patent is subject to a terminal disclaimer.

FIG. 3 is a perspective view from a second direction of the combined rearview mirror and nine pixel signalling indicator showing our new design, and with the signalling indicator energized, and with the broken line showing for illustrative purposes only and forming no part of the claim design;

[**] Term: **14 Years**

FIG. 4 is a perspective view taken from the same position as FIG. 3 of the combined rearview mirror and nine pixel signalling indicator showing our new design, and with the signalling indicator deenergized, and with the broken line showing for illustrative purposes only, and forming no part of the claim design;

[21] Appl. No.: **29/113,326**

FIG. 5 is a front elevation view of the combined rearview mirror and nine pixel signalling indicator of FIG. 1, and showing the signalling indicator energized;

[22] Filed: **Nov. 1, 1999**

FIG. 6 is a front elevation view of the combined rearview mirror and nine pixel signalling indicator of FIG. 1, and showing the signalling indicator deenergized;

[51] **LOC (7) Cl.** **12-10**

[52] **U.S. Cl.** **D12/188**

[58] **Field of Search** D12/187-189; 359/838, 843, 844, 850, 868, 871, 872, 874, 876, 877, 881, 841; 248/475.1, 480, 481, 479, 487, 494, 483

FIG. 7 is a rear elevation view of the combined rearview mirror and nine pixel signalling indicator of FIG. 1;

[56] References Cited

U.S. PATENT DOCUMENTS

D. 372,450	8/1996	Santo	D12/187
D. 394,833	6/1998	Muth	D12/187
D. 409,540	5/1999	Muth	D12/187

FIG. 8 is a top plan view of the combined rearview mirror and nine pixel signalling indicator of FIG. 1;


Primary Examiner—Ralf Seifert
Attorney, Agent, or Firm—Wells, St. John, Roberts, Gregory & Matkin, P.S.


FIG. 9 is a bottom plan view of the combined rearview mirror and nine pixel signalling indicator of FIG. 1; FIG. 10 is a side elevation view of the combined rearview mirror and nine pixel signalling indicator of FIG. 1; and, FIG. 11 is a side elevation view of the combined rearview mirror and nine pixel signalling indicator of FIG. 1, and which is taken from a position opposite to that shown in FIG. 10.

[57] CLAIM

The ornamental design for a combined rearview mirror and nine pixel signalling indicator, as shown and described.

1 Claim, 8 Drawing Sheets

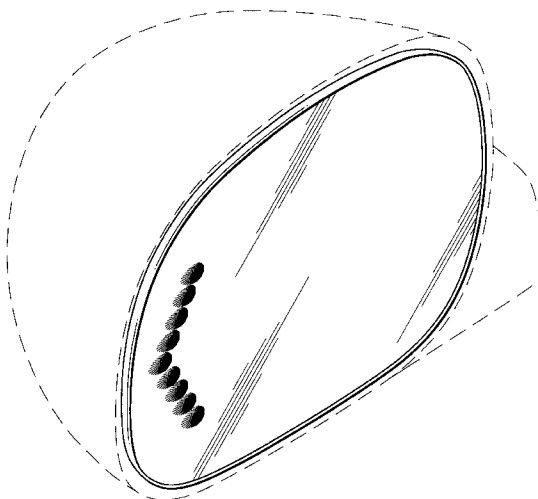

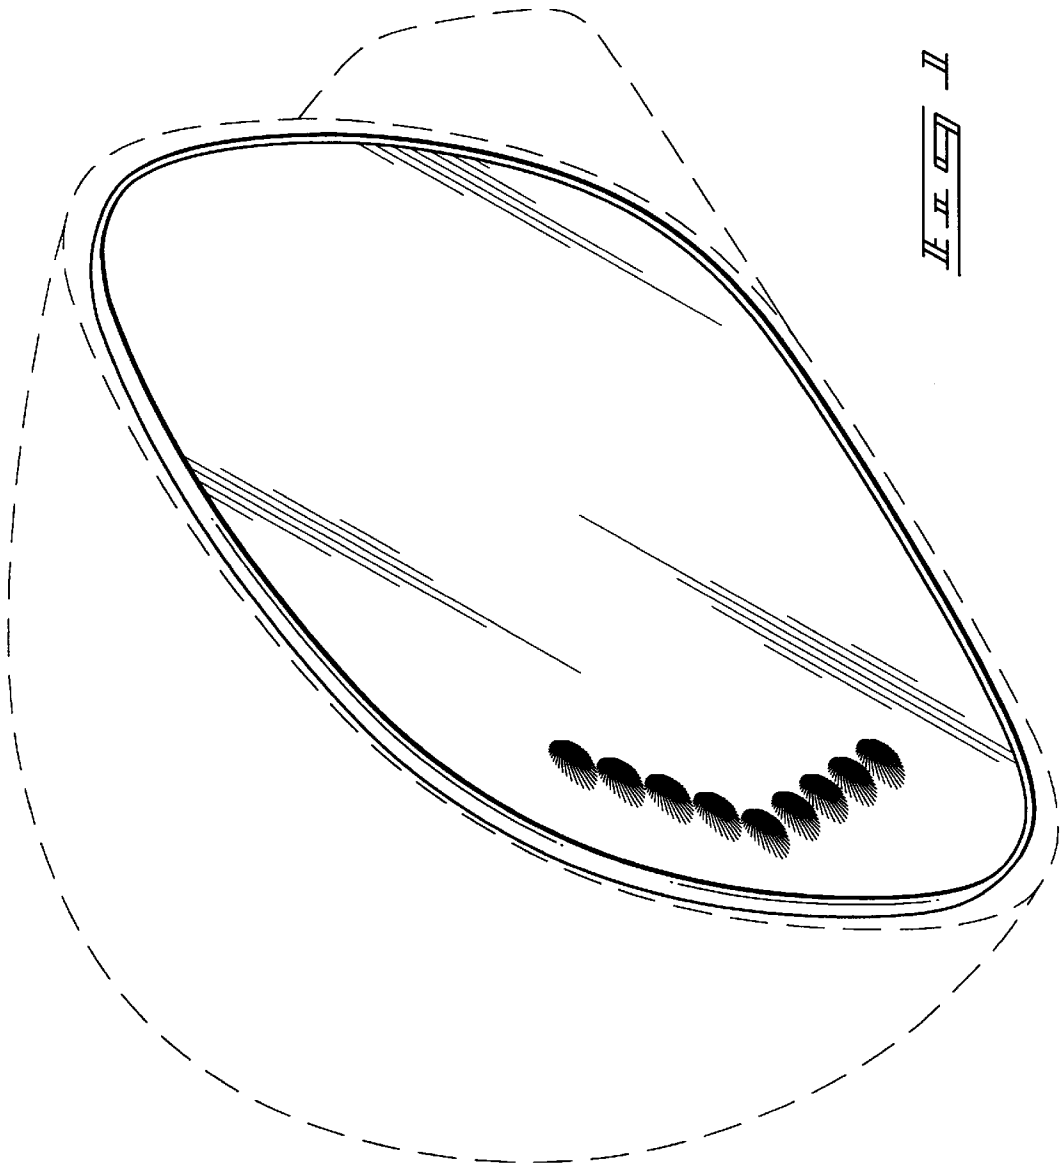

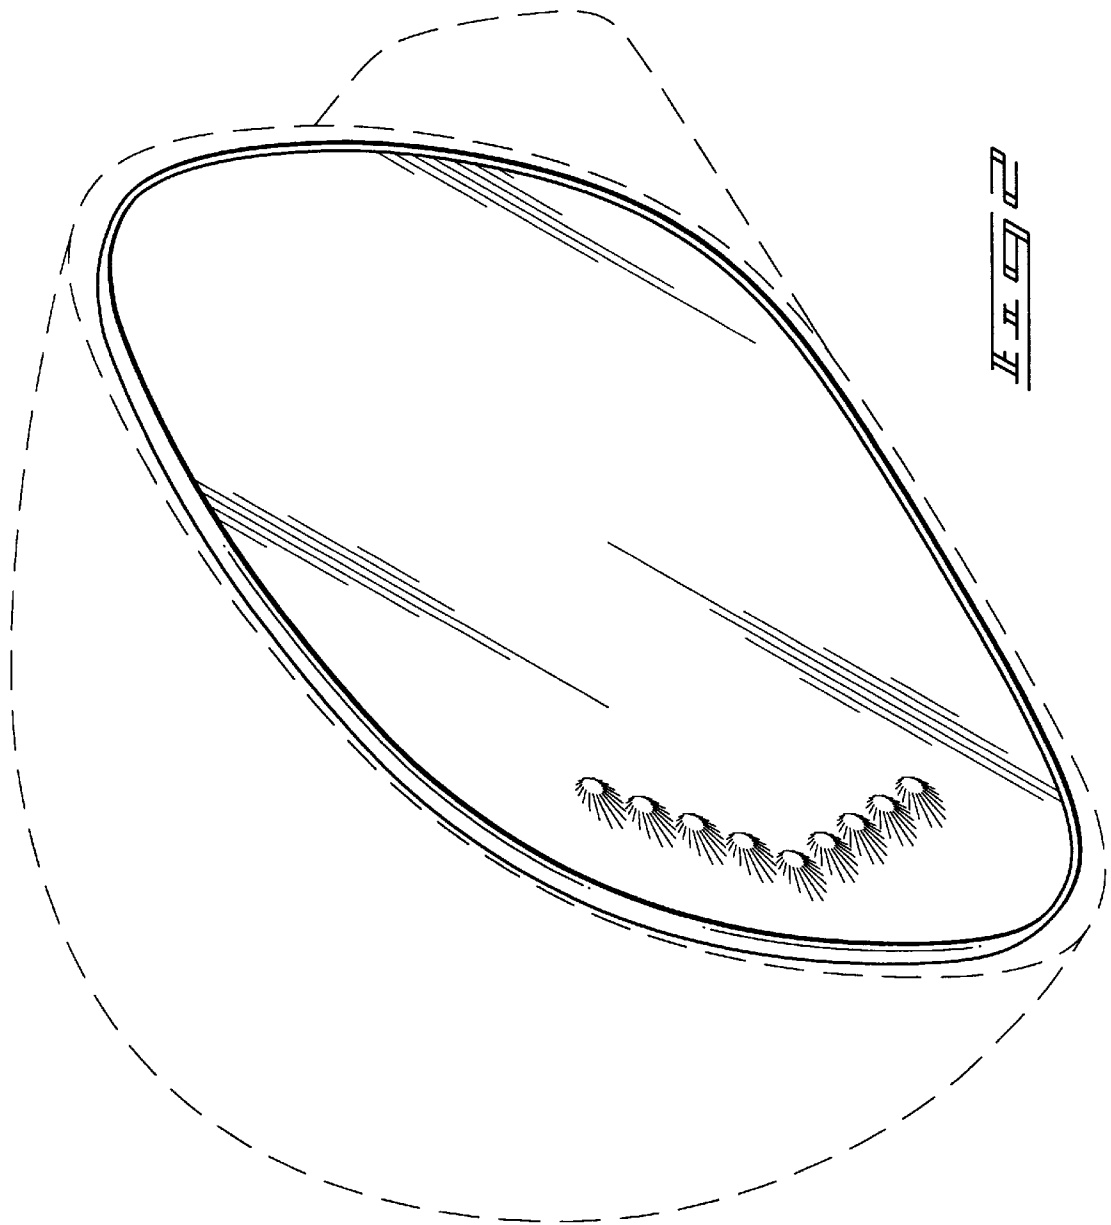
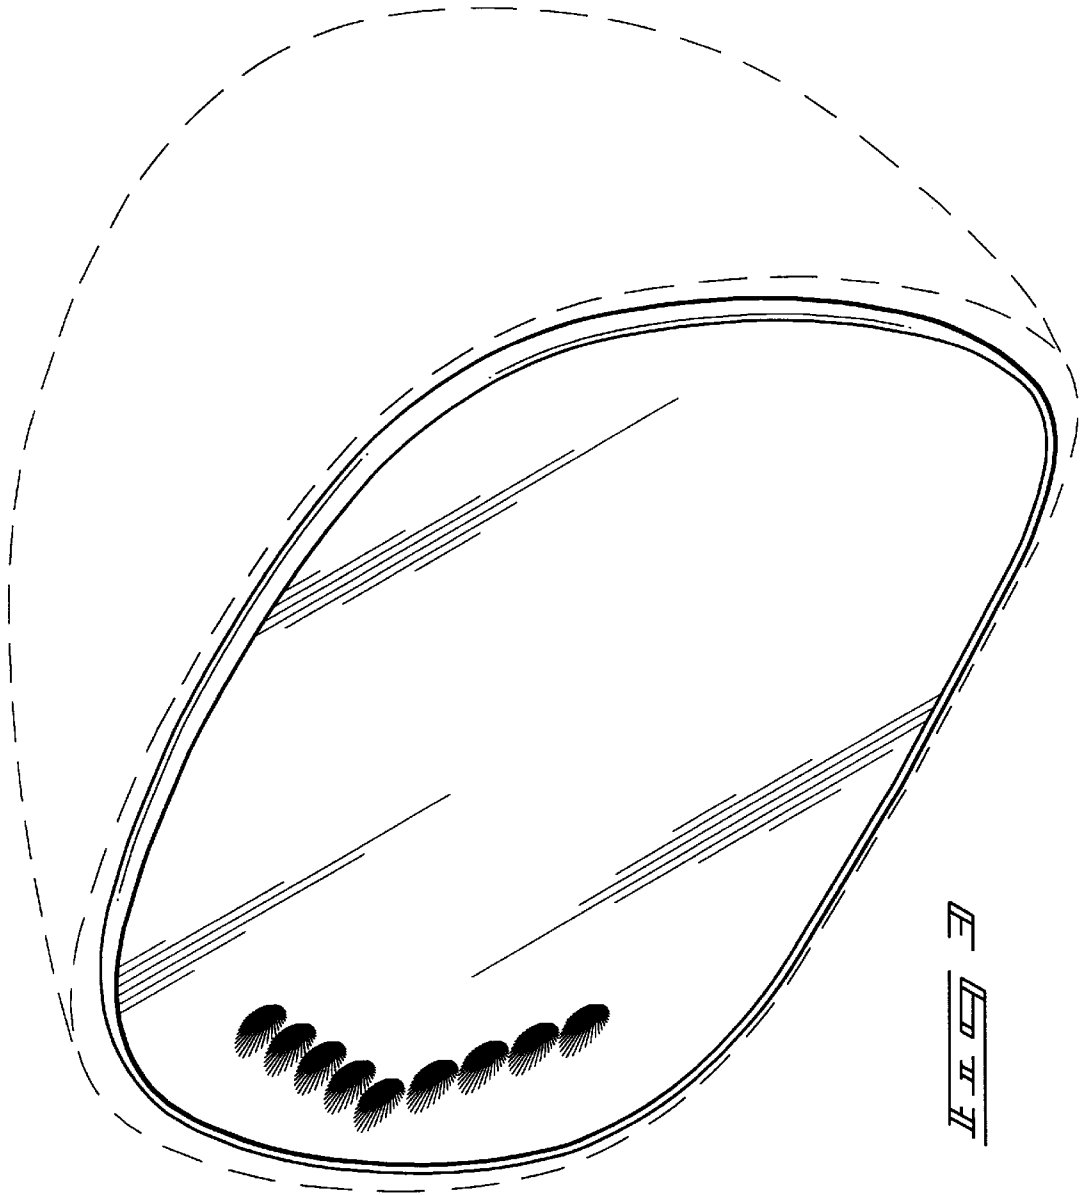


FIG. 2





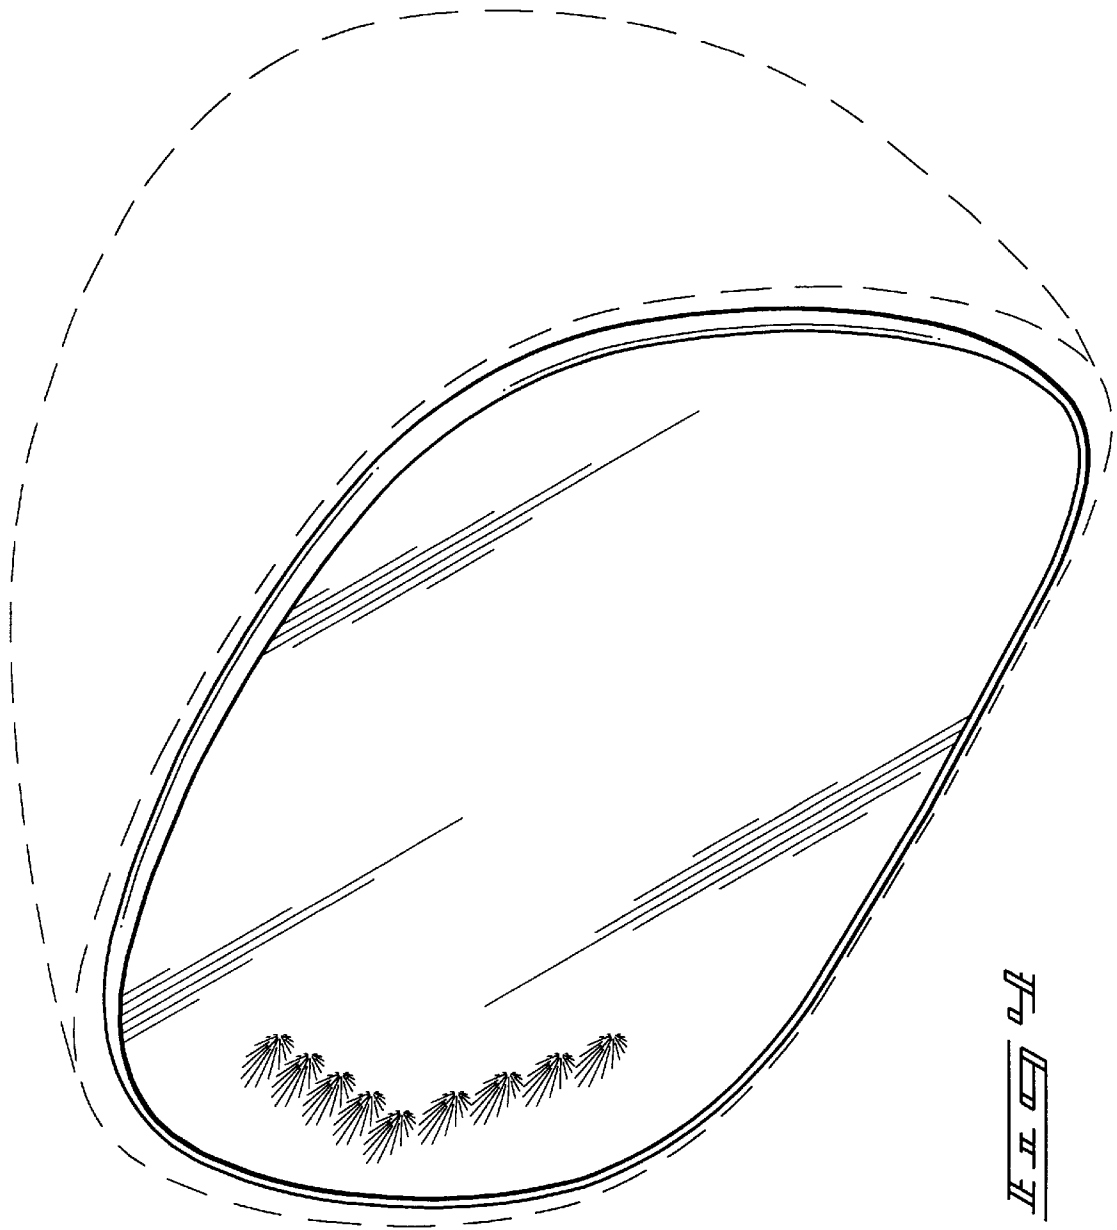


FIG. 4

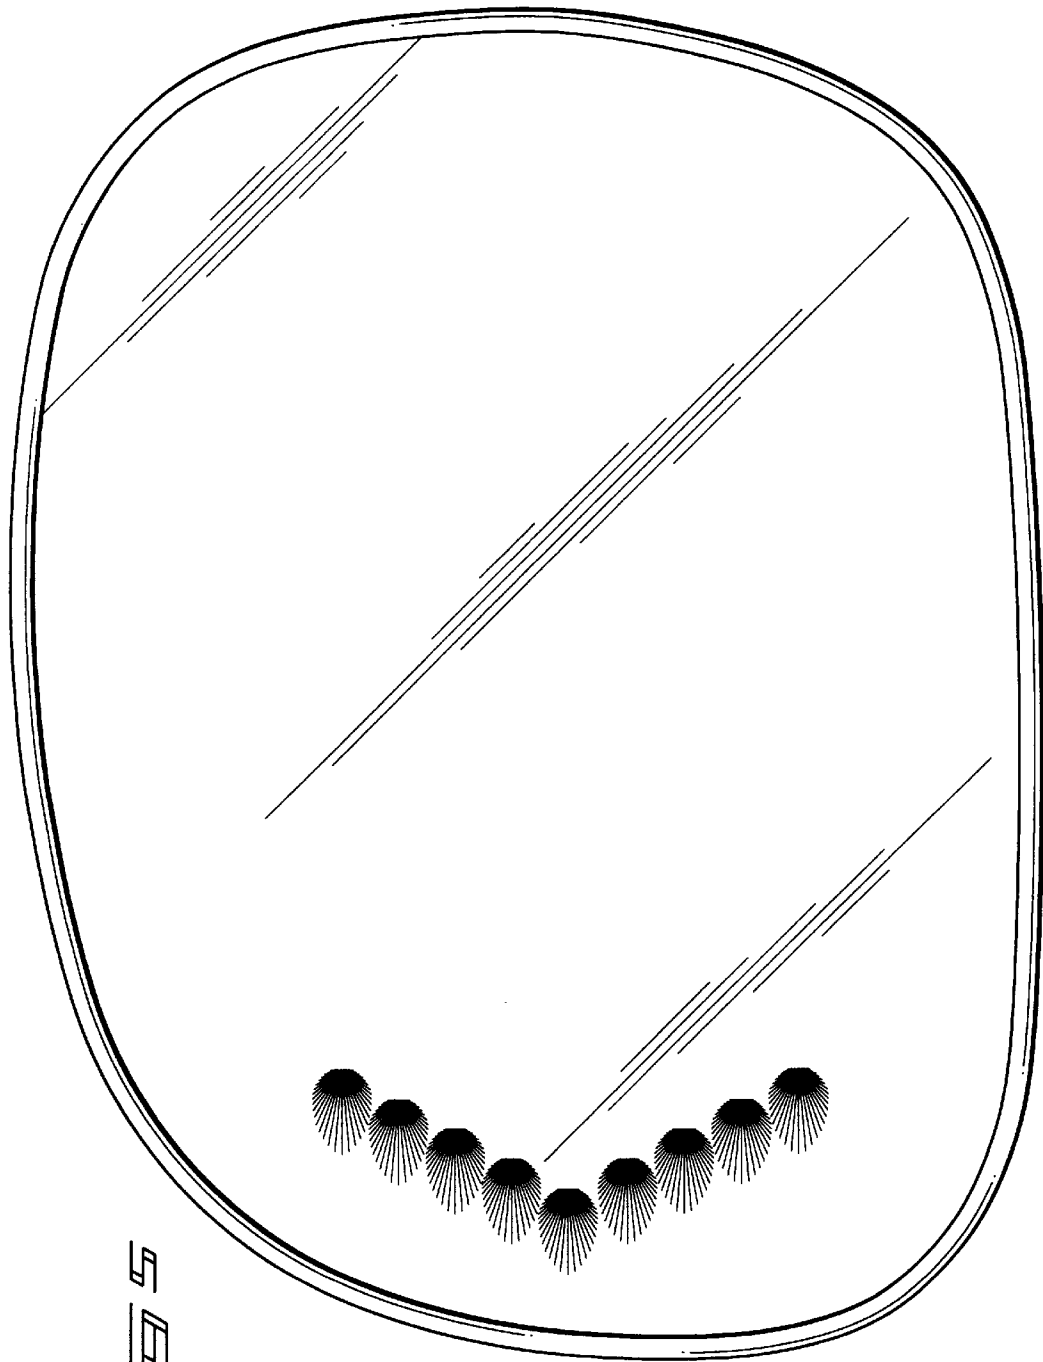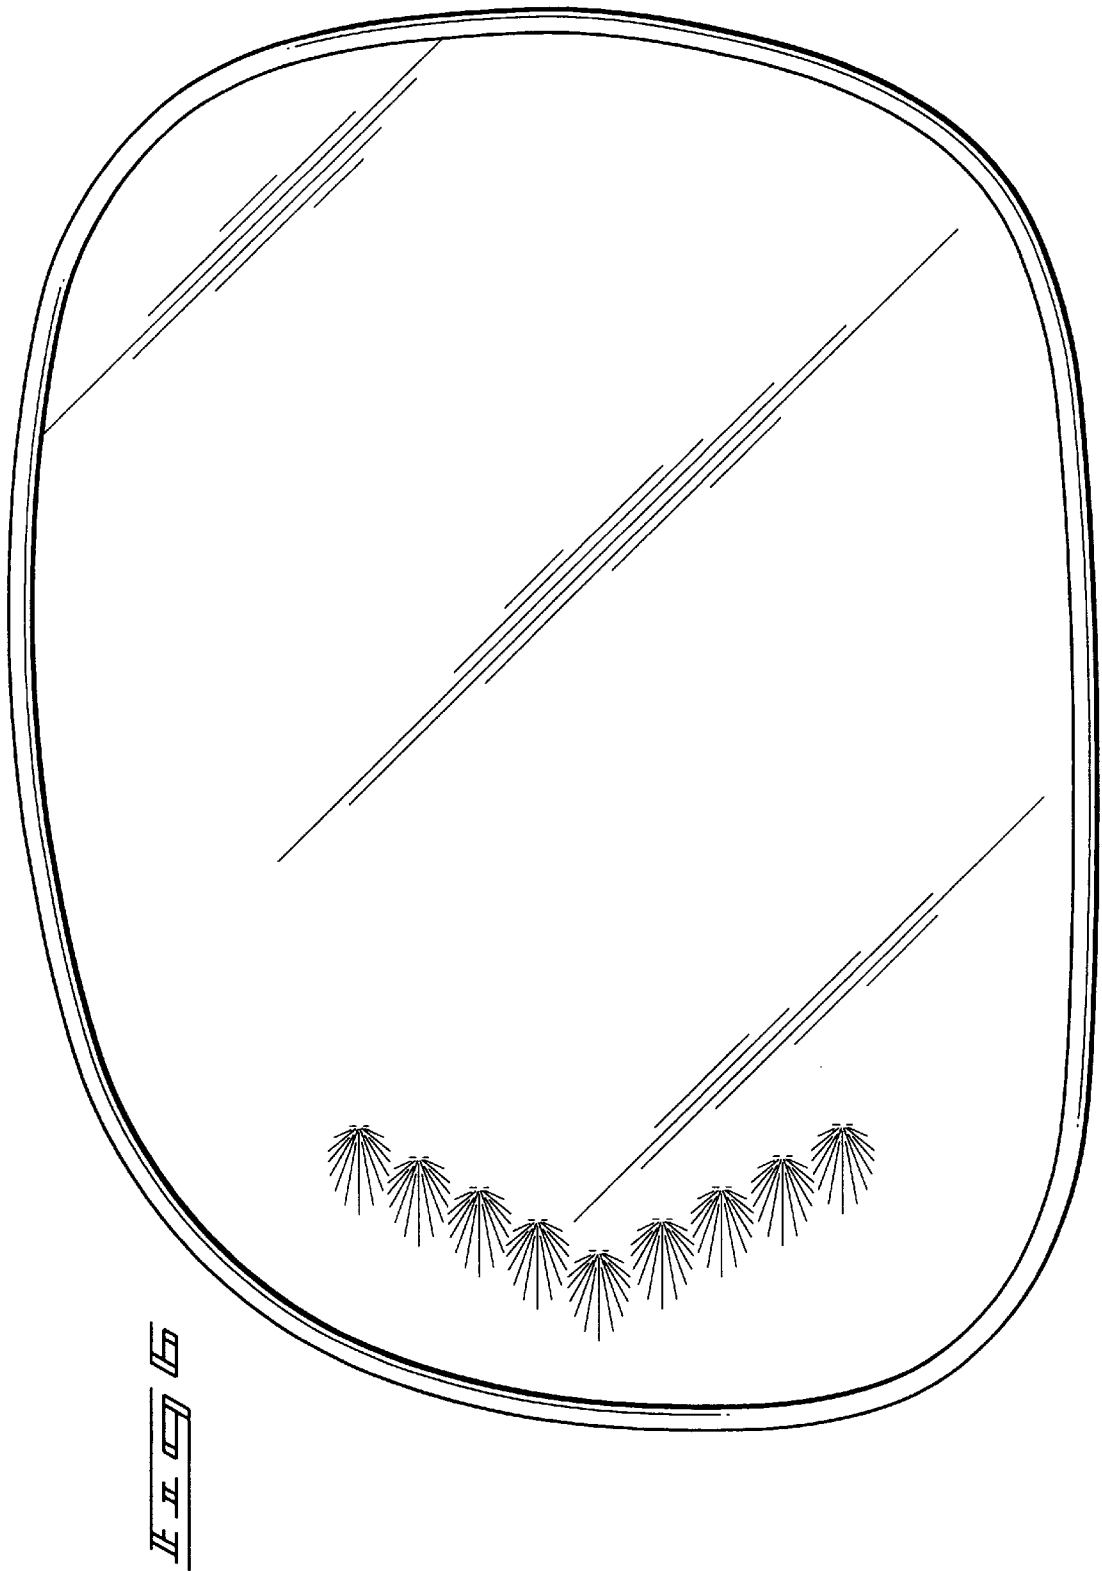

DESIGN



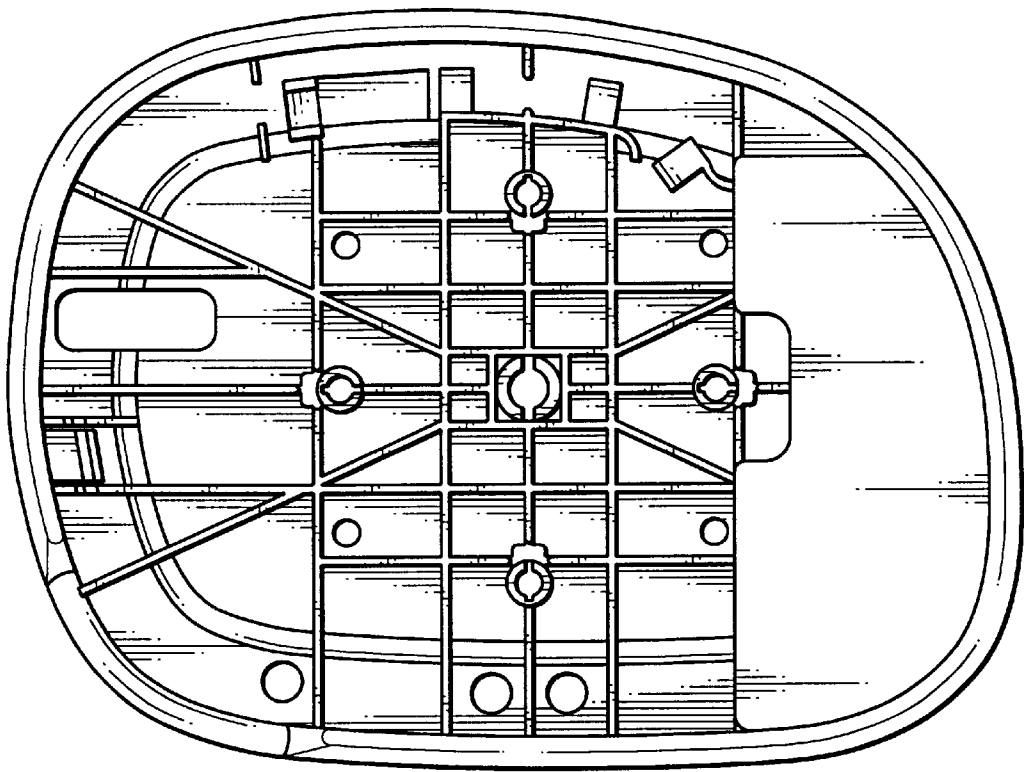


Fig. 7




Fig. 8




Fig. 9



Fig. 1 Fig. 2



Fig. 3 Fig. 4