

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
29 December 2011 (29.12.2011)

(10) International Publication Number
WO 2011/161706 A1

- (51) **International Patent Classification:**
A61M 11/02 (2006.01) *A61M 16/00* (2006.01)
- (21) **International Application Number:**
PCT/IT2010/000284
- (22) **International Filing Date:**
25 June 2010 (25.06.2010)
- (25) **Filing Language:** Italian
- (26) **Publication Language:** English
- (71) **Applicant (for all designated States except US):** **MED 2000 S.R.L.** [IT/IT]; Via dell'Artigianato, 23/25, I-25080 Padenghe sul Garda, Brescia (IT).
- (72) **Inventor; and**
- (75) **Inventor/Applicant (for US only):** **FRACCAROLI, Davide** [IT/—]; Via Vincenzo Monti, 15, I-25015 Desenzano del Garda, Brescia (IT).
- (74) **Agents:** **PULIERI, Gianluca, Antonio** et al.; Jacobacci & Partners S.p.A., Piazza della Vittoria, 11, I-25121 Brescia (IT).
- (81) **Designated States (unless otherwise indicated, for every kind of national protection available):** AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States (unless otherwise indicated, for every kind of regional protection available):** ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— with international search report (Art. 21(3))

(54) **Title:** AEROSOL THERAPY DEVICE

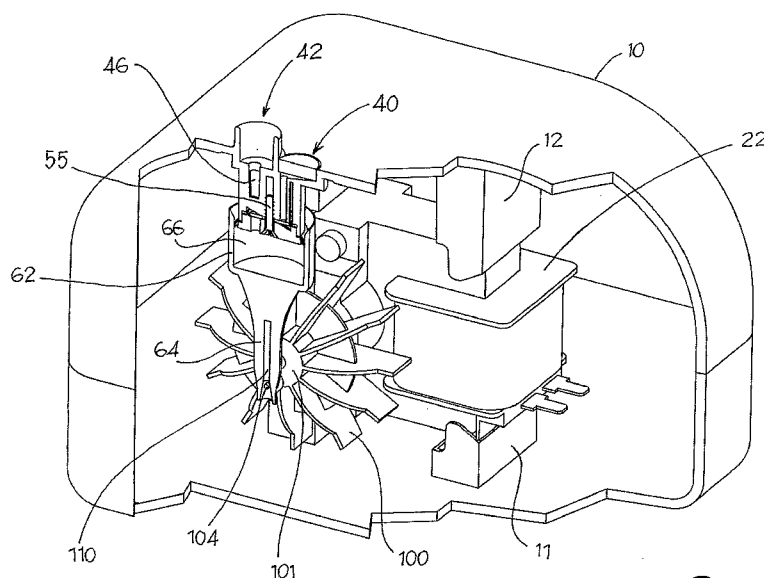


Fig. 2

(57) **Abstract:** The present invention relates to an aerosol-therapy device (19), comprising a casing (10), a compressor group (20) mounted in the casing and air intake (40) and delivery means (42) respectively to and from said compressor group. The compressor group comprises a motor (22) and a compressor device (24) which can be driven by the motor to draw in and deliver air respectively through the air delivery and intake means. In addition, the compressor device comprises a piston (50) attached and supported solely by the casing and a cylinder (60) sliding on the piston (101) and eccentrically connected to the drive shaft (30) of the motor.



WO 2011/161706 A1

"Aerosol therapy device"**DESCRIPTION**

[0001]. The present invention relates to an aerosol-therapy device of the type comprising a casing, a compressor group mounted in said casing and air intake means and air delivery means respectively to and from said compressor group. The compressor group comprises an electric motor and a compressor device which can be activated by said motor to draw in air from the outside environment and deliver it to a dispenser device, respectively through said air intake and delivery means.

[0002]. Devices having such characteristics are known for example in document US6318360.

[0003]. The purpose of the present invention is to propose an aerosol-therapy device in which the assembly of the compressor group and its fitting into the casing of the device result considerably simplified, with a consequent saving of time and of assembly costs of the whole device.

[0004]. Another purpose of the invention is to make available an aerosol-therapy device wherein the compressor group is composed of a smaller number of components than the known groups, is more reliable and does not require maintenance.

[0005]. Such purposes are achieved by an aerosol-

therapy device according to claim 1. The dependent claims describe preferred or advantageous embodiments of the device.

[0006]. The characteristics and advantages of the device according to the invention will however be evident from the description below, made by way of a non-limiting example with reference to the attached figures, wherein:

[0007]. - figure 1 is an exploded perspective view of the aerosol-therapy device according to the invention;

[0008]. - figure 2 is a through-section of the assembled device;

[0009]. - figure 3 shows the device sectioned at the point of the compression device;

[0010]. - figure 4 is another cross-section view of the device;

[0011]. - figure 5a shows an enlarged perspective view of the sealing plug in figure 1;

[0012]. - figure 5b shows a perspective view of the compressor device, in a perspective opposite to that shown in figure 1; and

[0013]. - figures 6a and 6b show two corresponding sections of the compressor device in an intake and delivery phase respectively.

[0014]. In said drawings, reference numeral 1 globally

denotes an aerosol-therapy device according to the invention in its entirety.

[0015]. The device 1 comprises a casing 10, a compressor group 20 mounted in said casing and air intake 40 and delivery 42 means respectively to and from said compressor group 20. The compressor group 20 comprises in turn a motor 22 and a compressor device 24 which can be activated by said motor 22 to draw in air from the outside environment and deliver air to a dispenser device (not shown), respectively through said air intake 40 and delivery means 42.

[0016]. In one embodiment, the motor 22 is an inductive rotation motor, that is of the type comprising a stator 26 and a rotor 28 which a drive shaft 30 is joined to.

[0017]. The compressor device 24 comprises a piston 50 fixed to and supported exclusively by the casing 10 and a cylinder 60 sliding on said piston 50 and eccentrically connected to the drive shaft 30 of the motor. Thanks to such connection of the cylinder 60 to the drive shaft 30 by means of an eccentric, the rotation of the drive shaft 30 translates into a substantially rectilinear alternate movement of the cylinder 60 in relation to the piston 50, which is, instead fixed, being joined to the casing 10. In other words, the compressor device 24 is activated by the motor 22 by means of a connecting rod-

crank mechanism.

[0018]. Preferably, the cylinder 60 is connected to a fan 100, described below, eccentrically.

[0019]. According to a preferred embodiment, the cylinder 60 slides along an annular sealing membrane 52 supported by the piston 50. For example, said annular membrane 52 is made in self-lubricating material.

[0020]. In a preferred embodiment, the cylinder 60 comprises a hollow head 62, which houses the piston 50 so as to slide, and a stem 64 which extends from said head 62 for connection of the cylinder to the drive shaft 30. The hollow head 62 and the piston 50 define between them a cylinder chamber 66. Advantageously, the stem 64 is made in one piece with the hollow head 62. In other words, head 62 and stem 64 are rigidly connected, without any connection joint. Such design choice considerably simplifies the structure of the compressor device, also in the light of the reduced size of these components, but entails the generation of a slight oscillatory movement of the cylinder in relation to the piston 50. To such purpose, the annular sealing membrane 52 is elastically deformable so as to compensate such oscillatory movement of the cylinder 60. For example, said annular membrane 52 is a "cup" shape, that is it has a lip-shaped peripheral rim, for example facing the cylinder 60.

[0021]. In a preferred embodiment, the air intake 40 and delivery means 42 comprise intake 44 and delivery 46 passages suitable for placing the cylinder chamber 66 in fluidic communication respectively with the outside environment and with a delivery connector 70 made on the casing 10 and connectable to a delivery pipe (not shown). A check valve 80, hereafter described in greater detail, is joined to each of said intake 44 and delivery passages 46. In addition, a filter 72 is placed along the intake passage 44 at least.

[0022]. In one embodiment, the piston 50 comprises a piston body 51 which the air intake 44 and delivery passages 46 are made at least partially in and defining a valve seat 53 in which said passages are open towards the cylinder chamber 66. In said seat 53 a valve element 80 is housed which as well as ensuring the fluidic separation of the intake 44 and delivery passages 46, acts as a check valve for each of said passages, as will be explained further below. A sealing plug 54 closes the valve seat 53 so as to hold the valve element 80 in said seat 53. For example, the sealing plug 54 is screwed to the piston body 51 by a single central screw 55. An intake aperture 56 and a delivery aperture 58 are made in the sealing plug 54 able to place the cylinder chamber 66 in fluidic communication respectively and alternatively

with the intake 44 and delivery passages 46.

[0023]. In one advantageous embodiment, the valve element 80 is a membrane comprising two flexible tabs 82, each closing a respective aperture 56, 58 in the sealing plug or a respective passage 44, 46 in the piston body. At either the passage 44, 46 or relative aperture 56, 58, the valve seat 53 or plug 54 has an inclined rib 53', 54' suitable to enable a flexing of the respective tab 82 of the valve element 80, and therefore the opening of the aperture or passage, during the air intake or delivery phase. For example, at the intake passage 44, the valve seat 53 has a flat area, in front of which the plug 54 has the intake aperture 56 crossed by an inclined rib 54'. At the delivery passage 46, the valve seat 53 has an inclined rib 53' which crosses said delivery passage 46. In front of said inclined rib 53', the plug 54 has the delivery aperture 58 open in a flat area of the plug 54, which the other tab 82 normally rests on to close said delivery aperture 58. Centrally, the valve seat 53 and the plug 54 have respective flat areas between which a corresponding central portion of the valve element 80 is held, said flat areas and said central portion being finally crossed by a hole for the passage of the connection screw 55 of the plug 54 to the piston body 51.

[0024]. During the intake phase, the tab 82 which is

normally placed so as to seal the intake passage 44 flexes as a result of the negative pressure built up in the cylinder until it rests on the rib 54' of the plug, as shown for example in figure 6a. This way the intake

5 passage 44 is placed in fluidic communication with the intake aperture 56 and the air can enter the cylinder chamber 66. In this phase the other tab 82 is kept in contact with the flat area of the plug 54, thereby sealing the delivery aperture 58.

10 **[0025]**. The opposite happens during the delivery phase: the tab 82 sealing the intake passage is pressed harder against the flat portion of the piston body; the other tab 82, normally sealing the delivery aperture 58, is pressed so that it flexes against the piston body 51,

15 until it abuts against the inclined rib 53' of the valve seat 53, as for example shown in figure 6b. At this point, the delivery aperture 58 and the delivery passage 46 are in fluidic communication with each other and the air can be delivered from the cylinder chamber 66 to the

20 dispenser device.

[0026]. Returning to the annular sealing membrane 52, in one embodiment it is placed and held between the piston body 51 and the sealing plug 54.

[0027]. In one advantageous embodiment variation, the

25 annular sealing membrane 52 is made in one piece with

said plug 54. .

[0028]. According to a preferred embodiment, the device 1 comprises a cooling fan 100 of the compressor group. Said fan is mounted on the drive shaft 30. According to 5 one aspect of the invention, the fan 100 is fitted on the end of the drive shaft 30 projecting from the motor 22 on the side facing the cylinder 60, rather than on the opposite side, as in the compressor groups of the prior art. The fan 100 has a hub 101 where, in an eccentric 10 position in relation to the rotation axis, there is an eccentric hole 102 housing an attachment peg 104 for attachment to the cylinder 60. For example, said peg 104 is inserted in a corresponding hole 106 of the cylinder 60, made in the end of the stem 64.

15 **[0029]**. This position of the fan 100 makes it possible to cool both the motor and the compressor device more efficiently. In addition, the fan itself also acts as an eccentric, thereby making it unnecessary to fit the traditional eccentric with consequent savings in 20 materials and labour costs.

[0030]. Advantageously, the fan 100 comprises, in a position diametrically opposite the eccentric hole 102, a blade which is thicker than the other blades so as to act as a balancing mechanism for the transmission of the 25 movement from the drive shaft 30 to the cylinder 60.

[0031]. According to a further aspect of the invention, in the stem 64 of the cylinder 60 there is a lubrication tank 110 open at the end connected to the drive shaft and containing a lubrication liquid which is gradually released in a controlled manner to lubricate the parts in contact between said stem and said drive shaft. For example, said lubrication tank 110 is in the shape of a hole which extends substantially along most of the length of the stem 64 and which opens onto the hole 106 housing the peg 104.

[0032]. Such tank 110 can be filled easily during the production process and distribute over time the lubricant substance which the transmission mechanism of the movement needs, without the need for specific manual distribution means, such as soaked sponges, stoppers etc.

[0033]. Going back to the structure of the device 1, according to a preferred embodiment, the piston body 51 is in one piece with the casing 10. The latter may, for example, be made in two pieces, upper 10' and lower 10'', the piston body 51 for example being made in the upper part 10', as a cylindrical projection facing inwards to the casing 10.

[0034]. Advantageously, the two parts 10', 10'' of the casing 10 are provided with respective lower 11 and upper 12 projecting seats, for example made in one piece with

the casing 10, able to hold the motor 22 firmly. Advantageously, once the motor, fan and cylinder have been assembled such assembly is simply placed on the lower seat 11 of the lower part 10" of the casing 10.

5 After fitting the piston 50 to the valve element 80, the sealing plug 54 and the annular sealing membrane 52, the assembly of the device is completed by simply attaching the upper part 10' of the casing to the lower part 10", taking care to rest the upper seat 12 on the motor 22 and

10 to insert the piston 50 in the hollow head 62 of the cylinder 60. It should be noted that the assembly of the compressor group 20 requires only the screwing of the plug 54 to the piston body 51.

[0035]. A person skilled in the art may make

15 modifications, adaptations and replacements of elements with others functionally equivalent to the embodiments of the device according to the invention so as to satisfy contingent requirements, while remaining within the sphere of protection of the appended claims. Each of the

20 characteristics described as belonging to a possible embodiment can be realised independently of the other embodiments described.

CLAIMS

1. Aerosol-therapy device, comprising a casing, a compressor group mounted in said casing, air intake means and air delivery means respectively to and from said
5 compressor group, wherein said compressor group comprises a motor and a compressor device which can be activated by said motor to draw in and deliver air respectively through said air intake and delivery means, characterised by the fact that said compressor device comprises a
10 piston attached to and supported exclusively by said casing and a cylinder sliding on said piston and eccentrically connected to the drive shaft of the motor.
2. Device according to claim 1, wherein the cylinder slides on an annular sealing membrane supported by the
15 piston.
3. Device according to claim 2, wherein the cylinder comprises a hollow head which houses the piston so as to slide and a stem extending from said head for connection of the cylinder to the drive shaft.
- 20 4. Device according to claim 3, wherein said stem is made in one piece with said hollow head, and wherein said annular sealing membrane is elastically deformable so as to compensate the oscillatory movement of the cylinder.
- 25 5. Device according to any one of the previous claims, wherein the air intake and delivery means comprise intake

and delivery passages suitable for placing the cylinder chamber in fluidic communication respectively with the outside environment and with a delivery connector, connectable to a delivery pipe, to each of said intake and delivery passages being associated a check non-return valve.

5 6. Device according to claim 5, wherein the piston comprises a piston body in which the air intake and delivery passages are made at least partially and defining a valve seat in which said passages are open
10 towards the cylinder chamber, a valve element housed in said seat acting as a check non-return valve for each of said passages and a sealing plug of said valve seat able to hold the valve element in the valve seat and having
15 intake and delivery apertures able to place the cylinder chamber in fluidic communication respectively and alternatively with the intake and delivery passages.

7. Device according to claim 6, wherein the annular sealing membrane is positioned and held between said
20 piston body and said plug.

8. Device according to claim 6, wherein the annular sealing membrane is made in one piece with said piston plug.

9. Device according to any of the claims 6-8, wherein
25 the valve element is a membrane comprising two flexible

tabs each closing a respective aperture in the sealing plug or a respective passage in the piston body and wherein at either the passage or relative aperture the valve seat or plug has an inclined rib suitable to enable flexing of the respective tab and therefore the opening of the aperture or passage, during the air intake or delivery phase.

10. Device according to any of the previous claims, comprising a cooling fan of the compressor group fitted on the drive shaft.

11. Device according to claim 10, wherein said fan is fitted on the end of the drive shaft projecting from the motor on the side facing the cylinder, said fan having a hub with a hole in an eccentric position in which a peg for attachment to the cylinder is housed.

12. Device according to claim 11, wherein the fan comprises, in a position diametrically opposite the eccentric hole, a blade which is thicker than the other blades so as to act as a balancing mechanism for the transmission of the movement from the drive shaft to the cylinder.

13. Device according to any of the claims 3-12, wherein in the stem of the cylinder there is a lubrication tank open at the end connected to the drive shaft and containing a lubrication liquid which is gradually

released in a controlled manner to lubricate the parts in contact of said stem and said drive shaft.

14. Device according to any of the claims 6-13, wherein the piston body is in one piece with the casing.

1/6

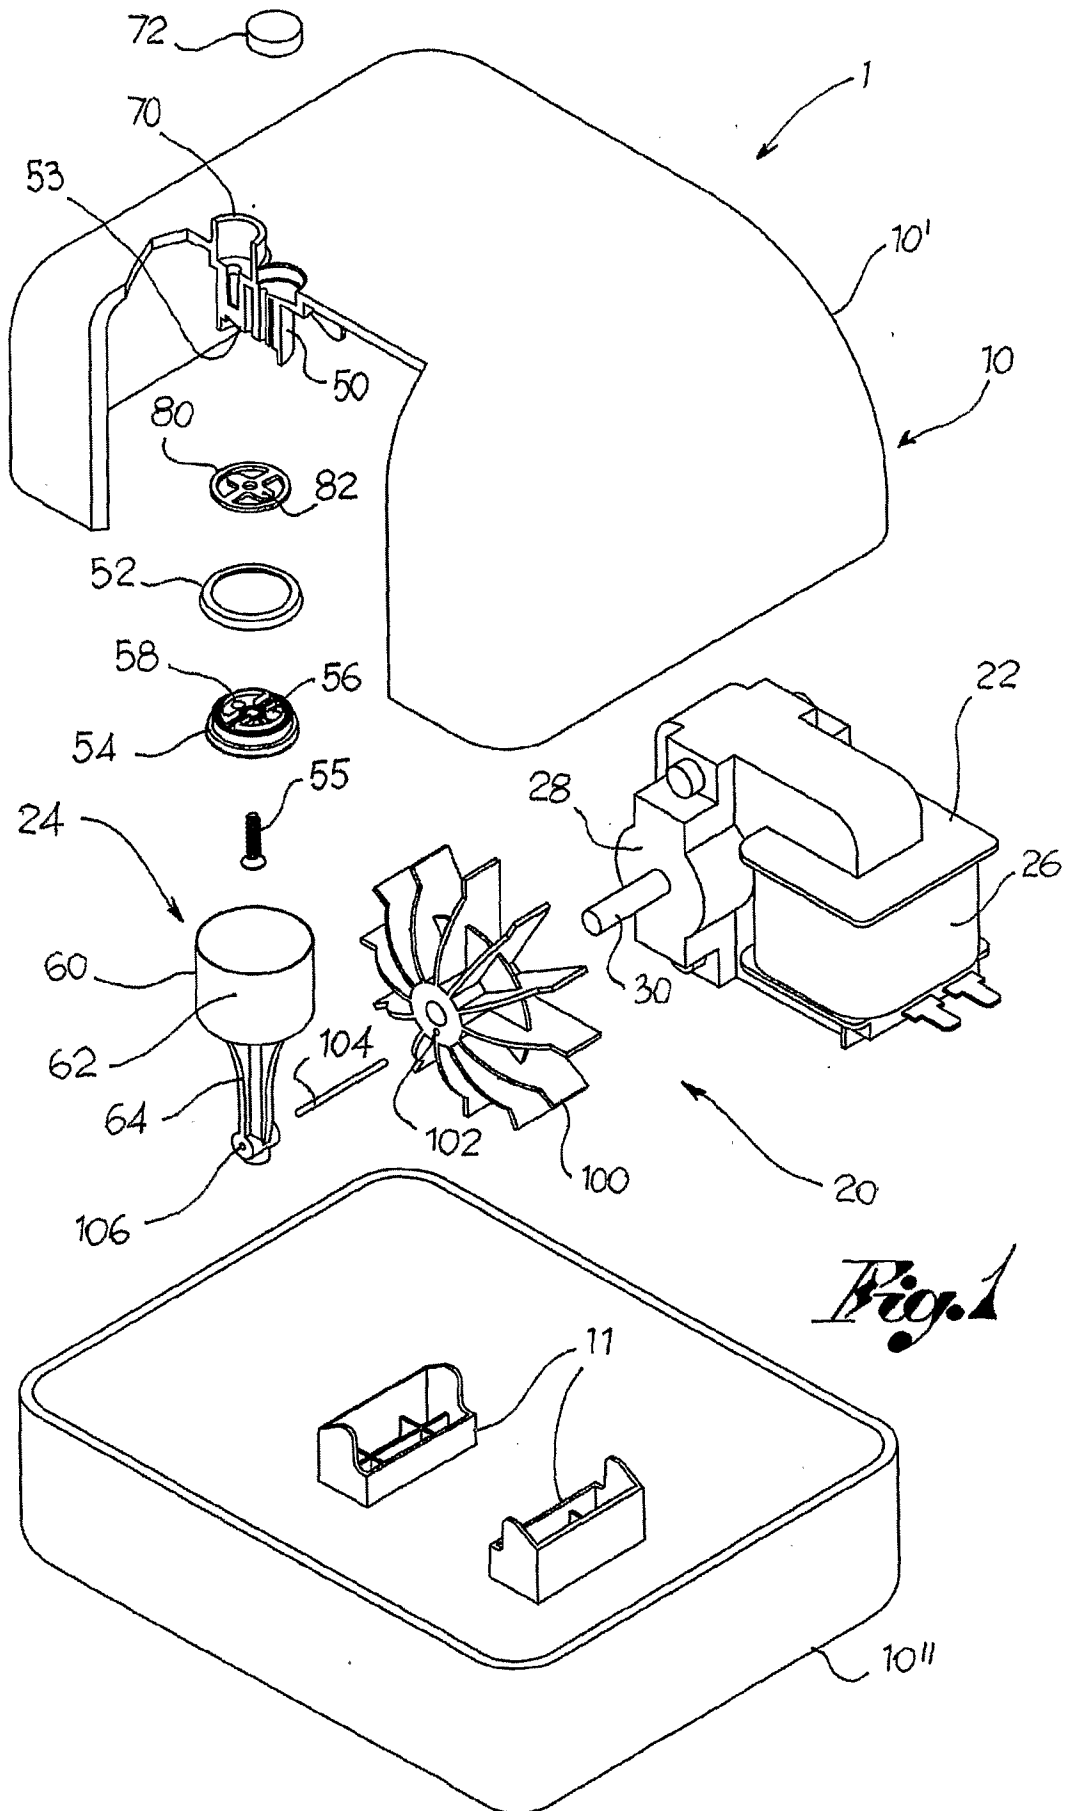


Fig. 1

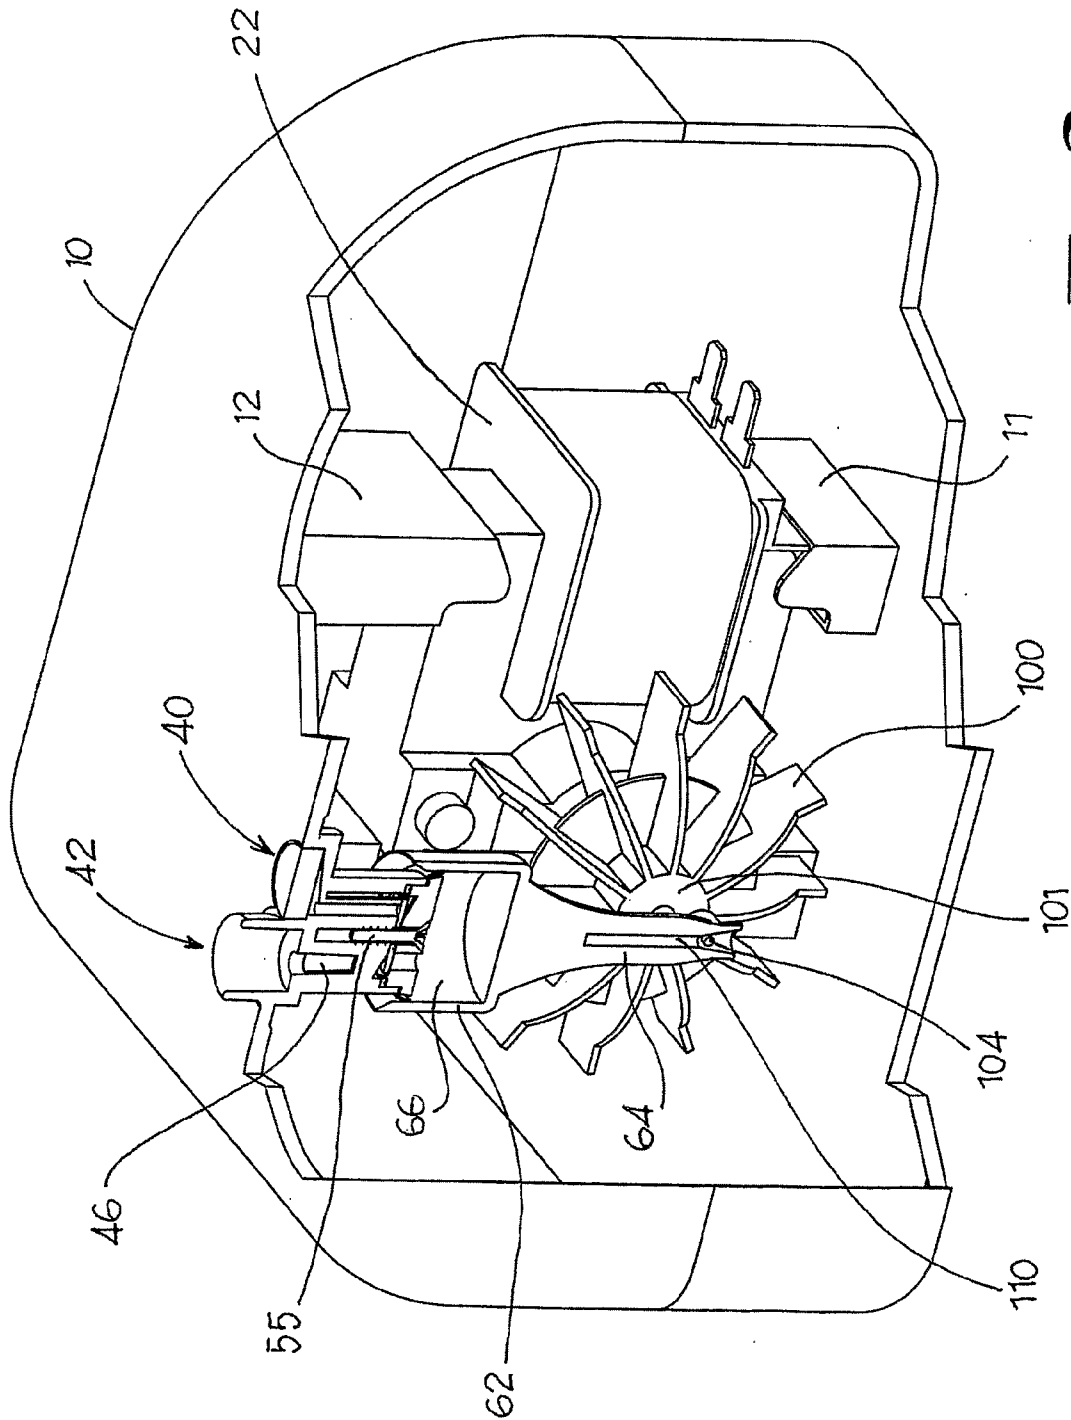


Fig. 2

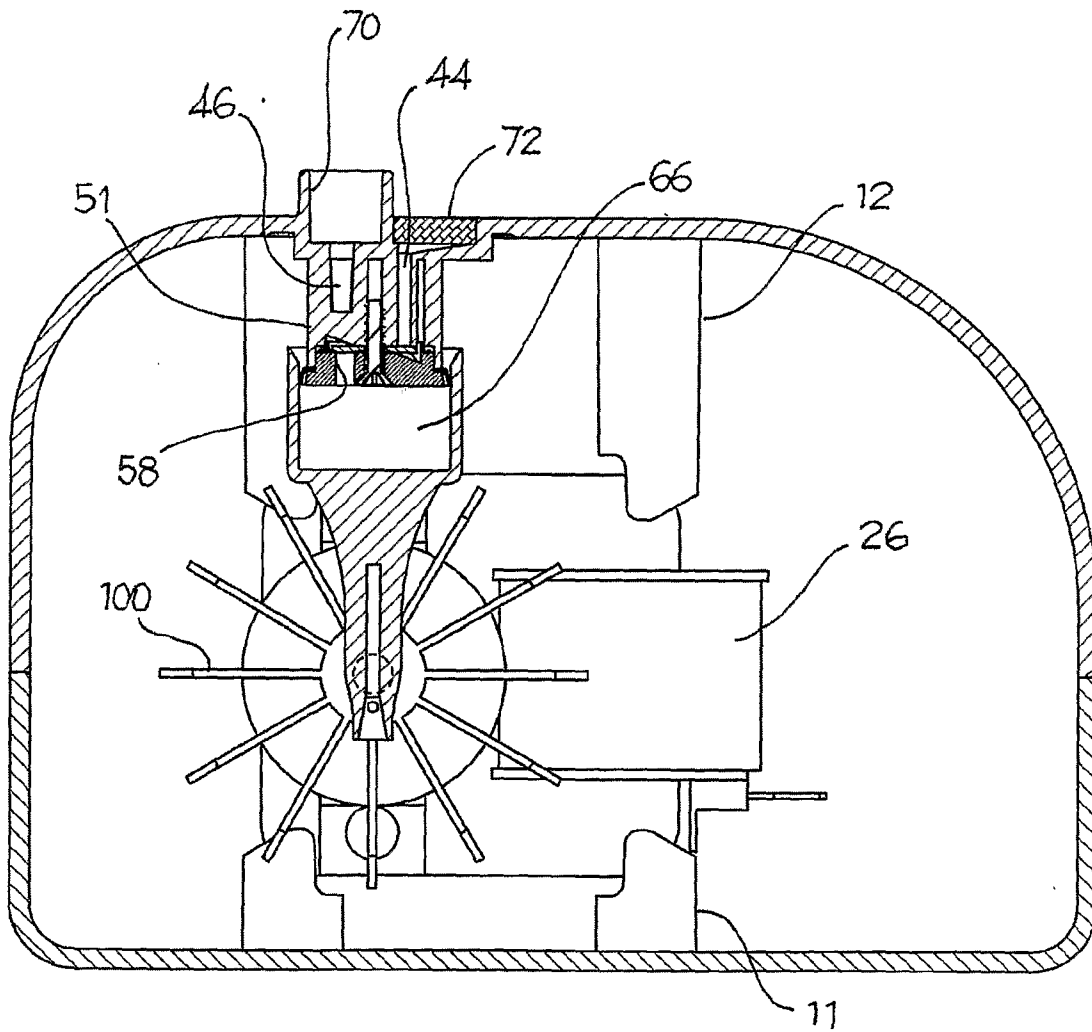


Fig. 3

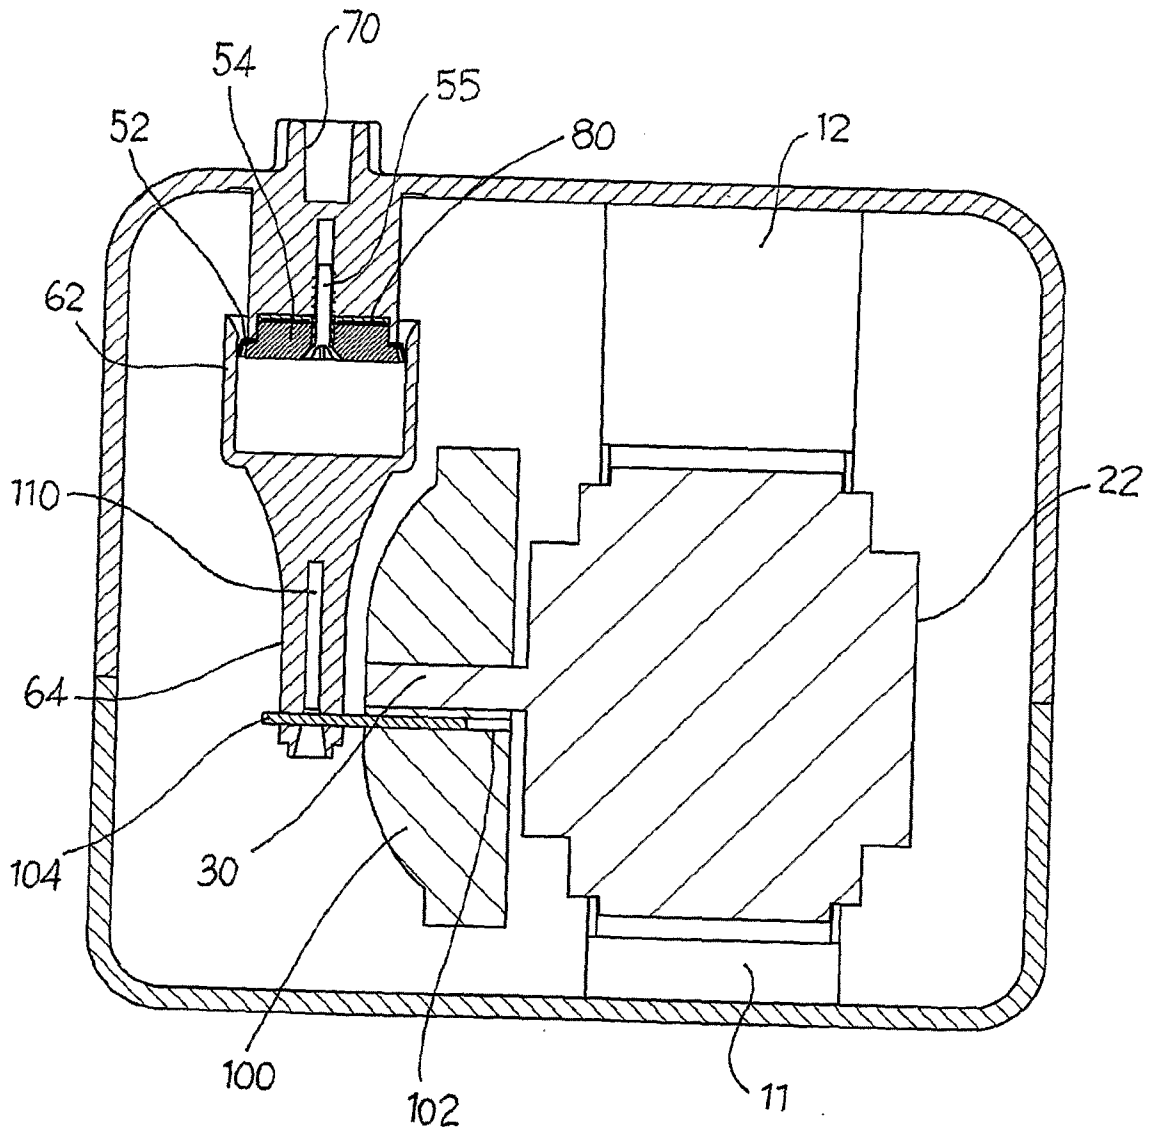


Fig. 4

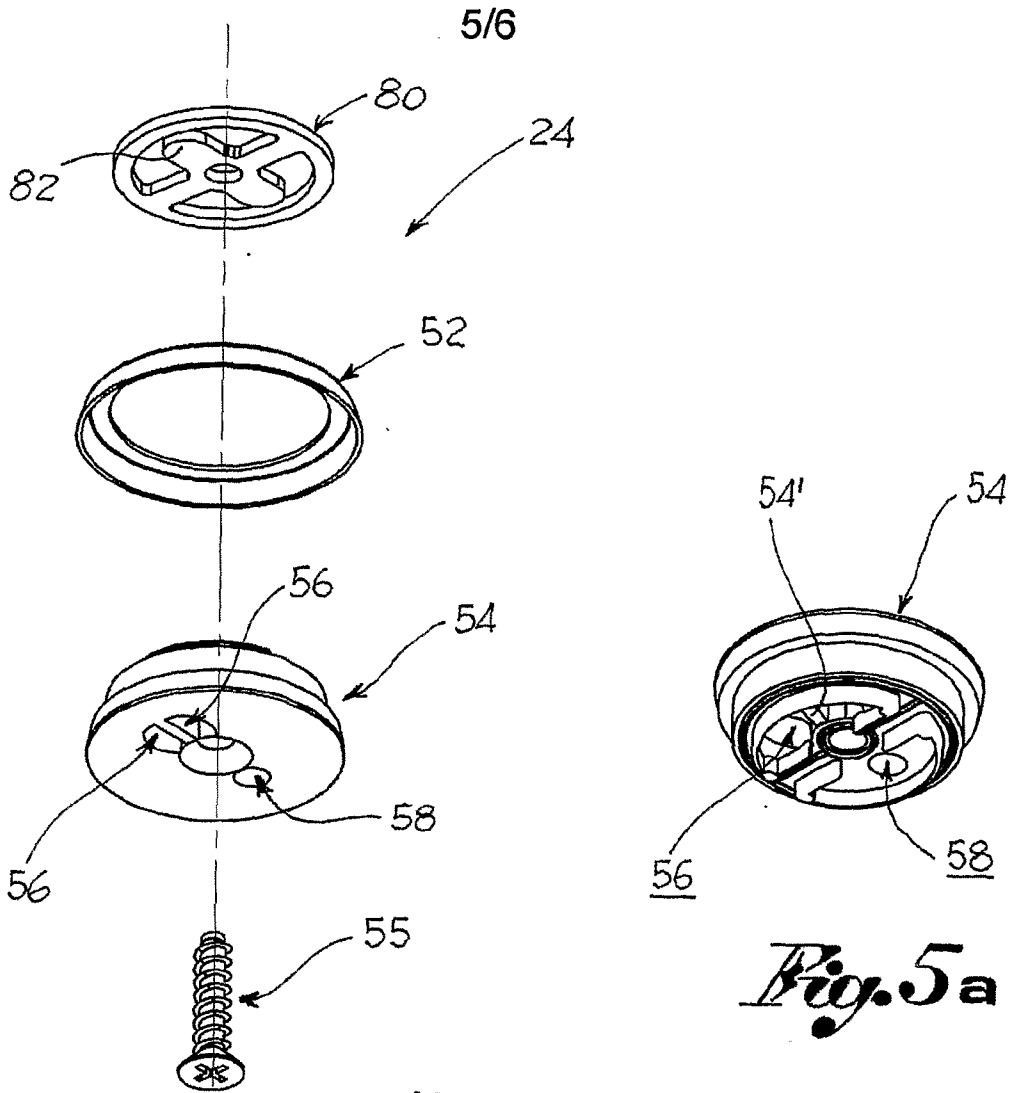


Fig. 5a

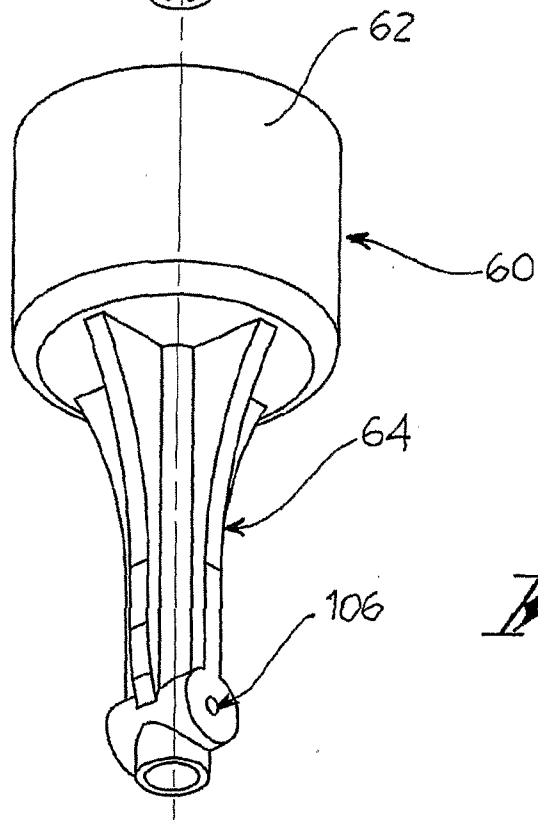


Fig. 5b

6/6

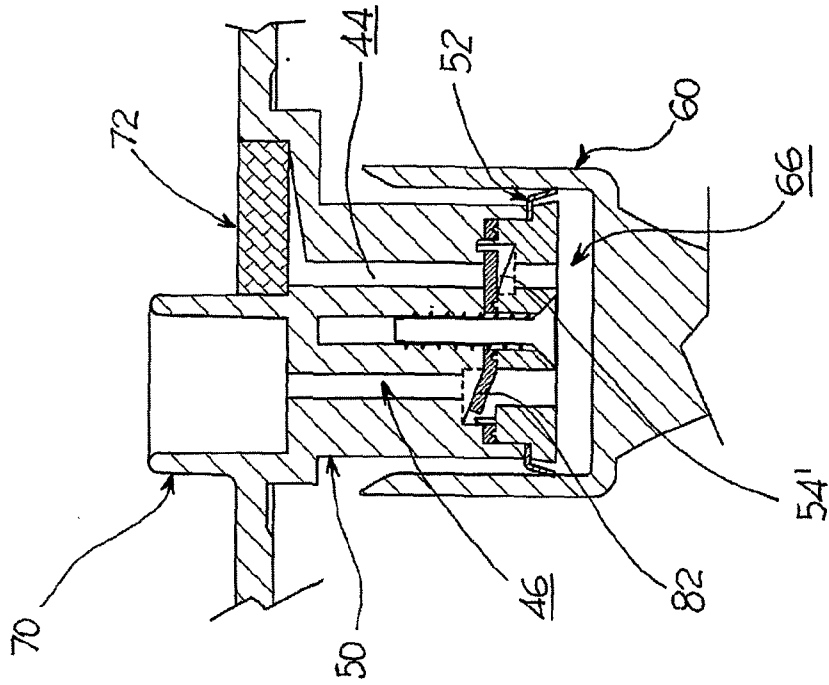


Fig. 6b

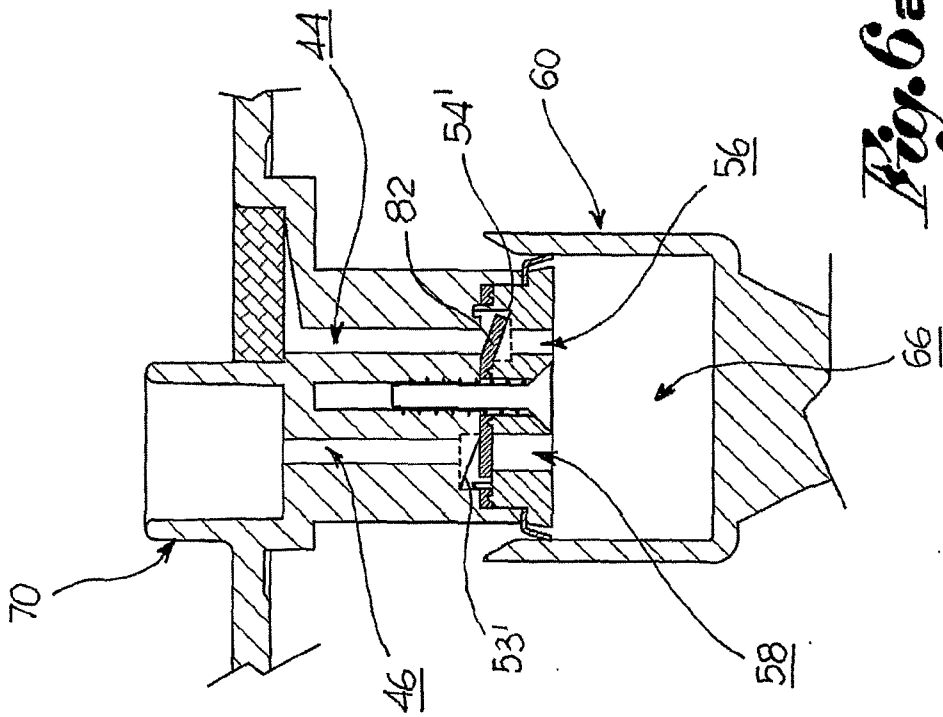


Fig. 6a

INTERNATIONAL SEARCH REPORT

International application No
PCT/IT2010/000284

A. CLASSIFICATION OF SUBJECT MATTER
INV. A61M11/02 A61M16/00
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
A61M F04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 2007/122578 A1 (AZZI MASSIMILIANO [IT]) 1 November 2007 (2007-11-01) the whole document -----	1

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

22 October 2010

Date of mailing of the international search report

03/11/2010

Name and mailing address of the ISA/
European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Borowski, Aleksander

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/IT2010/000284

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2007122578	A1	NONE	