

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
27 May 2010 (27.05.2010)

(10) International Publication Number
WO 2010/059781 A1

(51) International Patent Classification:
H01L 21/20 (2006.01)

(74) Agents: **CHAPMAN, Gary B.** et al.; Greenlee, Winner and Sullivan, P.C., 4875 Pearl East Circle, Suite 200, Boulder, CO 80301 (US).

(21) International Application Number:
PCT/US2009/065078

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(22) International Filing Date:
19 November 2009 (19.11.2009)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/116,136 19 November 2008 (19.11.2008) US


(71) Applicant (for all designated States except US): **SEMPRIUS, INC.** [US/US]; 4915 Prospectus Drive, Suite C, Durham, NC 27713 (US).

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM,

(72) Inventor; and
(75) Inventor/Applicant (for US only): **MENARD, Etienne** [FR/US]; 5215 Newhall Rd., Durham, NC 27713 (US).

[Continued on next page]

(54) Title: PRINTING SEMICONDUCTOR ELEMENTS BY SHEAR-ASSISTED ELASTOMERIC STAMP TRANSFER

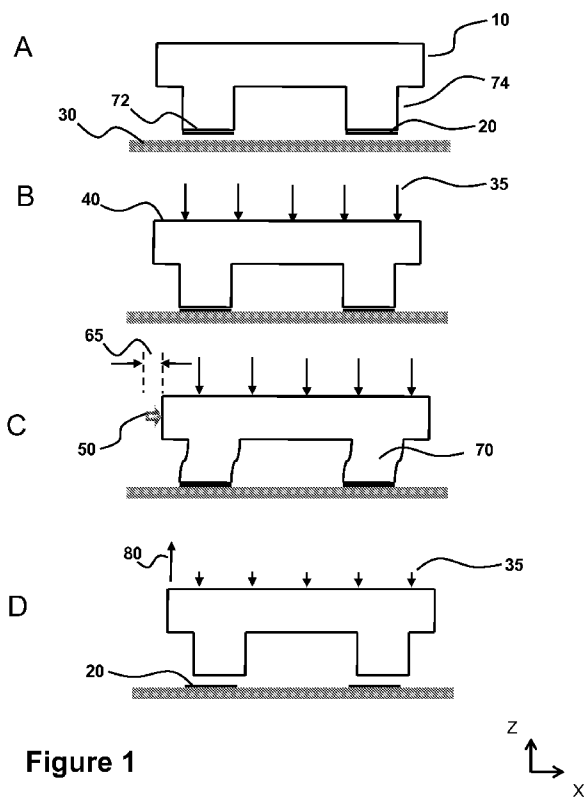

(57) Abstract: Provided are methods and devices for transfer printing of semiconductor elements to a receiving surface. In an aspect, the printing is by conformal contact between an elastomeric stamp inked with the semiconductor elements and a receiving surface, and during stamp removal, a shear offset is applied between the stamp and the receiving surface. The shear-offset printing process achieves high printing transfer yields with good placement accuracy. Process parameter selection during transfer printing, including time varying stamp-backing pressure application and vertical displacement, yields substantially constant delamination rates with attendant transfer printing improvement.

WO 2010/059781 A1

TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, — *before the expiration of the time limit for amending the
ML, MR, NE, SN, TD, TG).* *claims and to be republished in the event of receipt of
amendments (Rule 48.2(h))*

Published:

— *with international search report (Art. 21(3))*

PRINTING SEMICONDUCTOR ELEMENTS BY SHEAR-ASSISTED ELASTOMERIC
STAMP TRANSFER

5 **[0001]** This application claims the benefit of U. S. Provisional Patent Application No. 61/116,136 filed November 19, 2008, which is specifically incorporated by reference to the extent not inconsistent herewith.

STATEMENT REGARDING FEDERALLY SPONSORED
RESEARCH OR DEVELOPMENT

10 **[0002]** This invention was made, at least in part, with United States governmental support awarded by National Science Foundation Grant IIP-0712017. The United States Government has certain rights in this invention.

BACKGROUND OF THE INVENTION

15 **[0003]** Semiconductor chip or die automated assembly equipments typically rely on the use of vacuum operated placement heads often referred to as vacuum grippers or pick-and-place tools. In their simplest embodiment, these placement heads typically consist of an open ended cylinder having a drilled nozzle surface which seals to the die to accomplish physical attachment. Semiconductor chips or die which are ultra thin, fragile, or too small cannot be economically handled by conventional vacuum grippers. As a result, alternative approaches such as self-assembly or dry transfer printing technologies are being investigated.

20 **[0004]** Transfer printing enables the massively parallel assembly of high performance semiconductor devices onto virtually any substrate material, including glass, plastics, metals or other semiconductors (see, e.g., U.S. Pat. App. No. 11/145,574 METHODS AND DEVICES FOR FABRICATING AND ASSEMBLING PRINTABLE SEMICONDUCTOR ELEMENTS filed June 2, 2005). This semiconductor transfer
25 printing technology relies on the use of a microstructured elastomeric stamp to selectively pick-up devices from a source wafer and then prints these devices onto a target substrate. The transfer process is massively parallel as the stamps are designed to transfer hundreds to thousands of discrete structures in a single pick-up and print operation.

30 **[0005]** While pick-and-place tools rely on suction forces, dry transfer printing tools rely on surface adhesion forces to control the pickup and release of the semiconductor

devices. To enable dry transfer printing, methods to control the adhesion forces between the semiconductor elements and the elastomeric stamp are required. One such method is described in U.S. Pat. App. No. 11/423,192 filed June 9, 2006 titled "PATTERN TRANSFER PRINTING BY KINETIC CONTROL OF ADHESION TO AN ELASTOMERIC STAMP." In that method, the elastomeric stamp adhesion forces are controlled by adjusting the delamination rate of the elastomeric transfer stamp. This control of separation or delamination rate provides a means of increasing the stamp adhesion forces that are necessary to pickup semiconductor elements from a source wafer. There are problems, however, associated with transferring the semiconductor elements from the stamp to a receiving substrate with this technique. First, slow stamp delamination rates (< 1 mm/s) are often required to transfer semiconductor elements onto bare target substrates or substrates coated with a low tack surface adhesive. This increases processing time and impacts the ability to achieve high-throughput transfer printing. Second, stamps optimized for dry transfer printing semiconductor elements with high placement accuracy typically use a stiff backing layer. During the printing or transfer step, the delamination rate of those stamps can be unstable and difficult to control when the stiff backing layer(s) are subject to bending forces. Third, printing yields on surfaces that are not ultra smooth, or low tack surfaces, can be very low.

[0006] Accordingly, there is a need for an improved method for transfer printing semiconductor elements with high yield and placement accuracy, the method, system and process being scalable to large-size elastomeric stamps.

SUMMARY OF THE INVENTION

[0007] Provided are methods and systems for dry transfer printing of semiconductors and semiconductor elements by shear offset. Shear offset printing systems permit higher delamination rates to be achieved during transfer printing without sacrificing printing yield or accuracy, compared to conventional techniques that do not apply a shear offset. Accordingly, methods and systems presented herein provide faster and more reliable transfer printing, thereby reducing processing time and increasing printing efficiency.

[0008] Increasing shear offset during the delamination process increases transfer yields. Shear offset causes mechanical deformations in the transfer stamp used to transfer the semiconductor elements and, thereby, lowers the energy required to initiate delamination of the transfer stamp surface from the semiconductor element. Another

parameter important for good transfer yield (e.g., greater than 95% transfer) is constant delamination rate. Provided herein are techniques for optimizing a number of parameters to ensure delamination rate is constant with minimal deviations. For example, a stamp is designed to provide suitable delamination rate by optimizing one or more of composition of the deformable layer, geometry and pattern of relief features on the transfer surface of the deformable layer, Young's modulus, relative thickness of a rigid backing layer connected to the deformable layer. Other parameters that affect delamination rate include, but are not limited to, the rate at which the stamp is removed from the receiving substrate, as well as the force (e.g., pressure) used to establish conformal contact. In an aspect, each of these parameters varies over the course of the delamination cycle to minimize deviation of the delamination rate over the course of a printing step.

[0009] In an aspect, the invention is a method of printing a transferable semiconductor element, such as by providing an elastomeric stamp having a transfer surface. A semiconductor element is supported by the transfer surface. To further increase control and printing yield, the transfer surface that supports a semiconductor element may have a three-dimensional pattern of relief features that at least partially contacts the semiconductor element. The stamp "inked" with a semiconductor element if brought into conformal contact with a receiving surface, such that at least a portion of a semiconductor element contacts the receiving surface. The receiving surface is optionally at least partially coated with an adhesive layer. Alternatively, the receiving surface is not coated with an adhesive. Alternatively, the receiving surface is patterned with a pattern of adhesive regions. The elastomeric stamp is offset a horizontal distance relative to the receiving surface, thereby generating a mechanical deformation in at least a portion of the pattern of relief features, wherein the offset does not separate the semiconductor element from the transfer surface or the receiving surface. The location that drives the offset is not important (e.g., one or both of stamp and receiving surface may be offset), as long as there is an offset between the receiving surface and transfer surface. "Horizontal offset" refers to an offset that is substantially parallel to the plane or surface defined by contact between the inked contact surface and the receiving substrate. The stamp is separated from the receiving surface, thereby printing the semiconductor element to the receiving surface.

[0010] In an aspect, conformal contact step is established, at least in part, by applying air pressure to a top surface of the elastomeric stamp. For example, the stamp may be

brought into close proximity (e.g. about 100 μm or less) to the receiving surface, and air pressure applied to establish conformal contact. In the embodiment where the stamp is a composite stamp having a rigid backing layer, the top surface of the stamp corresponds to the top surface (e.g., exposed surface, or the surface that is opposite to the transfer surface). It is understood that "top" surface is a relative term used to distinguish the surface that is opposite the transfer surface, so that depending on the geometrical configuration of the system, the top surface may, in fact, be placed in a downward facing position.

[0011] Offsetting may be by any means known in the art, so long as the end result is the movement of the transfer surface relative to the receiving surface. In an embodiment, the offsetting is by application of an in plane displacement to the elastomeric stamp. In an embodiment, the in plane displacement is achieved by a horizontal displacement of the stamp top surface relative to the receiving surface that is greater than 5 μm and less than 100 μm .

[0012] In an aspect, the separating step comprises decreasing the air pressure applied to the stamp top surface. Alternatively, the separating step comprises physically moving the stamp in a vertical direction away from the receiving surface. In an aspect, the separating step comprises both decreasing the air pressure and movement in a vertical direction, such as simultaneously or in a sequential fashion.

[0013] In an embodiment, any of the stamps used in any of the processes or devices disclosed herein may be a composite stamp. In an aspect, the elastomeric stamp has an elastomeric layer with a top surface that is opposite the transfer surface and a rigid backing layer having a bottom surface, wherein the bottom surface is positioned adjacent to the elastomeric layer top surface. Such elastomeric stamps having a rigid backing layer are advantageous for transferring applied pressure and motion (e.g., vertical and/or horizontal) to the interface between the transfer surface and the inked semiconductor element and/or the receiving substrate surface. For example, air pressure applied to the rigid backing can be uniformly transmitted to the active printing area. In another aspect, the elastomeric stamp also has a reinforcement layer operably connected to the rigid backing layer, the reinforcement layer having an opening that vertically coincides with at least a portion of the relief features on the transfer surface.

[0014] In an aspect, any of the methods provided herein further include mounting an elastomeric stamp to a dry transfer printing tool. The offset step is optionally

accomplished by applying an in plane displacement to the dry transfer printing tool, thereby generating a mechanical deformation of at least a portion of the relief features. "In plane displacement" refers to offset that is in a substantially parallel direction to the interface that will be undergoing delamination. In this aspect, "substantially parallel" refers to a direction that is within 2° of the surface or plane defined by the interface.

[0015] In an embodiment of the invention, conformal contact is established, at least in part, by applying a pressure to a top surface of the mounted stamp, such as a top surface that is a rigid backing layer.

[0016] In aspects where the stamp is separated from the receiving surface by moving one of the surfaces in a vertical direction, such as moving the transfer printing tool mounted to the elastomeric stamp in a vertical direction relative to the receiving surface, any one or more parameters may be varied during the delamination cycle. For example, the pressure applied to the stamp may vary during the vertical direction movement that separates the stamp from the receiving surface. In an embodiment, the pressure may decrease from a maximum value to a minimum value, such as a maximum value between 4 kPa and 10 kPa and a minimum value between 0 kPa and 2 kPa. In an aspect, the pressure decrease rate and the vertical direction movement rate are selected to provide a delamination rate of the stamp posts from the receiving surface (or from the semiconductor elements that are supported by the receiving surface) that is substantially constant.

[0017] In an embodiment the relief features comprise a plurality of posts. The posts can help facilitate semiconductor element lift-off from a donor surface and/or semiconductor element transfer from the stamp to the receiving surface. In an aspect of this embodiment, the plurality of posts have a contacting area fraction on the transfer surface selected from a range that is greater than 1% and less than 25%. "Contacting area fraction" refers to the percentage of surface area coverage by the posts over the printable surface area region. In an aspect where the relief features comprise a plurality of populations, the relief features may further comprise a plurality of stabilization features interspersed between the posts, wherein said stabilization features have a contacting area that is less than the contacting area of the posts.

[0018] In an aspect, any of the methods provided herein are described in terms of a functional parameter including, but not limited to, a transfer printing yield. For example, the process may provide a yield that is greater than or equal to 99.5% for a receiving

surface that is coated with a thin layer of adhesive. Alternatively, the yield may be greater than or equal to 99.5% for stamp delamination rates that are greater than or equal to 1 mm/s.

5 **[0019]** In optional embodiments, any of the methods include optically aligning the stamp with the receiving surface, positioning the semiconductor elements to within less than or equal to 100 μm vertical separation distance from the receiving surface and applying a pressure to a top surface of the stamp to establish conformal contact between the stamp and the receiving surface. The pressure is applied by any means known in the art. For example, the pressure can be applied by application of a uniform
10 air pressure to the stamp top surface, including a top surface corresponding to a rigid backing layer.

[0020] Any of the methods disclosed herein may be used to print a single semiconductor element or a plurality of semiconductor elements, wherein the pattern of relief features support the single or plurality of semiconductor elements.

15 **[0021]** In an aspect, the transfer methods provided herein are for transfer printing semiconductor elements to a receiving surface that is a low-tack surface.

[0022] The separating step is by any means known in the art including, but not limited to, displacing the stamp relative to the receiving surface by applying a vertical offset to the stamp and/or to the receiving surface. The application may be direct or indirect,
20 such as by applying an offset to a structure that supports the surface. Similarly, the offsetting step is optionally provided by applying an in-plane displacement to the stamp, or applying an in-plane displacement to the receiving surface, applying in-plane displacements to both.

[0023] For aspects where air pressure is applied to at least partially establish said
25 conformal contact and the stamp is vertically separated from the receiving surface, each of the air pressure and vertical separation rate may vary over time during the delamination cycle. For example, in embodiments where the delamination cycle is divided into at least two time intervals, with the first interval is before the second interval, and does not substantially overlap, the air pressure may vary over the first time interval
30 while the vertical separation is maintained constant over this first time interval. In contrast, during the second time interval the air pressure may be maintained constant while the vertical separation increases during this second time interval. In this

embodiment, selection of the pressure and separation distance with respect to time is an optimization step that helps facilitate a constant delamination rate over the delamination cycle, such a delamination rate that deviates less than or equal to a user-specified deviation, such as less than or equal to 5% from an average delamination rate over the first and second time intervals.

[0024] Another aspect of the invention relates to devices for dry transfer printing of semiconductors to a receiving substrate, such as devices that are capable of implementing any of the shear-offset processes disclosed herein.

[0025] In an embodiment, the device supports a reinforced composite stamp having a deformable layer with an internal surface and an external surface positioned opposite the internal surface, the external surface of the deformable layer having a plurality of relief features. A rigid support layer is connected to the internal surface of the deformable layer, wherein the rigid support layer has a bottom surface and a top surface positioned opposite the bottom surface, wherein the bottom surface is positioned proximate to the internal surface of the deformable layer. A reinforcement layer is operably connected to the rigid support layer, the reinforcement layer having an opening that vertically coincides with at least a portion of the relief features of the external surface of the deformable layer. In an embodiment, the composite stamp is supported by a vertical section that operably connects a mounting flange to the deformable layer external surface. A transfer printing tool head having a receiving surface connects the mounting flange top surface. An actuator is operably connected to the mounting flange or the transfer printing tool head for generating a horizontal displacement between the deformable layer internal surface and the receiving surface. Accordingly, the actuator may displace the stamp or the receiving substrate, thereby achieving offset between the stamp and the receiving substrate.

[0026] Any actuator may be used, so long as a controllable offset is achieved. Examples of actuators include, but are not limited to displacement actuators such as motors, stepper motor, drivers, micropositioner, or piezoelectric actuator. Other examples of offset generator actuators may not directly control displacement, but instead affect a physical parameter that in turn results in offset such as a pressure generator, a temperature controller or electric voltage generator.

[0027] The plurality of relief features optionally comprises a plurality of posts distributed on the external surface. In an embodiment, a plurality of stabilization features are

distributed on the external surface, wherein the height of said stabilization features is less than the height of said posts. The stabilization features optionally comprise a first population and a second population, wherein each population has a geometric footprint and the first population geometric footprint is larger than the second population
5 geometric footprint. "Geometric footprint" refers to the effective surface area that faces the receiving surface.

[0028] In an aspect, the device further includes a variable pressure regulator operably connected to the rigid support layer of the composite stamp for controllably applying a positive pressure to a top surface of the rigid support layer. The applied pressure is
10 useful for establishing conformal contact between surfaces. In an embodiment, the pressure to a top surface is substantially uniform over the top surface of the rigid support layer. In an embodiment, although at a given time the pressure is substantially uniform, the pressure may with time, such as varying with the time of a delamination cycle.

[0029] Without wishing to be bound by any particular theory, there can be discussion
15 herein of beliefs or understandings of underlying principles or mechanisms relating to embodiments of the invention. It is recognized that regardless of the ultimate correctness of any explanation or hypothesis, an embodiment of the invention can nonetheless be operative and useful.

20 BRIEF DESCRIPTION OF THE DRAWINGS

[0030] **FIG. 1** is a process flow diagram with cross-section schematic views illustrating the steps to practice one embodiment of shear offset printing. **A** Align transfer printing stamp; **B** Laminate transfer printing stamp by applying air pressure on stamp backing; **C** Apply in plane shear on stamp posts by moving tool head by a given X and/or Y position
25 offset; **D** Delaminate stamp by moving tool head up in the Z direction and simultaneously decreasing air pressure applied on stamp backing.

[0031] **FIG. 2A** is one example of a three dimensional schematic of a composite stamp that may be used for shear offset printing.

[0032] **FIG. 2B** provides an illustration of a schematic cross-sections of various stamp
30 posts that may be used with shear offset printing.

[0033] FIG. 3 provides one example of a layout for relief feature on a transfer surface of an elastomeric stamp, including anti-sag and stabilization features.

[0034] FIG. 4A provides a schematic cross-section showing a reinforced composite stamp attached to a transfer printing tool head apparatus. **A** is the embodiment for shear offset to the print tool head; **B** is the embodiment for shear offset to the receiving substrate; **C** is a photograph of one embodiment of a transfer printing tool.

[0035] FIG. 5 is a graphical representation of silicon chiplets transfer printing yield as function of the shear offset applied on a reinforced composite stamp mounting flange as indicated by the arrows in FIG. 4A. The inset is a high resolution optical image of a 3x2 sub-array of transfer printed silicon chiplets.

[0036] FIG. 6A is a schematic illustration of a composite stamp model used to perform finite element simulations of a stamp post undergoing delamination from a substrate under applied forces.

[0037] FIG. 6B is the finite element simulation results of the stamp post delaminating from a substrate illustrated in FIG. 5A. The vertical displacement of the stamp internal mesh elements are represented using a contour plot.

[0038] FIG. 7A is a plot of the *in silico* results of the energy normalized to the maximum calculated energy necessary to delaminate a composite stamp post as a function of the shear offset applied on the stamp glass backing layer.

[0039] FIG. 7B is a plot of the *in silico* results of the delamination rate of a composite stamp post as a function of the shear offset applied on the stamp glass backing layer.

[0040] FIG. 8A provides a schematic illustration of a composite stamp model used to perform finite element simulations of a flat (non-structured printing surface) stamp delaminating from a substrate.

[0041] FIG. 8B provides finite element simulation results of the composite stamp of FIG. 7A delaminating from a substrate. The vertical displacement of the stamp internal mesh elements is indicated. To improve the figure clarity, the stamp deformed shape is magnified by a factor of 100.

[0042] FIG. 9A provides finite element simulation results of a composite stamp laminated edge length as a function of the air pressure applied on the composite stamp glass backing.

5 [0043] FIG. 9B provides finite element simulation results of a composite stamp laminated edge-length as a function of the vertical displacement of the stamp outer edges.

[0044] FIG. 10A provides model predictions of a pressure profile over time to achieve a constant delamination rate of 65 mm per normalized time unit of a composite stamp.

10 [0045] FIG. 10B provides model predictions of a vertical motion time course (e.g., rate of vertical separation between stamp edge and substrate) to achieve a constant delamination rate of a composite stamp.

[0046] FIG. 10C provides finite element simulation results of composite stamp delamination rate by plotting laminated edge length as a function of time (normalized), when optimized pressure and vertical motion profiles are implemented.

15

DETAILED DESCRIPTION OF THE INVENTION

[0047] "Printing" refers to a process of transferring a feature, such as a semiconductor element, from a first surface to a second surface. In an aspect, the first surface is a donor surface and the second surface a receiving surface, and the transfer is mediated by an intermediate surface such as a stamp having a transfer surface. In an aspect, the first surface is a transfer surface on a stamp to which one or more semiconductor elements are supported, and the stamp is capable of releasing the elements to a receiving surface on a target substrate, thereby transferring the semiconductor element. In an aspect, the printing is dry transfer printing of printable semiconductors, wherein the adhesive force between a solid object and the stamp surface is rate-sensitive.

25 [0048] "Stamp" refers to a component for transfer, assembly and/or integration of structures and materials via printing, for example dry transfer contact printing. Composite stamps, such as composite stamps disclosed in 12/177,963, filed Aug. 29, 2008, hereby incorporated by reference, are particularly useful for pickup and release/print systems, wherein the stamp can be first laminated or contacted with a donor substrate to pickup micro or nanostructures from that donor substrate and

30

subsequently brought into contact with a receiving substrate to which it transfers the micro- or nanostructures.

[0049] “Composite stamp” refers to a stamp having more than one component, such as more than one material. In an aspect, a composite stamp is made from a deformable layer and a rigid support layer, wherein the deformable and support layers have different chemical compositions and mechanical properties. The deformable layer optionally comprises a composite polymer layer, such as a reinforcement layer having a combination of one or more polymer and a fiber, such as a glass or elastomeric fiber, particulate, such as nanoparticles or microparticles or any combinations thereof.

[0050] The deformable layer may be an elastomer layer. “Elastomer” or “elastomeric” refers to a polymeric material which can be stretched or deformed and return to its original shape without substantial permanent deformation. Elastomers commonly undergo substantially elastic deformations. Exemplary elastomers useful in the present invention may comprise, polymers, copolymers, composite materials or mixtures of polymers and copolymers. Elastomeric layer refers to a layer comprising at least one elastomer. Elastomeric layers may also include dopants and other non-elastomeric materials. Elastomers useful in the present invention may include, but are not limited to, silicon containing polymers such as polysiloxanes including poly(dimethyl siloxane) (i.e. PDMS and h-PDMS), poly(methyl siloxane), partially alkylated poly(methyl siloxane), poly(alkyl methyl siloxane) and poly(phenyl methyl siloxane), silicon modified elastomers, thermoplastic elastomers, styrenic materials, olefinic materials, polyolefin, polyurethane thermoplastic elastomers, polyamides, synthetic rubbers, polyisobutylene, poly(styrene-butadiene-styrene), polyurethanes, polychloroprene and silicones.

[0051] “Supported” refers to a stamp that has received a semiconductor element, such as a micro or nanostructure that will form a semiconductor, on the stamp’s surface (e.g., transfer surface) such that the element is capable of being transferred to another surface (e.g., a receiving surface). “Inking” refers to the step of pickup or transfer of micro or nanostructures from a donor substrate to the stamp.

[0052] As used herein the expression “semiconductor element” and “semiconductor structure” are used synonymously and broadly refer to a semiconductor material, structure, device and/or component of a device. Semiconductor elements include high quality single crystalline and polycrystalline semiconductors, semiconductor materials fabricated via high temperature processing, doped semiconductor materials, organic

and inorganic semiconductors and composite semiconductor materials and structures having one or more additional semiconductor components and/or non-semiconductor components, such as dielectric layers or materials and/or conducting layers or materials. Semiconductor elements include semiconductor devices and device components including, but not limited to, transistors, photovoltaics including solar cells, diodes, light emitting diodes, lasers, p-n junctions, photodiodes, integrated circuits, and sensors. In addition, semiconductor element refers to a part or portion that forms an end functional semiconductor.

[0053] "Semiconductor" refers to any material that is a material that is an insulator at a very low temperature, but which has an appreciable electrical conductivity at a temperatures of about 300 Kelvin. In the present description, use of the term semiconductor is intended to be consistent with use of this term in the art of microelectronics and electronic devices. Semiconductors useful in the present invention may comprise element semiconductors, such as silicon, germanium and diamond, and compound semiconductors, such as group IV compound semiconductors such as SiC and SiGe, group III-V semiconductors such as AlSb, AlAs, AlN, AlP, BN, GaSb, GaAs, GaN, GaP, InSb, InAs, InN, and InP, group III-V ternary semiconductor alloys such as $\text{Al}_x\text{Ga}_{1-x}\text{As}$, group II-VI semiconductors such as CsSe, CdS, CdTe, ZnO, ZnSe, ZnS, and ZnTe, group I-VII semiconductors CuCl, group IV – VI semiconductors such as PbS, PbTe and SnS, layer semiconductors such as PbI_2 , MoS_2 and GaSe, oxide semiconductors such as CuO and Cu_2O . The term semiconductor includes intrinsic semiconductors and extrinsic semiconductors that are doped with one or more selected materials, including semiconductor having p-type doping materials and n-type doping materials, to provide beneficial electronic properties useful for a given application or device. The term semiconductor includes composite materials comprising a mixture of semiconductors and/or dopants. Specific semiconductor materials useful for in some applications of the present invention include, but are not limited to, Si, Ge, SiC, AlP, AlAs, AlSb, GaN, GaP, GaAs, GaSb, InP, InAs, GaSb, InP, InAs, InSb, ZnO, ZnSe, ZnTe, CdS, CdSe, ZnSe, ZnTe, CdS, CdSe, CdTe, HgS, PbS, PbSe, PbTe, AlGaAs, AlInAs, AlInP, GaAsP, GaInAs, GaInP, AlGaAsSb, AlGaInP, and GaInAsP. Porous silicon semiconductor materials are useful for applications of the present invention in the field of sensors and light emitting materials, such as light emitting diodes (LEDs) and solid state lasers. Impurities of semiconductor materials are atoms, elements, ions and/or molecules other than the semiconductor material(s) themselves or any dopants provided to the semiconductor material. Impurities are undesirable materials present in

semiconductor materials which may negatively impact the electronic properties of semiconductor materials, and include but are not limited to oxygen, carbon, and metals including heavy metals. Heavy metal impurities include, but are not limited to, the group of elements between copper and lead on the periodic table, calcium, sodium, and all ions, compounds and/or complexes thereof.

[0054] "Relief features" refer to protrusions, extensions or projections on the bottom surface or external surface of the deformable layer, such as a three-dimensional relief pattern, that facilitates dry-transfer printing of semiconductor elements from a donor substrate to a target substrate. In an aspect, the relief features of the deformable layer define a printable surface area. "Printable surface area" or "region" refers to that portion of the stamp used to transfer structures from a donor substrate to a target substrate. "Active surface region" is used interchangeably with "printable surface region." A "pattern of relief features" refers to a plurality of features, including a plurality of nanostructures or microstructures, such as an array of features. The relief features may in turn be made from a plurality of distinct populations, with each population designed to serve a specific function. For example, one population may comprise printing posts for facilitating lift-off and transfer of semiconductor elements. Another population may comprise stability features for ensuring the stamp does not sag, buckle or otherwise undergo unwanted deformations during lamination and/or delamination with the receiving substrate surface. In an aspect, each population has different geometry, dimensions such as height, length or width, or is made from a material resulting in, for example, a different physical parameter such as an effective Young's modulus for that population. In an aspect, a population comprises a plurality of sub-populations.

[0055] "Lamination" refers to the process of bonding layers of a composite material or a process of producing contact between a first material or layer and a second layer or material (e.g., such as between the rigid backing and reinforcement layer, rigid backing and deformable layer, reinforcement layer and deformable layer, semiconductor element and transfer surface or receiving surface, for example). "Delamination" refers to the stamp transfer surface-semiconductor element separation or the stamp transfer surface-receiving substrate separation. In particular, for embodiments where the stamp has relief features that are printing posts inked with semiconductor elements, delamination rate refers to separation of the printing post surface from the semiconductor elements. Delamination rate may refer to a single post surface delaminating from an individual semiconductor element. Alternatively, delamination rate may refer to a spatially-

averaged rate for all post surfaces within the printable surface region. In general, processes provided herein facilitate high transfer yield and placement accuracy for delamination rates that are substantially higher than conventional techniques. For example, the delamination rate may be two times higher, or as much as ten times higher for a shear-offset process, compared to conventional techniques without shear, without any measureable impact on transfer yield or placement accuracy.

[0056] “Substantially constant” refers to a variable that varies less than 10% compared to an average value. For example, a substantially constant delamination rate refers to a rate that varies less than 10% from an average rate over the delamination cycle.

10 Substantially parallel refers to a direction that is at least within 10% of true parallel.

[0057] “Substrate” refers to a structure or material on which, or in which, a process is conducted, such as patterning, assembly and/or integration of semiconductor elements. Substrates include, but are not limited to: (i) a structure upon which semiconductor elements are fabricated, deposited, transferred or supported; (ii) a device substrate, for example an electronic device substrate; (iii) a donor substrate having elements, such as semiconductor elements, for subsequent transfer, assembly or integration; and (iv) a target substrate for receiving printable structures, such as semiconductor elements.

[0058] “Placement accuracy” refers to the ability of a pattern transfer method or device to generate a pattern in a selected region of a substrate. “Good placement” accuracy refers to methods and devices capable of generating patterning in a select region of a substrate with spatial deviations from the absolutely correct orientation less than or equal to 5 microns, particularly for generating patterns of semiconductor elements on target substrates.

[0059] “Operably connected” refers to a configuration of layers and/or device components of composite patterning devices of the present invention such that functionality of the components or layers are preserved when connected. Operably connected layers or device components, refers to an arrangement wherein a force applied to a layer or device component is transmitted to another layer or device component. Operably connected layers or device components may be in contact, such as layers having internal and/or external surfaces in physical contact. Alternatively, operably connected layers or device components may be connected by one or more connecting layers, such as thin metal layers or reinforcement layers, positioned between the internal and/or external surfaces of two layers or device components, or that run

between two or more layers or components. In an embodiment, a rigid layer and a reinforcement layer are “operably connected” such that the stamp with the reinforcement layer is capable of withstanding a higher activation force without bowing or having the rigid layer fracturing or otherwise damaged compared to a stamp without the reinforcement layer.

[0060] The invention may be further understood by the following non-limiting examples. All references cited herein are hereby incorporated by reference to the extent not inconsistent with the disclosure herewith. Although the description herein contains many specificities, these should not be construed as limiting the scope of the invention but as merely providing illustrations of some of the presently preferred embodiments of the invention. For example, thus the scope of the invention should be determined by the appended claims and their equivalents, rather than by the examples given.

[0061] Processes provided herein achieve a high transfer printing yield of printable semiconductor elements with increased accuracy. Methods disclosed herein release printable semiconductor elements from the surface of a transfer printing stamp to the surface of a target substrate and overcome challenges presented by the significant adhesiveness of substrates used in conventional transfer printing. Adhesiveness of substrate surfaces slows delamination, adversely affects transfer quality and reduces overall transfer yields. Methods and devices presented herein permits transfer printing of printable semiconductor elements on substrates having a low tack surface and the realization of high speed printing of printable semiconductor elements with controlled and optimized transfer stamp delamination rates. The methods, systems and processes are scalable to various size elastomeric stamps and to various size donor, receiving or target substrates. A series of multi-facet and controlled tests demonstrate the advantages and performance merits of the disclosed devices and transfer printing methods, as evident through the descriptions, exemplary embodiments and figures that follow.

[0062] **Fig. 1** illustrates the steps used in one embodiment of the invention for controlling the delamination of a transfer printing stamp. First the stamp **10** is populated with an array of printable semiconductor elements **20** using standard procedures as described in published dry transfer printing literature (see, e.g., US Pat. App. 11/145,574 to Khang et al.). In an aspect, the semiconductor elements **20** are on a printing surface **72** corresponding to an external surface of a three-dimensional pattern of relief features

74. The stamp is brought into close proximity (i.e. within $< 100 \mu\text{m}$) to a receiving substrate surface **30** (**Fig. 1A**). After precise optical alignment of the stamp **10** to the receiving substrate **30**, the stamp is brought into conformal contact with the substrate by application of uniform air pressure **35** onto the stamp backing top surface **40** (**Fig. 1B**).

5 Then, an in plane shear force **50** (e.g., applied in a direction substantially parallel to the x-y plane) is applied to the stamp by moving the tool head apparatus (holding the stamp) by a precise displacement offset (away from the aligned position) **65** and/or to the receiving substrate by a precise displacement of the receiving substrate (**Fig. 1C**). In this aspect, the shear force or displacement **50** can be applied to the stamp, the

10 receiving surface, or both, so long as the result is an in plane displacement or shear offset **65** between the stamp and the receiving surface, without prematurely entirely breaking conformal contact between the inked stamp and the receiving surface, as shown in **Fig. 1C**. This shear force is transmitted to the stamp bottom surface, causing some elastic mechanical deformation of the stamp printing posts **70**. Finally, the stamp

15 is delaminated from the receiving substrate by moving the stamp **10** in the vertical (Z) direction **80** relative to the receiving surface **30** and simultaneously decreasing the air pressure **35** applied on the stamp backing (**Fig. 1D**). Vertical motion is indicated by the arrow **80** in the vertical direction where vertical motion can be controlled by moving the stamp **10**, moving the substrate **30**, or moving both relative to each other. Decrease in

20 air pressure is represented by the decrease in the magnitude of arrows **35**.

[0063] **Fig. 2A** presents a three dimensional schematic of a composite stamp **10** that facilitates uniform transfer of an applied in-plane shear force (by the rigid stamp backing layer) over the entire surface of the stamp. The composite stamp is made of a rigid backing layer **201** connected to a top surface **205** of elastomeric layer **202** having relief

25 **70** and recess **104** features. The different stamp dimensions such as the glass backing layer thickness **230**, the elastomeric layer thickness **231**, the stamps printing posts pitch in the X (**211**) and Y direction (**221**), the stamp printing posts width and length (**210**, **220**) and the stamp printing posts height (**212**) each can influence the effect of the applied shear force and are optionally optimized to provide high yield and accurate

30 transfer printing by the shear-offset methods disclosed herein. In an aspect, any one or more of these parameters are selected to achieve a desired transfer yield, placement accuracy and/or delamination rate constancy. The Young's modulus of the elastomer layer **202**, shape of the stamp posts **70** (**Fig. 2B**) are optionally adjusted to maximize the efficiency of the shear assisted stamp release method. In an aspect, any one or more of

35 these parameters are selected to achieve a desired transfer yield and/or placement

accuracy. For example, **Fig. 2B** provides examples of four different post shapes: standard (having a selectable height **212**, width **210**, length (not shown)), suction cup and re-entrant profiles.

[0064] **Fig. 3** presents a typical layout for a stamp post array including printing posts **(70)** and stabilization features **(320)**, such as anti-sag features **310**. The printing posts **70** are designed to support the printable semiconductor elements during the transfer printing cycle. The anti-sag features **(310)** are designed to support the recessed areas of the stamp **(104)** in order to avoid contact between these recessed areas and the surface of the donor/receiving substrates. Accordingly, in an embodiment, the anti-sag features have a height that is less than the height **212** of the printing posts shown in **Fig. 2B**. The stabilization features **(320)** can prevent buckling of the stamp surface, printing posts **70** or anti-sag features **310** when any of the features have, for example, high aspect ratios (i.e., height/width > 1).

[0065] A schematic illustration of a device capable of providing shear offset printing of semiconductor elements is provided in **Fig. 4**. A composite stamp, such as any of the composite stamps disclosed in 12/177,963, filed Aug. 29, 2008, is connected to a print tool head **500**. Further detail of tool head **500** is provided in 12/177,963, which is hereby specifically incorporated by reference for the composite stamps, devices for holding the composite stamps and printing processes, for example. A reinforced composite stamp **400**, such as disclosed in 12/177,963, is made of a rigid backplane layer **201**, connected to an elastomeric layer **202** having a relief pattern **74** that faces the receiving substrate surface **30**, along with a reinforcement layer **410** in the elastomer layer and/or between the elastomer layer and rigid backing layer. Actuator **420** is any device known in the art capable of providing a controlled displacement, such as an in plane displacement. Pressure controller **430**, such as an air pressure controller, provides controllable force application onto the stamp top surface **40** by application of a user-selectable uniform pressure **35** over the stamp top surface **40**. In **Fig. 4A**, shear offset is provided by an in plane displacement of the stamp by in plane displacement of tool head **500** to which the composite stamp **400** is connected. Alternatively, shear offset is provided by in plane displacement of the receiving substrate **30** relative to the composite stamp **400**, as shown in **Fig. 4B**. As used herein, "in plane displacement" refers to displacement in the x-y plane, as indicated by the xyz axis in **Fig. 4**. A displacement is said to be "in plane" if the direction of displacement is within 10%, within 5% or within 1% of parallel to the plane formed by the x-y axis shown in **Fig. 4**.

[0066] Fig. 5 provides transfer yield of chiplets from a reinforced composite printing stamp (schematically represented on Fig. 4A) to a receiving surface. The reinforced composite stamp is mounted on a dry transfer printing tool (shown in Fig. 4C). A receiving glass substrate is coated with a thin layer of BCB (Cyclotene, Dow Chemical Co.). Each data point in Fig. 5 represents the average transfer yield of four successive dry transfer print of an array of 256 silicon chiplets, corresponding to a total of 1,024 chiplets per data point on the graph. For all experiments, the silicon chiplets have the following physical dimensions: length = 167 μm , width = 50 μm , thickness = 5 μm . The inset of Fig. 5 is an optical image of six transfer printed silicon chiplets. These silicon chiplets have an array of 13 metal interconnection pads on their top surface. The stamp has an array of 16x16 posts with the following physical dimensions: posts pitch = 185x185 μm , posts length = 167 μm , width = 50 μm , thickness = 40 μm . The stamp has a glass backing layer with the following physical dimensions: disk diameter = 76.2 mm, thickness ~200 μm . The reinforcement layer of the stamp is a ring of woven fiberglass consisting of Style 120 E-Glass fiberglass fabrics having a weight density of ~3 Oz/ Yd², and an average thickness of 90-115 μm , with a 4-Harness Satin style weave pattern. The reinforcement ring is laser cut into a perforated ring shape having the following physical dimensions: inner diameter of 54 mm, outer diameter of 120 mm, hole diameters of 2 mm. A constant shear offset is applied on the reinforced composite stamp mounting flange throughout the entire stamp delamination step. A different shear offset value is used in each experiment, resulting in an average transfer printing yield that varies with offset, as summarized in Fig. 5. A shear offset of zero corresponds to a conventional transfer printing process that does not use any shear offset. These results indicate that the shear force transferred to the stamp transfer printing posts provides a significant increase in transfer printing yields, including the chiplets transfer printing yields. Fig. 5 indicates that, under these experimental conditions, providing a shear offset of 50 μm increases semiconductor transfer yield from 95% to greater than 99.5%.

[0067] In order to better understand the physical mechanism underlying this process, finite element simulations are performed. Fig. 6A presents a schematic view of the model used to study the delamination of a single printing post. A shear offset **50** and a uniform force **801** is applied to the rigid stamp layer **201** that is connected to the elastomeric layer **202** having a printing post **70** with an evolving contact interface **500** between the printing face of the stamp and the receiving substrate **30**. A non linear force boundary condition is used to model the evolving contact interface **500** between a stamp printing post and a target substrate. In order to facilitate convergence of the Newton-

type iterative algorithms used by the simulation software, a low-order boundary condition is used:

$$F(z) = \frac{A}{(z+B)^3} - \frac{C}{(z+D)^2}$$

[0068] This boundary condition does not precisely model the Van-der Waals and short range repulsion forces present at the stamp-substrate interface, but is nevertheless sufficient to appropriately predict the shape of a delaminating printing post. **Fig. 6B** presents a screen shot copy of a simulation run obtained for the case of a printing post (50 um wide, 40 um tall) delaminating from a substrate for a shear offset of 10 um applied to the (200 um thick) stamp glass backing layer with a portion of interface **500** having delaminated length **610**.

[0069] Analysis of the simulation results indicates the shear offset delamination process disclosed herein is effective with respect to two different aspects. Firstly, shear offset is an effective process for controlling the delamination rate, and particularly the delamination rate of stamp printing posts from the target or receiving substrate. **Fig. 7B** presents the variation of the stamp printing post delamination rate ratio as a function of the shear offset applied on the stamp glass backing layer. "Delamination rate ratio" refers to the horizontal displacement of the posts delamination front per vertical displacement of the stamp glass backing layer. These in silico results reveal that the application of a shear offset on the stamp glass backing causes a substantial decrease of the stamp printing post delamination rate, and corresponding decrease in the energy required to delaminate the stamp (see **Fig. 7A**). Slower and steady stamp delamination rates typically result in higher printing yields on most surfaces. Application of shear offset, however, allows higher delamination rates to be achieved, without sacrifice of printing yield, compared to conventional techniques that do not apply a shear offset.

[0070] Even when stamps are delaminated at slow peel rates, it is difficult to obtain high transfer printing yields on surfaces typically encountered on plastic substrates, particularly for those surfaces that are not ultra-smooth. The "shear" method disclosed herein significantly enhances printing yields, as the energy required to separate the printing post from the target substrate can be minimized (see **Fig. 7A**). A significant fraction of this energy is stored as mechanical strain energy in the deformed stamp printing post. **Fig. 7A** presents the variation of the normalized energy to delaminate a stamp printing post as a function of the shear offset applied on the stamp glass backing.

This energy is obtained by integrating the work done by the boundary forces at the interface between the stamp printing posts and the chiplets. These in silico results suggest that the minimization of the work of adhesion (energy to delaminate the deformed stamp printing posts) is responsible for the experimentally observed enhancement of the transfer printing yields.

[0071] In order to obtain high transfer printing yields, it is desirable to maintain steady delamination rates of the transfer printing stamps. Finite element simulations are performed to analyze the variation of the stamp delamination rate when a composite stamp is delaminated from a target substrate. **Fig. 8A** is a schematic illustration of the stamp system used to study delamination for a flat transfer surface geometry. The same non linear force boundary condition is used to model the evolving contact interface **500** between the stamp transfer surface on the outside surface of elastomeric layer **202** that is connected to rigid backing layer **201** and the target substrate receiving surface **30**. The outside edges **803** of the stamp glass backing layer **201** are subject to forced position boundary conditions ($\Delta x=0, \Delta z$). A uniform pressure (e.g., a force **801** per unit area) is applied on the top surface **40** of the composite stamp glass backing (corresponding to an applied force **801**), simulating the action of air pressure that is applied to the top surface of the stamp (e.g., the top surface of the rigid backing layer). This study is conducted for a composite stamp without any relief features (e.g., flat transfer surface) in order to obtain a continuous variation of the stamp delamination front. This specific case also simplifies the analysis and reduces the complexity of the computer model mesh. **Fig. 8B** presents a coded plot of a composite stamp of **Fig. 8A** delaminating **610** from a substrate receiving surface **30**. The stamp deformation is magnified by a factor 100 in order to emphasize the shape of the stamp sections delaminated **610** from the substrate **30**. The modeled composite stamp has: width of 100 mm, glass backing thickness of 200 μm , elastomeric layer thickness of 200 μm . In this specific case, the stamp edges **803** are forced to move vertically 100 μm from the target substrate **30**. A uniform pressure of 0.5 kPa is applied on the composite stamp glass backing top surface **40**.

[0072] Two different parametric simulations are conducted so as to decouple the influence of the air pressure and the vertical motion of the stamp glass backing edges on the delamination of the stamp. First, the stamp glass backing outside edges **803** are kept at a fixed Z-offset position (100 μm vertical separation from the target substrate **30**)

and the air pressure force applied on the glass backing is progressively decreased from 5 kPa to 0.5 kPa.

[0073] **Fig. 9A** presents the variation of the stamp laminated edge length **801** (see **Fig. 8B**) as a function of the applied air pressure. “Laminated edge length” refers to the length of stamp in conformal contact with the target or receiving substrate **30**. During the process of shear-offset printing, the laminated edge length decreases from a maximum at the beginning of the transfer to zero when the stamp is vertically displaced from the receiving substrate. These results indicate that the stamp laminated edge length rapidly decreases when the applied air pressure drops below 1 kPa. It is, therefore, desirable to maintain some level of residual air pressure on the composite stamps during the delamination step in order to avoid a sudden variation of the stamp wetting from delamination rate. In **Fig. 9A**, the air pressure applied to the glass backing is maintained constant (0.5 kPa) and the stamp glass backing outside edges **803** are progressively moved away from the target substrate in a vertical direction.

[0074] **Fig. 9B** presents the variation of the stamp laminated edge length **801** as function of the stamp glass backing outside edge vertical displacement (relative to the receiving substrate surface). These results indicate that the stamp laminated edge length quickly decreases during the initial motion of the glass backing outside edges away from the substrate. It is thus desirable to maintain higher air pressure forces on the composite stamp during the beginning of delamination step in order to avoid a sudden variation of the stamp wetting from delamination rate. This suggests it can be beneficial to apply a time-varying pressure to the top surface of the stamp, specifically the top surface of the rigid backing layer that decreases from an initial maximum value.

[0075] In summary, these in silico results suggest that to maintain better and more precise control over the composite stamp delamination rates it is preferable to control the air pressure applied on the composite stamp backing at the beginning of the delamination cycle and to control the vertical motion of the stamp glass backing outside edges at the end of the delamination cycle. Steady and constant stamp delamination rates can be obtained if the applied air pressure and outside edge vertical motion are properly modulated, thereby obtaining a substantially constant delamination rate with attendant improvement in transfer printing yield.

[0076] **Figs. 10A** and **10B** are exemplary protocols of modulating or optimizing air pressure and vertical displacement during a stamp delamination cycle, wherein the air

pressure (**Fig. 10A**) and the stamp edge vertical separation (**Fig. 10B**) change over time ($t=0$, start of the delamination cycle; $t=1$ end of the delamination cycle). During the first part of the delamination cycle the air pressure applied on the stamp glass backing is exponentially decreased and the stamp outside edges are maintained at a fixed Z position. During the second part of the delamination cycle the air pressure applied on the stamp glass backing is kept constant, at a relatively lower value, and the stamp outside edges are moved vertically away from the target substrate following a logarithm equation. **Fig. 10C** presents the time dependant variation of the stamp laminated length. The linear plot indicates that the delamination rate is substantially constant. These results indicate that steady stamp delamination rates can be obtained by selectively varying parameters, for example the pressure on the top surface of the stamp and the vertical separation distance, over time.

[0077] All references throughout this application, for example patent documents including issued or granted patents or equivalents; patent application publications; and non-patent literature documents or other source material; are hereby incorporated by reference herein in their entireties, as though individually incorporated by reference, to the extent each reference is at least partially not inconsistent with the disclosure in this application (for example, a reference that is partially inconsistent is incorporated by reference except for the partially inconsistent portion of the reference).

[0078] The terms and expressions which have been employed herein are used as terms of description and not of limitation, and there is no intention in the use of such terms and expressions of excluding any equivalents of the features shown and described or portions thereof, but it is recognized that various modifications are possible within the scope of the invention claimed. Thus, it should be understood that although the present invention has been specifically disclosed by preferred embodiments, exemplary embodiments and optional features, modification and variation of the concepts herein disclosed may be resorted to by those skilled in the art, and that such modifications and variations are considered to be within the scope of this invention as defined by the appended claims. The specific embodiments provided herein are examples of useful embodiments of the present invention and it will be apparent to one skilled in the art that the present invention may be carried out using a large number of variations of the devices, device components, methods steps set forth in the present description. As will be obvious to one of skill in the art, methods and devices useful for

the present methods can include a large number of optional composition and processing elements and steps.

[0079] When a group of substituents is disclosed herein, it is understood that all individual members of that group and all subgroups, are disclosed separately. When a Markush group or other grouping is used herein, all individual members of the group and all combinations and subcombinations possible of the group are intended to be individually included in the disclosure.

[0080] Every formulation or combination of components described or exemplified herein can be used to practice the invention, unless otherwise stated.

[0081] Whenever a range is given in the specification, for example, a temperature range, a size or distance range, a time range, or a composition or concentration range, all intermediate ranges and subranges, as well as all individual values included in the ranges given are intended to be included in the disclosure. It will be understood that any subranges or individual values in a range or subrange that are included in the description herein can be excluded from the claims herein.

[0082] All patents and publications mentioned in the specification are indicative of the levels of skill of those skilled in the art to which the invention pertains. References cited herein are incorporated by reference herein in their entirety to indicate the state of the art as of their publication or filing date and it is intended that this information can be employed herein, if needed, to exclude specific embodiments that are in the prior art. For example, when composition of matter are claimed, it should be understood that compounds known and available in the art prior to Applicant's invention, including compounds for which an enabling disclosure is provided in the references cited herein, are not intended to be included in the composition of matter claims herein.

[0083] As used herein, "comprising" is synonymous with "including," "containing," or "characterized by," and is inclusive or open-ended and does not exclude additional, unrecited elements or method steps. As used herein, "consisting of" excludes any element, step, or ingredient not specified in the claim element. As used herein, "consisting essentially of" does not exclude materials or steps that do not materially affect the basic and novel characteristics of the claim. In each instance herein any of the terms "comprising", "consisting essentially of" and "consisting of" may be replaced with either of the other two terms. The invention illustratively described herein suitably

may be practiced in the absence of any element or elements, limitation or limitations which is not specifically disclosed herein.

[0084] All art-known functional equivalents, of any such materials and methods are intended to be included in this invention. The terms and expressions which have been
5 employed are used as terms of description and not of limitation, and there is no intention that in the use of such terms and expressions of excluding any equivalents of the features shown and described or portions thereof, but it is recognized that various modifications are possible within the scope of the invention claimed. Thus, it should be understood that although the present invention has been specifically disclosed by
10 preferred embodiments and optional features, modification and variation of the concepts herein disclosed may be resorted to by those skilled in the art, and that such modifications and variations are considered to be within the scope of this invention as defined by the appended claims.

CLAIMS

We claim:

1. A method of printing a transferable semiconductor element, said method comprising:
 - a. providing an elastomeric stamp having a transfer surface with said semiconductor element supported thereon, wherein said transfer surface comprises a three-dimensional pattern of relief features that at least partially contacts said semiconductor element;
 - b. providing a substrate having a receiving surface;
 - c. establishing conformal contact between said elastomeric stamp and said receiving surface, thereby contacting at least a portion of said semiconductor element with said receiving surface;
 - d. offsetting said elastomeric stamp a horizontal distance relative to said receiving surface, thereby generating a mechanical deformation in at least a portion of said pattern of relief features without separating said semiconductor element from said transfer surface or said receiving surface; and
 - e. separating said stamp from said receiving surface, thereby printing said semiconductor element to said receiving surface.
2. The method of claim 1, wherein said conformal contact step is established by applying air pressure to a top surface of said elastomeric stamp.
3. The method of claim 1, wherein said offsetting step comprises applying an in plane displacement to said elastomeric stamp.
4. The method of claim 3, wherein said in plane displacement comprises a horizontal displacement of said top surface relative to said receiving surface that is greater than 5 μm and less than 100 μm .
5. The method of claim 2, wherein said separating step comprises decreasing said air pressure applied to said stamp top surface.
6. The method of claim 1, wherein said elastomeric stamp further comprises:
 - a. an elastomeric layer having a top surface that is opposite said transfer surface; and
 - b. a rigid backing layer having a bottom surface, wherein said bottom surface is positioned adjacent to said elastomeric layer top surface.

7. The method of claim 6, wherein said elastomeric stamp further comprises a reinforcement layer operably connected to said rigid backing layer, said reinforcement layer having an opening that vertically coincides with at least a portion of said relief features on said transfer surface.
8. The method of claim 1, further comprising mounting said elastomeric stamp to a dry transfer printing tool, wherein said offsetting step comprises applying an in plane displacement to said dry transfer printing tool, thereby generating a mechanical deformation of at least a portion of said relief features.
9. The method of claim 8, further comprising applying a pressure to a top surface of said mounted stamp, thereby establishing conformal contact between said stamp and said receiving surface.
10. The method of claim 8, wherein said stamp is separated from said receiving surface by moving said transfer printing tool mounted to said elastomeric stamp in a vertical direction relative to said receiving surface.
11. The method of claim 10, wherein said pressure varies during said vertical direction movement that separates said stamp from said receiving surface.
12. The method of claim 11, wherein said pressure decreases from a maximum value to a minimum value, wherein said maximum value is between 4 kPa and 10 kPa and said minimum value is between 0 kPa and 2 kPa.
13. The method of claim 12, wherein said pressure decrease rate and said vertical direction movement rate are selected to provide a delamination rate of said relief features from said receiving surface that is substantially constant.
14. The method of claim 1, wherein said relief features comprise a plurality of posts.
15. The method of claim 14 wherein said plurality of posts has a contacting area fraction on said transfer surface selected from a range that is greater than 1% and less than 25%.
16. The method of claim 15, wherein said relief features further comprise:
 - a. a plurality of stabilization features interspersed between said posts, wherein said stabilization features have a contacting area that is less than the contacting area of said posts.
17. The method of claim 1, wherein said semiconductor printing provides a transfer printing yield and said yield is:
 - a. greater than or equal to 99.5% for a receiving surface that is coated with a thin layer of adhesive; or

- b. greater than or equal to 99.5% for stamp delamination rates that are greater than or equal to 1 mm/s.
18. The method of claim 1 further comprising:
- a. optically aligning said stamp with said receiving surface;
 - b. positioning said semiconductor elements to within less than or equal to 100 μm vertical separation distance from said receiving surface; and
 - c. applying a pressure to a top surface of said stamp, thereby establishing conformal contact between said stamp and said receiving surface.
19. The method of claim 18, wherein said pressure is applied by application of a uniform air pressure to said stamp top surface.
20. The method of claim 1, wherein said pattern of relief features support a plurality of semiconductor elements.
21. The method of claim 1, wherein said receiving surface is a low-tack surface.
22. The method of claim 1, wherein said separating step comprises displacing said stamp relative to said receiving surface by applying a vertical offset to said stamp or to said receiving surface.
23. The method of claim 1, wherein said offsetting step is provided by:
- a. applying an in-plane displacement to said stamp; or
 - b. applying an in-plane displacement to said receiving surface.
24. The method of claim 1 further comprising:
- a. applying an air pressure to at least partially establish said conformal contact; and
 - b. vertically separating said stamp from said receiving surface;
- wherein said air pressure varies over a first time interval and said vertical separation is maintained constant over said first time interval; and said air pressure is maintained constant over a second time interval that does not overlap said first time interval, and said vertical separation increases during said second time interval, thereby maintaining a delamination rate that deviates less than or equal to 5% from an average delamination rate over said first and second time intervals.
25. A device for dry transfer printing of semiconductors to a receiving substrate, said device comprising:
- a reinforced composite stamp comprising:

a deformable layer having an internal surface and an external surface positioned opposite said internal surface, said external surface of said deformable layer having a plurality of relief features;

a rigid support layer connected to said internal surface of said deformable layer, wherein said rigid support layer has a bottom surface and a top surface positioned opposite said bottom surface, wherein said bottom surface is positioned proximate to said internal surface of said deformable layer; and

a reinforcement layer operably connected to said rigid support layer, said reinforcement layer having an opening that vertically coincides with at least a portion of said relief features of said external surface of said deformable layer;

a mounting flange having a top surface;

a vertical section that operably connects said mounting flange to said deformable layer external surface;

a transfer printing tool head comprising a receiving surface that is connected to said mounting flange top surface; and

an actuator operably connected to said mounting flange or said transfer printing tool head for generating a horizontal displacement between said deformable layer internal surface and said receiving surface.

26. The device of claim 25, wherein said actuator comprises: a stepper motor, a micropositioner, a pressure generator, or piezoelectric actuator.
27. The device of claim 25, wherein said plurality of relief features comprises a plurality of posts distributed on said external surface.
28. The device of claim 27, further comprising a plurality of stabilization features distributed on said external surface, wherein the height of said stabilization features is less than the height of said posts.
29. The device of claim 28, wherein said stabilization features comprise a first population and a second population, wherein said each population has a geometric footprint and said first population geometric footprint is larger than said second population geometric footprint.
30. The device of claim 25, further comprising:

- a. a variable pressure regulator operably connected to said rigid support layer of said composite stamp for controllably applying a positive pressure to a top surface of said rigid support layer.
31. The device of claim 30, wherein said pressure to a top surface is substantially uniform over said top surface of said rigid support layer.
32. The device of claim 31, wherein said pressure varies with time.
33. A method of printing a transferable semiconductor element, said method comprising:
 - a. providing a reinforced composite elastomeric stamp, said stamp having
 - i. an elastomeric layer having a top surface and a bottom surface;
 - ii. a transfer surface on said elastomeric layer bottom surface, wherein said semiconductor element is supported by said transfer surface and said transfer surface comprises a three-dimensional pattern of relief features that at least partially contacts said semiconductor element;
 - iii. a rigid backing layer having a bottom surface positioned adjacent to said elastomeric layer top surface;
 - iv. a reinforcement layer operably connected to said rigid backing layer, said reinforcement layer having an opening that vertically coincides with at least a portion of said relief features;
 - b. providing a substrate having a receiving surface;
 - c. positioning said transfer surface to within about 200 μm or less of said receiving surface;
 - d. aligning said stamp to said receiving surface;
 - e. establishing conformal contact between said elastomeric stamp and said receiving surface, thereby contacting at least a portion of said semiconductor element with said receiving surface by applying a uniform air pressure to said rigid backing layer;
 - f. offsetting said elastomeric stamp a horizontal distance relative to said receiving surface, thereby generating an in-plane shear force in said stamp;
 - g. decreasing said air pressure applied to said rigid backing layer; and
 - h. separating said stamp from said receiving surface by moving said stamp in a vertical direction relative to said substrate, thereby printing said semiconductor element to said receiving surface.

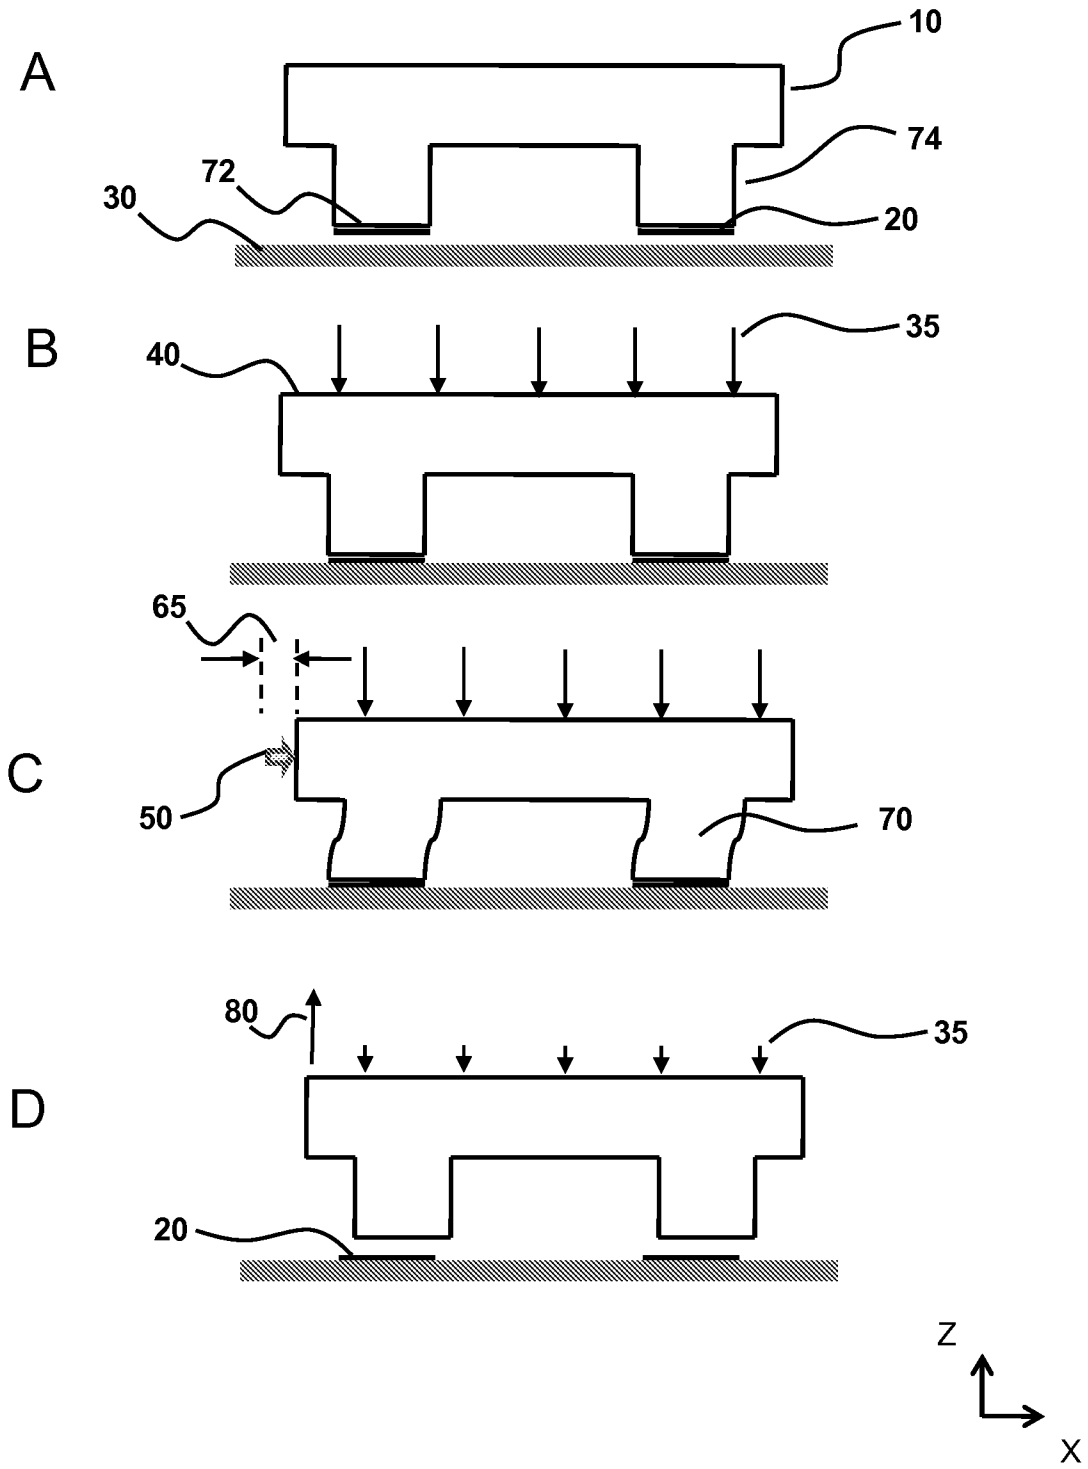


Figure 1

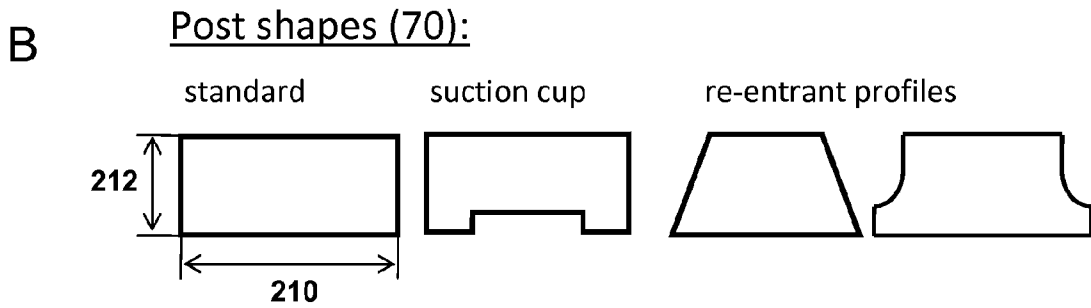
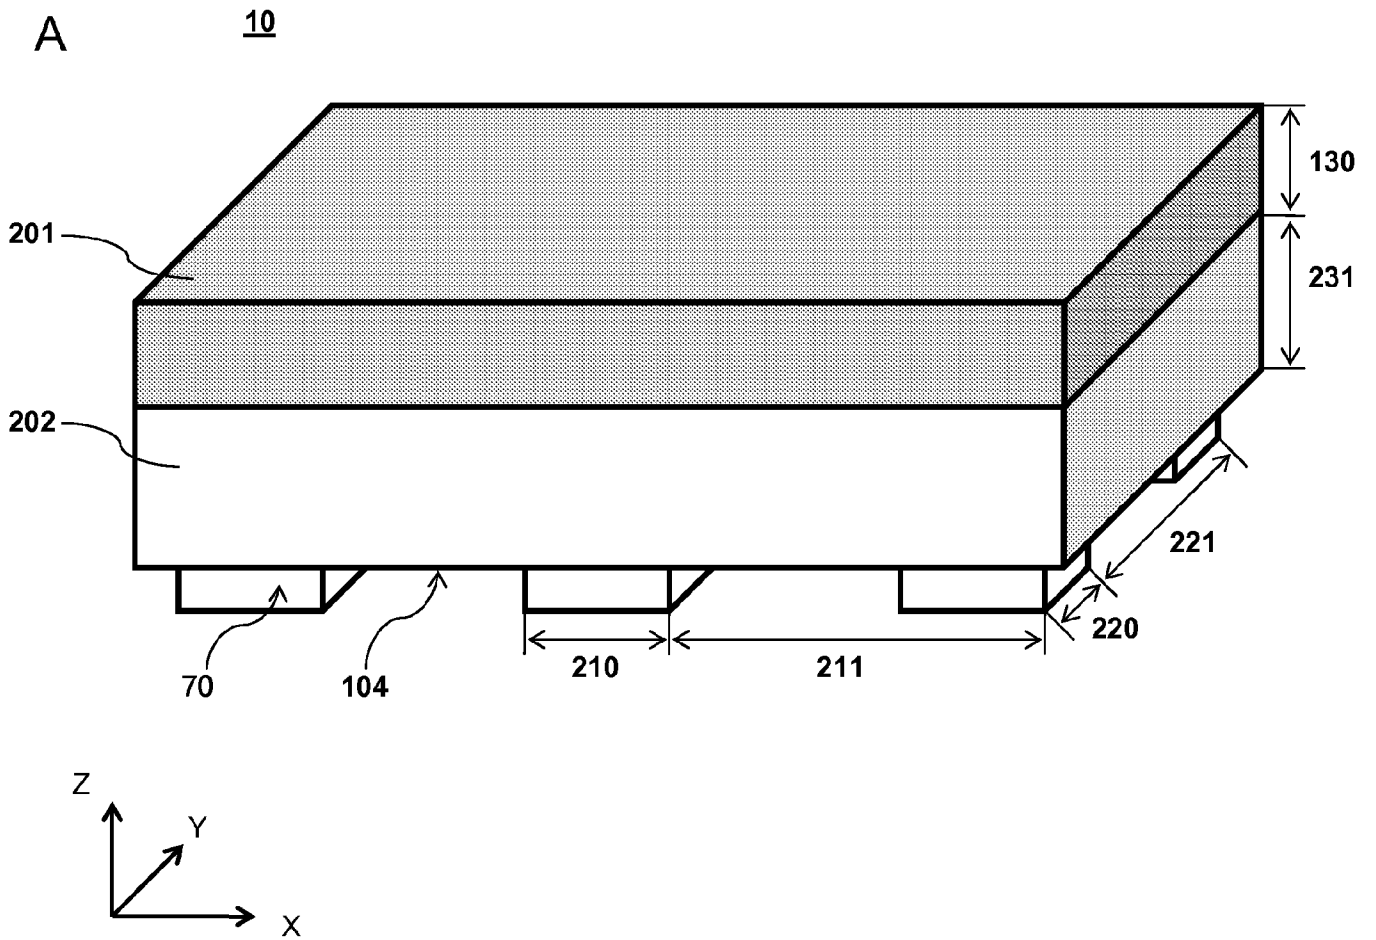


Figure 2

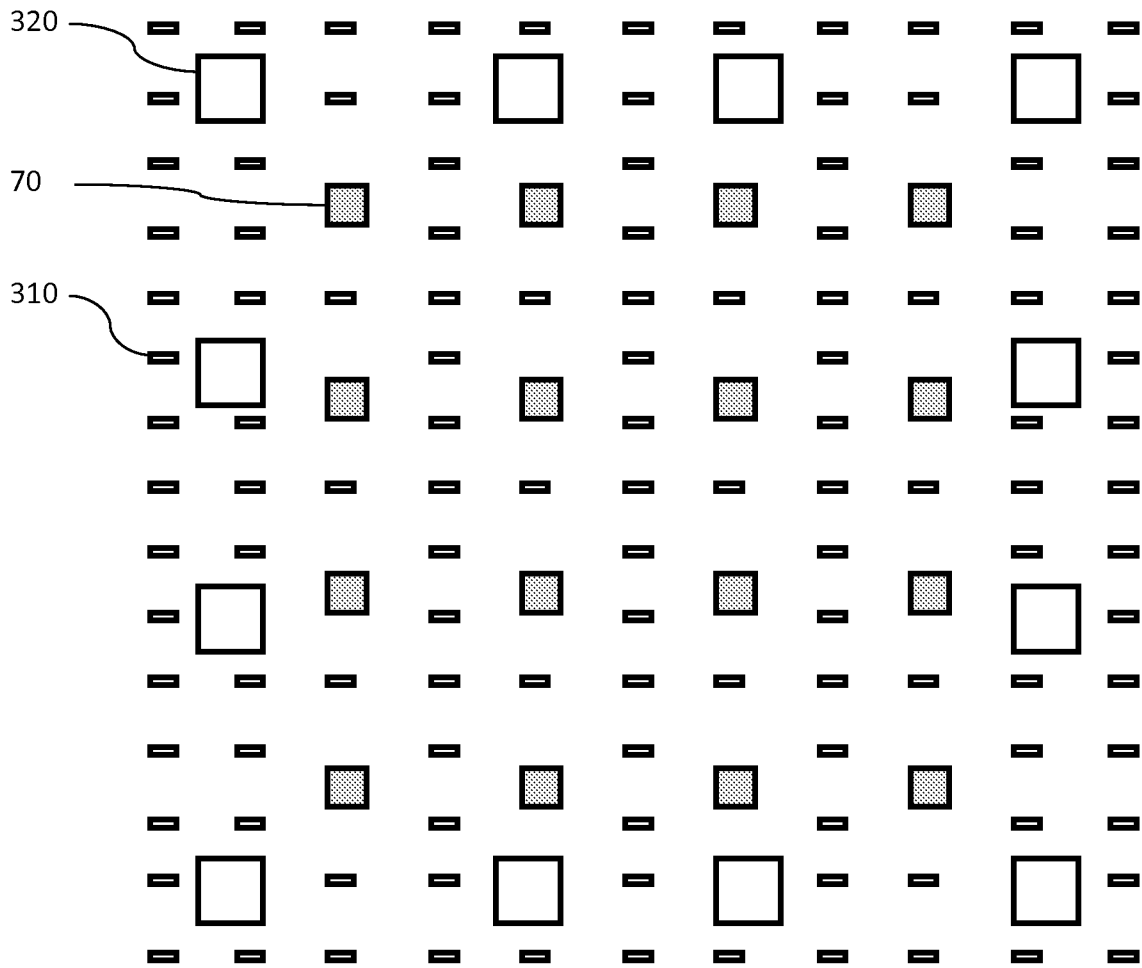


Figure 3

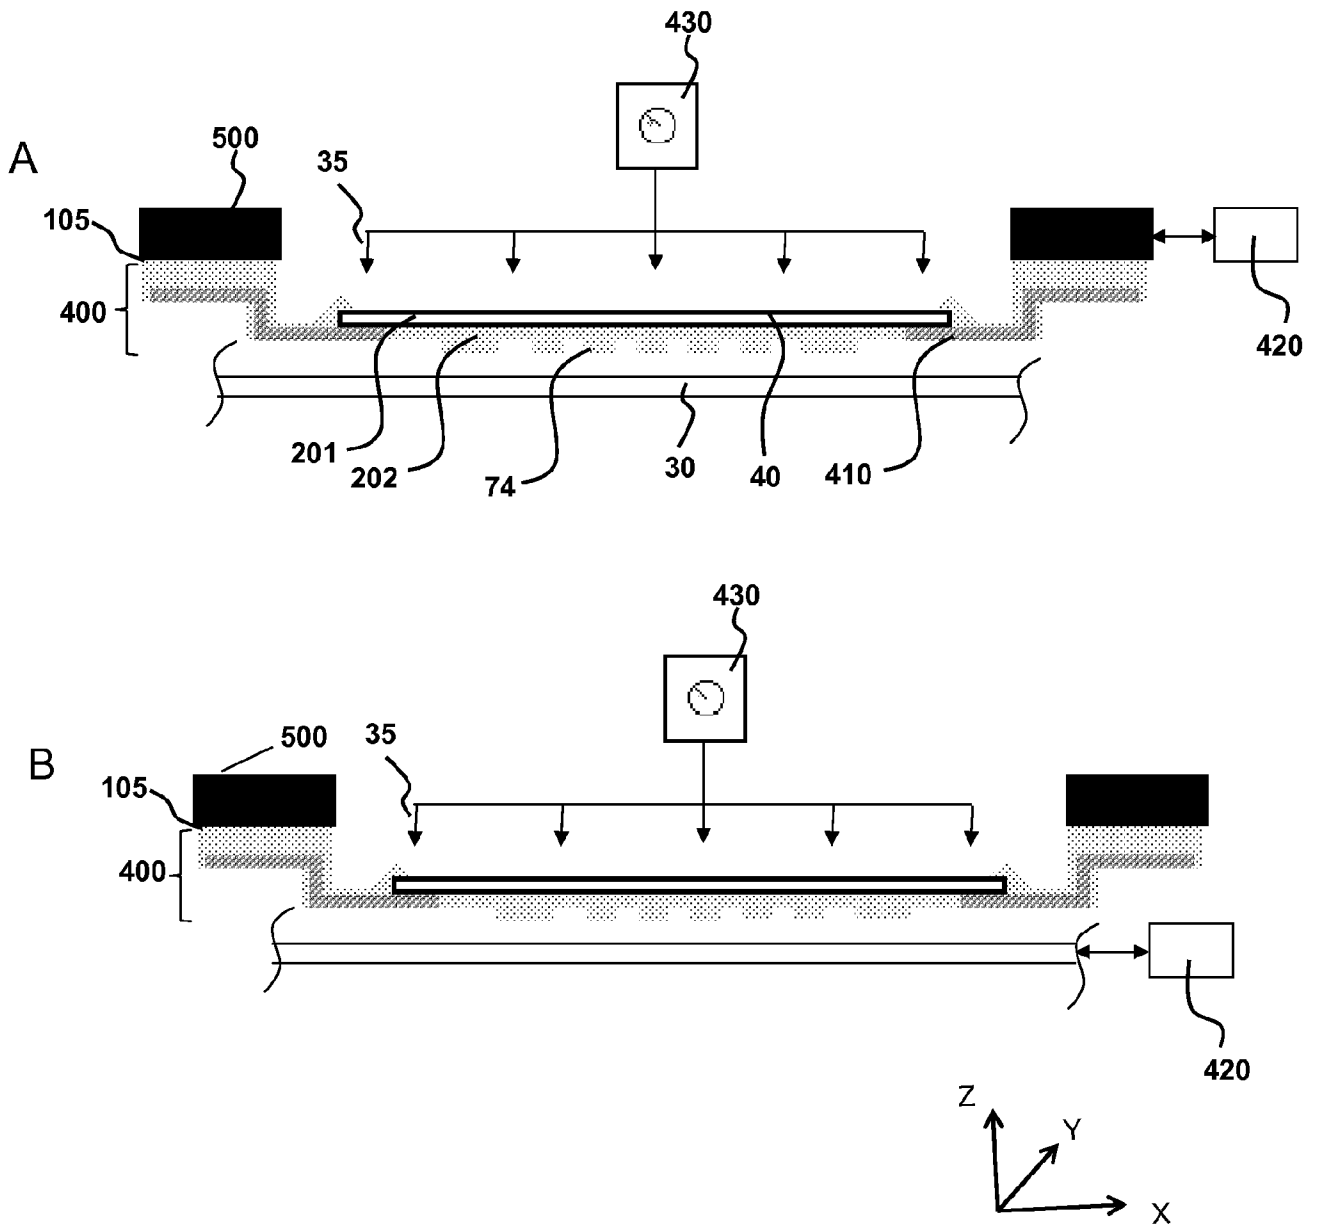


Figure 4

C

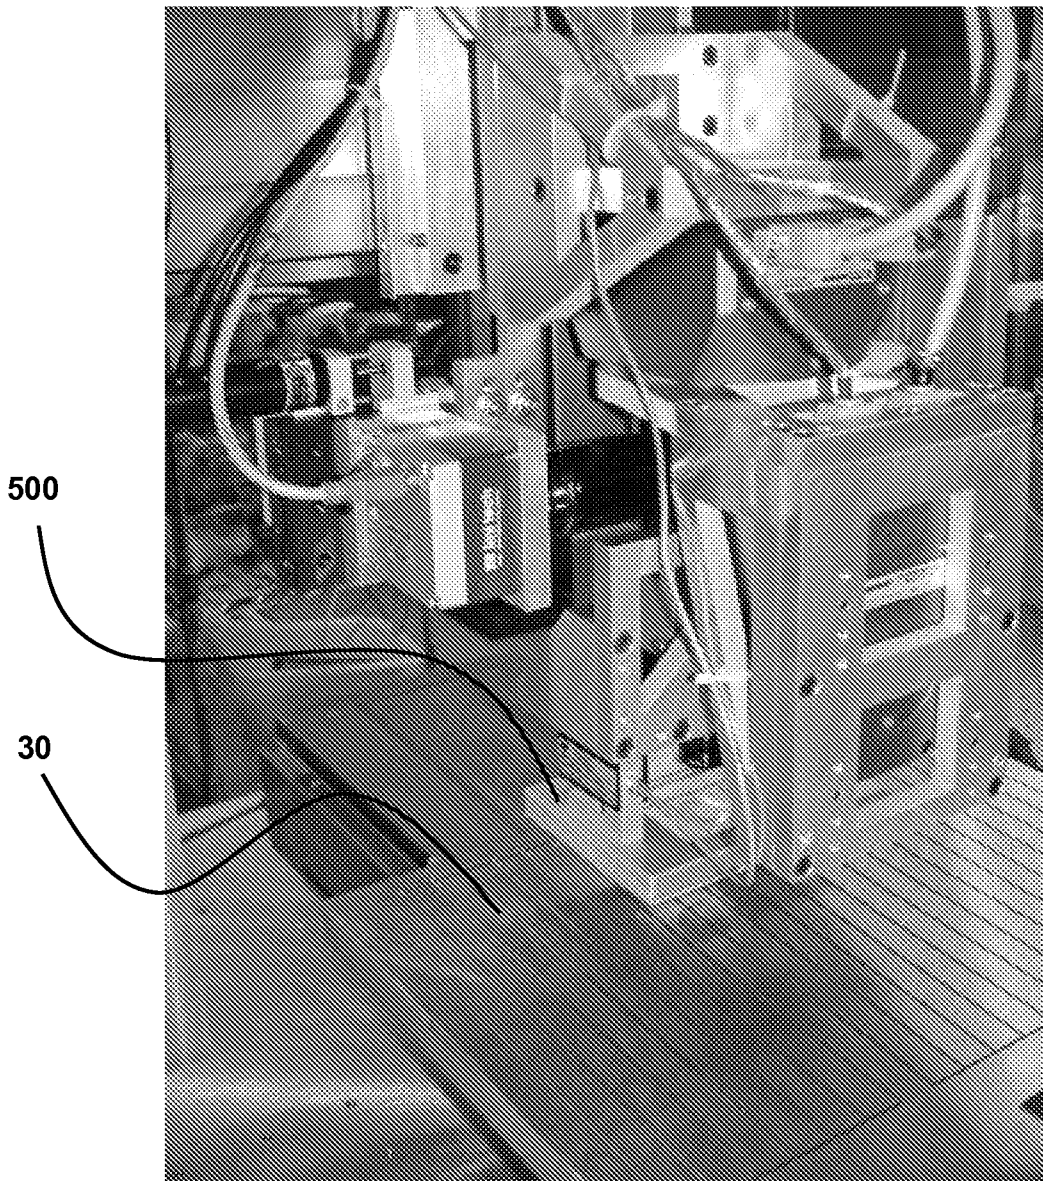


Figure 4 (cont'd)

6 / 11

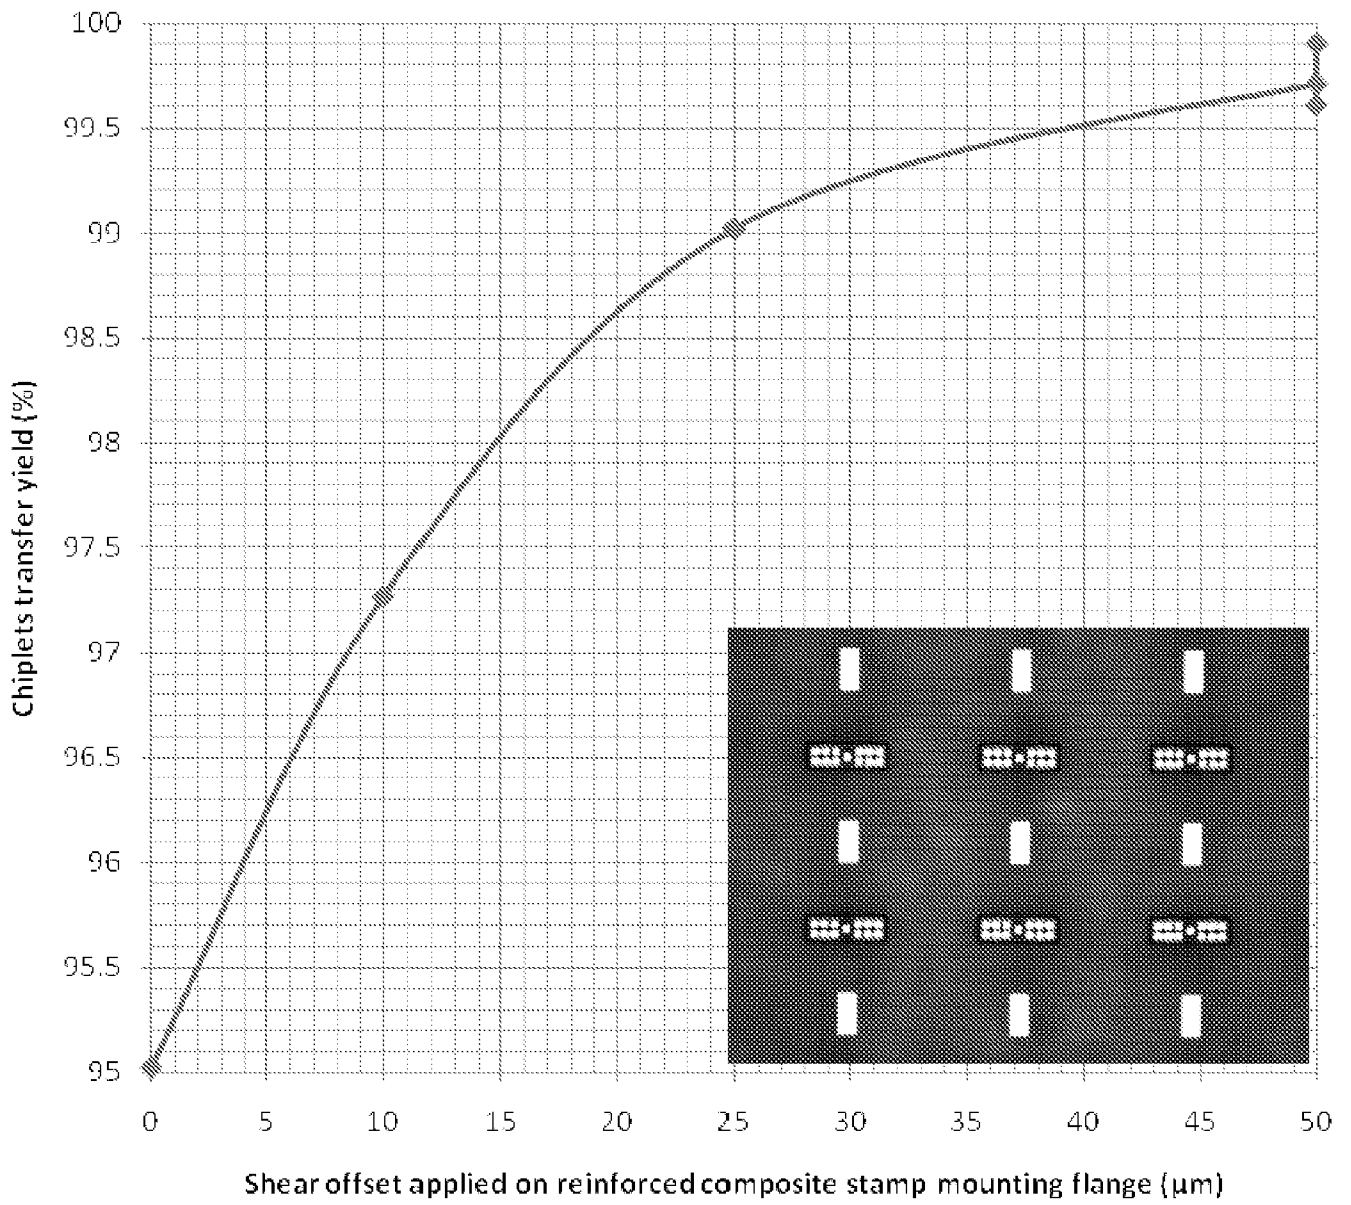


Figure 5

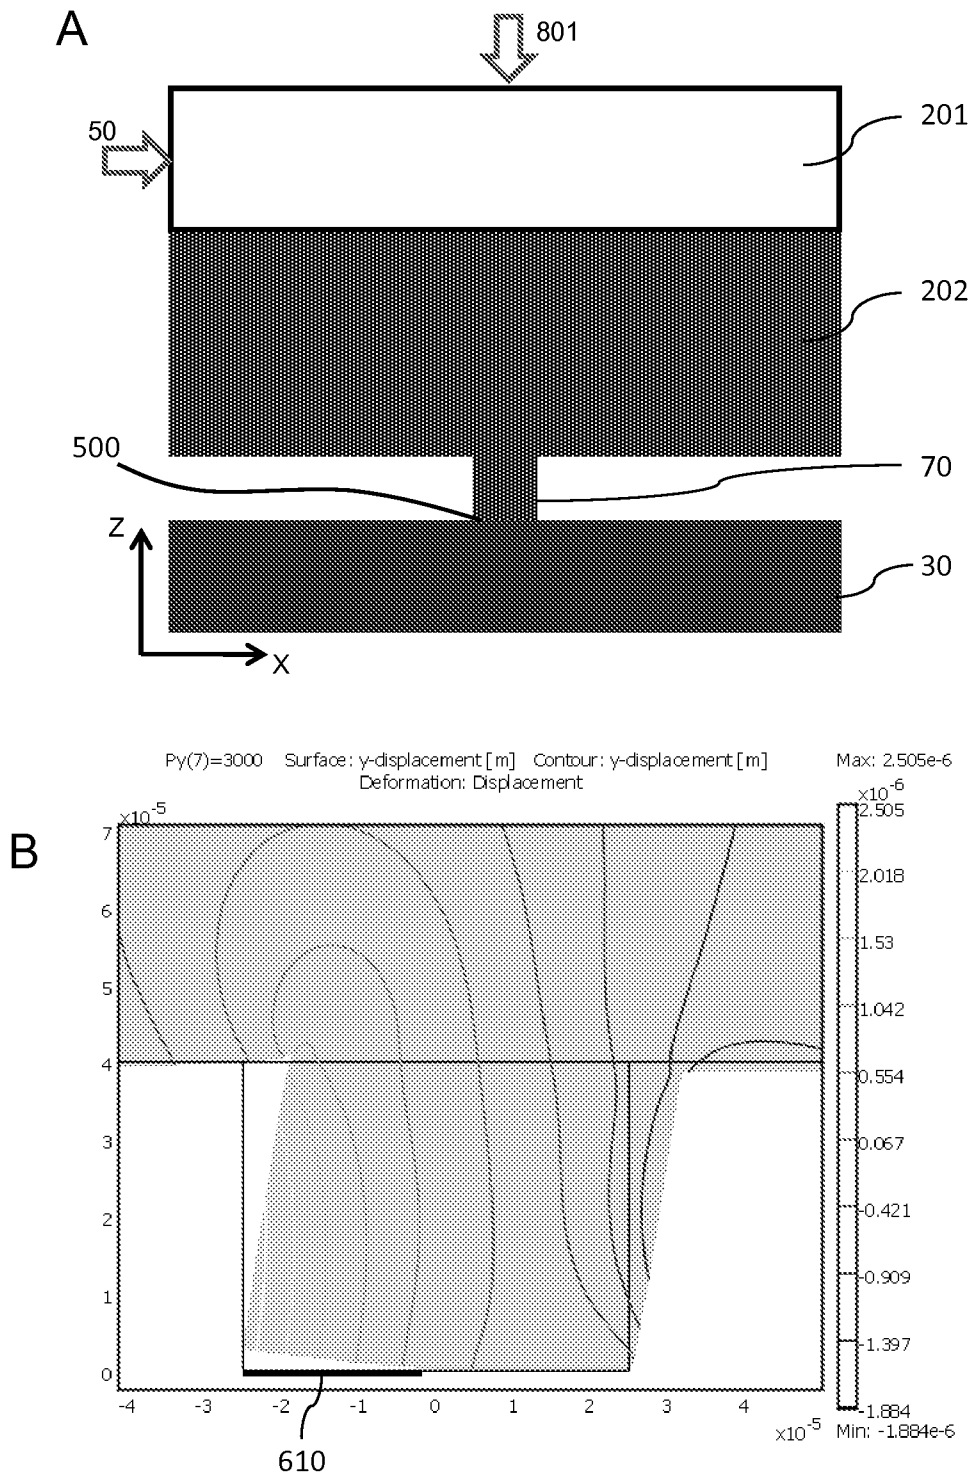


Figure 6


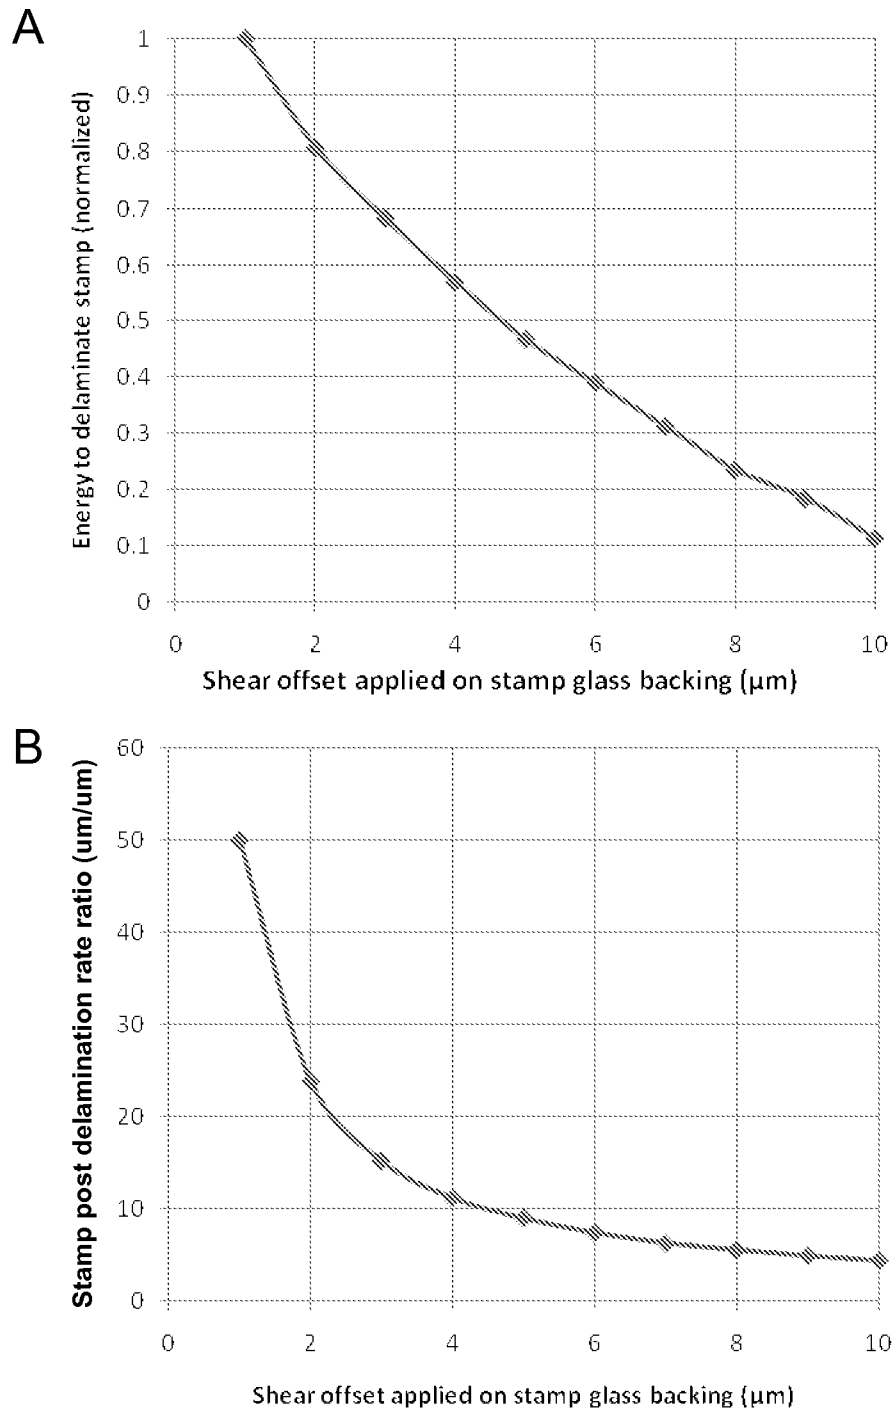


Figure 7

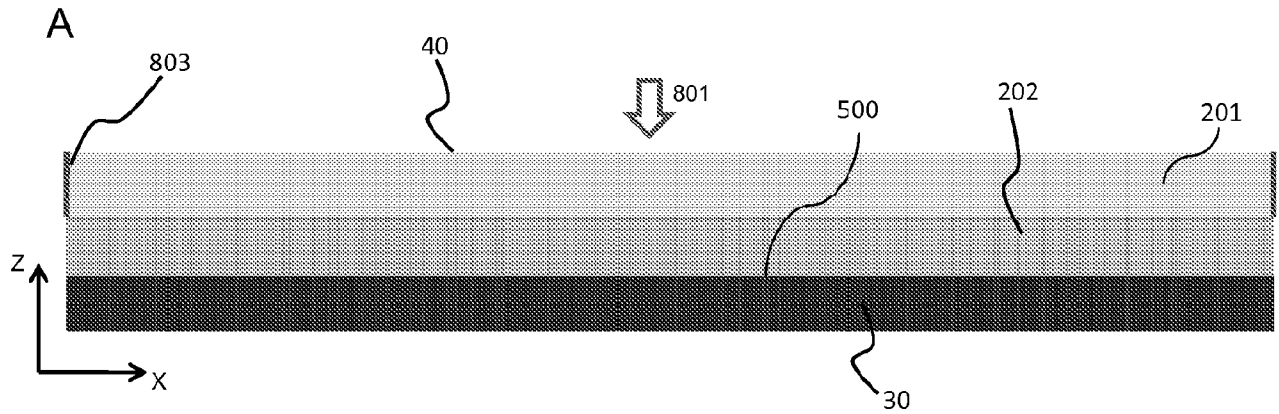

B

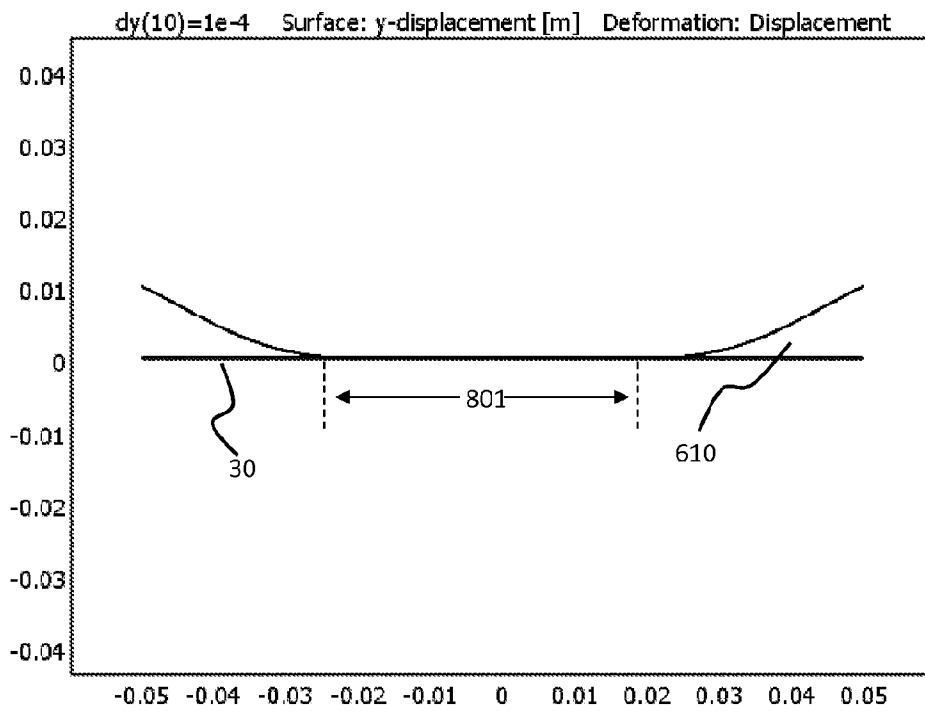


Figure 8

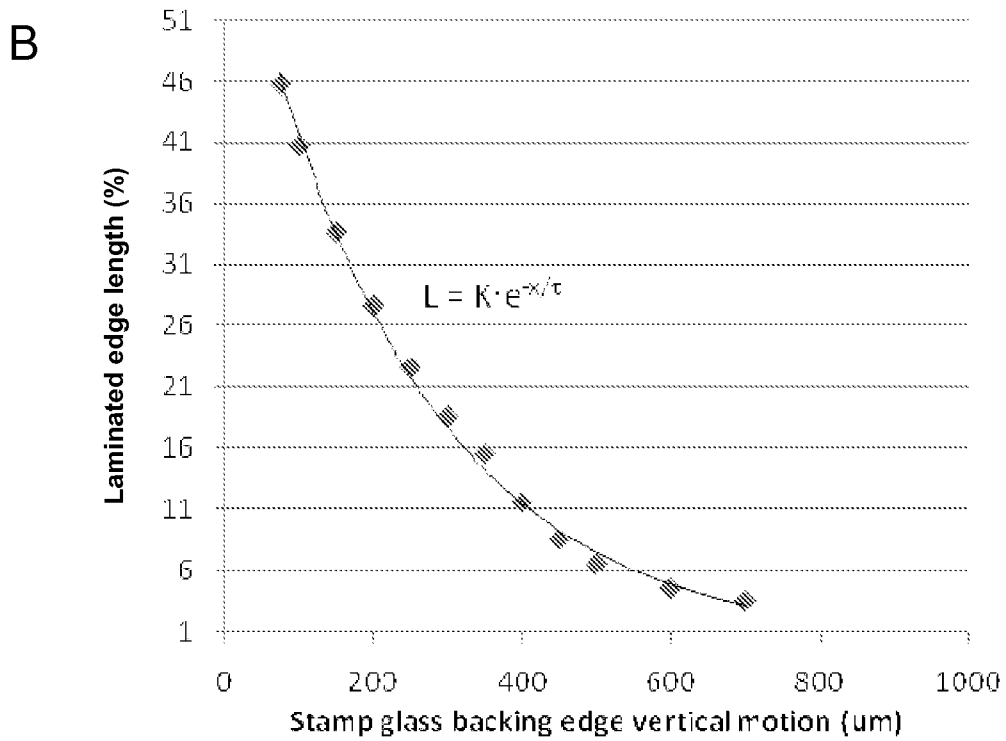
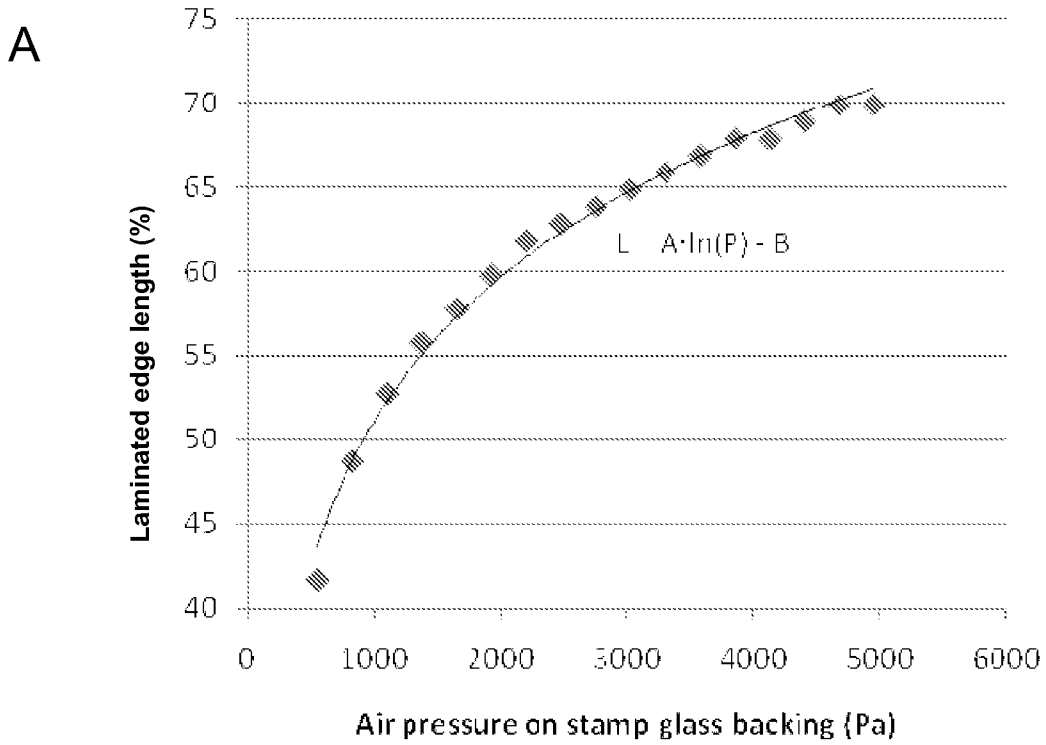


Figure 9

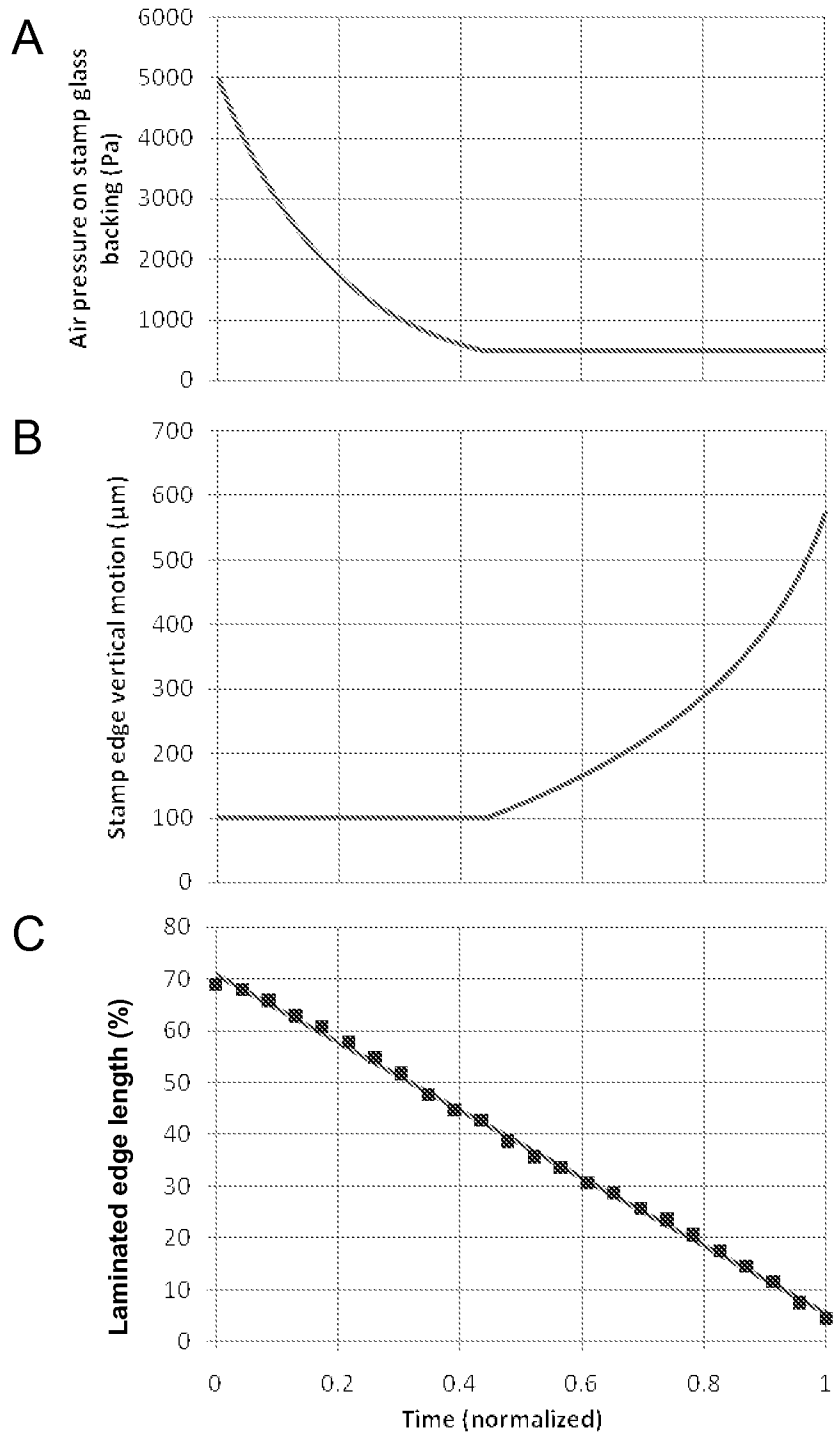


Figure 10

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2009/065078

A. CLASSIFICATION OF SUBJECT MATTER IPC(8) - H01L 21/20 (2010.01) USPC - 216/52 According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) IPC(8) - H01L 21/20 (2010.01) USPC - 216/52 Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) MicroPatent, Google Patents		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2008/0108171 A1 (ROGERS et al) 08 May 2008 (08.05.2008) entire document	1-24
Y	US 2008/0055581 A1 (ROGERS et al) 06 March 2008 (06.03.2008) entire document	1-24
Y	US 7,235,464 B2 (BONA et al) 26 June 2007 (26.06.2007) entire document	4
Y	US 7,363,854 B2 (SEWELL) 29 April 2008 (29.04.2008) entire document	5, 13, 24
Y	US 2003/0047535 A1 (SCHUELLER et al) 13 March 2003 (13.03.2003) entire document	7
Y	US 2006/0196377 A1 (LOOPSTRA et al) 07 September 2006 (07.09.2006) entire document	15-16
Y	US 7,434,512 B2 (BIETSCH et al) 14 October 2008 (14.10.2008) entire document	16
Y	US 2007/0032089 A1 (NUZZO et al) 08 February 2007 (08.02.2007) entire document	17
Y	US 2007/0280578 A1 (GLEBOV et al) 06 December 2007 (06.12.2007) entire document	18-19
Y	WO 2008/055054 A2 (ROGERS et al) 08 May 2008 (08.05.2008) entire document	18-19
Y	WO 2008/047144 A1 (SPEAKMAN) 24 April 2008 (24.04.2008) entire document	21
<input type="checkbox"/> Further documents are listed in the continuation of Box C. <input type="checkbox"/>		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search 17 March 2010		Date of mailing of the international search report <p align="center" style="font-size: 1.2em;">23 APR 2010</p>
Name and mailing address of the ISA/US Mail Stop PCT, Attn: ISA/US, Commissioner for Patents P.O. Box 1450, Alexandria, Virginia 22313-1450 Facsimile No. 571-273-3201		Authorized officer: Blaine R. Copenheaver PCT Helpdesk: 571-272-4300 PCT OSP: 571-272-7774

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US2009/065078

Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

- 1. Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:

- 2. Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:

- 3. Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

- Group I, claims 1-24 are drawn to a method of printing.
- Group II, claims 25-32 are drawn to a device for dry transfer.
- Group III, claim 33 is drawn to a method of printing.

- 1. As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
- 2. As all searchable claims could be searched without effort justifying additional fees, this Authority did not invite payment of additional fees.
- 3. As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:

- 4. No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:
1-24

Remark on Protest

- The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
- The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- No protest accompanied the payment of additional search fees.