



US00RE49779E

(19) **United States**
(12) **Reissued Patent**
Girolami et al.

(10) **Patent Number:** **US RE49,779 E**
(45) **Date of Reissued Patent:** **Jan. 2, 2024**

(54) **FLEXIBLE LIGHTING APPARATUS**

(71) Applicant: **Sourcemaker, Inc.**, Valley Cottage, NY (US)

(72) Inventors: **Peter R. Girolami**, Palisades, NY (US);
Joseph M. DeJoia, Blauvelt, NY (US)

(73) Assignee: **Sourcemaker, Inc.**, Valley Cottage, NY (US)

(21) Appl. No.: **16/414,227**

(22) Filed: **May 16, 2019**

Related U.S. Patent Documents

Reissue of:

(64) Patent No.: **9,651,230**
Issued: **May 16, 2017**
Appl. No.: **14/616,243**
Filed: **Feb. 6, 2015**

U.S. Applications:

(60) Provisional application No. 61/937,406, filed on Feb. 7, 2014.

(51) **Int. Cl.**

F21V 21/14 (2006.01)
F21V 23/06 (2006.01)
G03B 15/02 (2021.01)
F21V 19/00 (2006.01)
F21V 21/005 (2006.01)
F21L 14/02 (2006.01)
F21V 17/00 (2006.01)
F21S 4/10 (2016.01)
F21Y 113/00 (2016.01)
F21Y 115/10 (2016.01)

(52) **U.S. Cl.**

CPC **F21V 21/145** (2013.01); **F21L 14/023** (2013.01); **F21V 17/007** (2013.01); **F21V 19/0025** (2013.01); **F21V 21/005** (2013.01);

F21V 23/06 (2013.01); **G03B 15/02** (2013.01);
F21S 4/10 (2016.01); **F21Y 2113/00** (2013.01);
F21Y 2115/10 (2016.08)

(58) **Field of Classification Search**

CPC **F21V 19/0025**; **F21V 23/06**; **F21V 17/007**;
F21V 21/005; **F21V 21/145**; **F21L 14/023**; **G03B 15/02**; **F21Y 2113/00**;
F21Y 2115/10; **F21S 4/10**

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

3,894,225 A 7/1975 Chao
4,173,035 A 10/1979 Hoyt
4,439,818 A 3/1984 Scheib
4,607,317 A 8/1986 Lin
4,782,336 A 11/1988 Bailey
4,970,812 A 11/1990 Tanaka et al.
5,057,981 A 10/1991 Bowen et al.

(Continued)

FOREIGN PATENT DOCUMENTS

WO 2002061328 8/2002
WO WO-2008127050 A1 * 10/2008 G02F 1/133603
WO 2014145416 9/2014



Primary Examiner — William C Doerrler

(74) *Attorney, Agent, or Firm* — Lowenstein Sandler LLP

(57) **ABSTRACT**

A lighting apparatus comprising a light emitting diode (LED) arrangement encased in a blanket-like body is provided. The blanket-like body is constructed in a manner allowing for the lighting apparatus to be rolled up for ease of storage and transport.

11 Claims, 7 Drawing Sheets

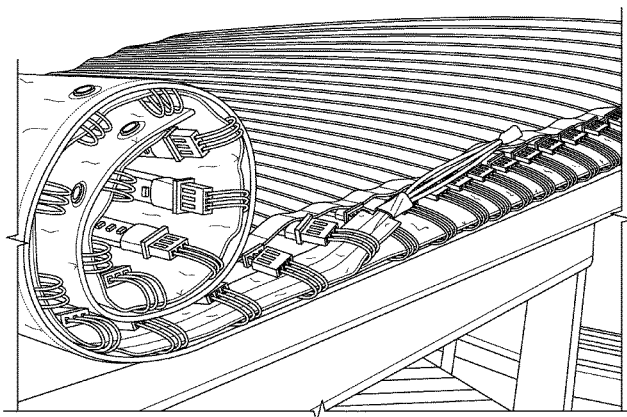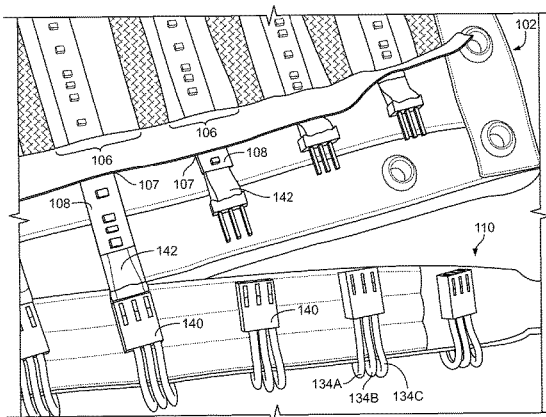

(56)

References Cited

U.S. PATENT DOCUMENTS

5,162,696	A	11/1992	Goodrich		8,851,356	B1	10/2014	Holec et al.	
5,469,020	A	11/1995	Herrick		2002/0187697	A1	12/2002	Kiryushev et al.	
5,532,711	A *	7/1996	Harris	G02B 6/0008	2004/0160768	A1	8/2004	Cok	
				340/815.42	2005/0237741	A1*	10/2005	Chang	A47H 13/00
									362/249.01
5,697,175	A	12/1997	Schwartz		2006/0007059	A1	1/2006	Bell	
5,834,901	A *	11/1998	Shen	F21V 23/06	2006/0007666	A1	1/2006	Cook	
				315/185 S	2006/0082987	A1*	4/2006	Dorsey	F21S 48/215
									362/103
5,964,518	A	10/1999	Shen		2006/0215398	A1	9/2006	Farmer et al.	
6,158,882	A	12/2000	Bischoff, Jr.		2007/0182666	A1*	8/2007	Hochman	G09F 19/22
6,193,385	B1	2/2001	Maki et al.						345/46
6,311,350	B1	11/2001	Kaiserman et al.		2007/0217200	A1	9/2007	Yang et al.	
6,331,915	B1	12/2001	Myers		2008/0089060	A1	4/2008	Kondo et al.	
6,352,355	B1	3/2002	Law		2008/0298058	A1*	12/2008	Kan	F21V 15/01
6,371,637	B1*	4/2002	Atchinson	F21V 19/005					362/240
				362/249.04	2009/0059610	A1	3/2009	Marshall et al.	
6,394,623	B1	5/2002	Tsui		2009/0146910	A1	6/2009	Gardner	
6,513,955	B1	2/2003	Waltz		2009/0231834	A1	9/2009	Krohn	
6,677,918	B2	1/2004	Yuhara et al.		2009/0296382	A1*	12/2009	Maier	F21V 15/01
6,787,990	B2	9/2004	Cok						362/218
6,808,295	B2	10/2004	Waltz et al.		2010/0008090	A1	1/2010	Li et al.	
6,871,981	B2	3/2005	Alexanderson et al.		2010/0103649	A1	4/2010	Hamada	
D509,954	S	9/2005	Waltz		2011/0096531	A1*	4/2011	Frey	G02F 1/133305
7,075,226	B2	7/2006	Cok						362/97.4
7,246,925	B2	7/2007	Waltz et al.		2011/0163681	A1	7/2011	Dau et al.	
7,319,408	B2	1/2008	Temple		2011/0227487	A1	9/2011	Nichol et al.	
7,354,180	B2	4/2008	Sawhney et al.		2012/0327264	A1*	12/2012	Spielberg	G03B 15/03
7,374,315	B2	5/2008	Dorsey et al.						348/224.1
7,604,377	B2	10/2009	Yu et al.		2013/0313988	A1*	11/2013	McRae	H05B 37/02
D613,886	S	4/2010	Lodhie						315/193
D614,318	S	4/2010	Lodhie		2014/0254152	A1	9/2014	Bohler	
8,172,426	B2	5/2012	Frey		2014/0268777	A1	9/2014	Saydkhuzhin et al.	
D675,347	S	1/2013	Wollard		2014/0362575	A1*	12/2014	Shirilla	F21V 21/145
8,384,295	B2	2/2013	Simi						362/249.08
8,410,726	B2	4/2013	Dau et al.		2016/0076708	A1*	3/2016	Shirilla	F21S 2/005
8,599,104	B2	12/2013	Gardner						362/235
8,690,385	B2*	4/2014	Ubaghs	G09F 21/02					
				362/235					

* cited by examiner

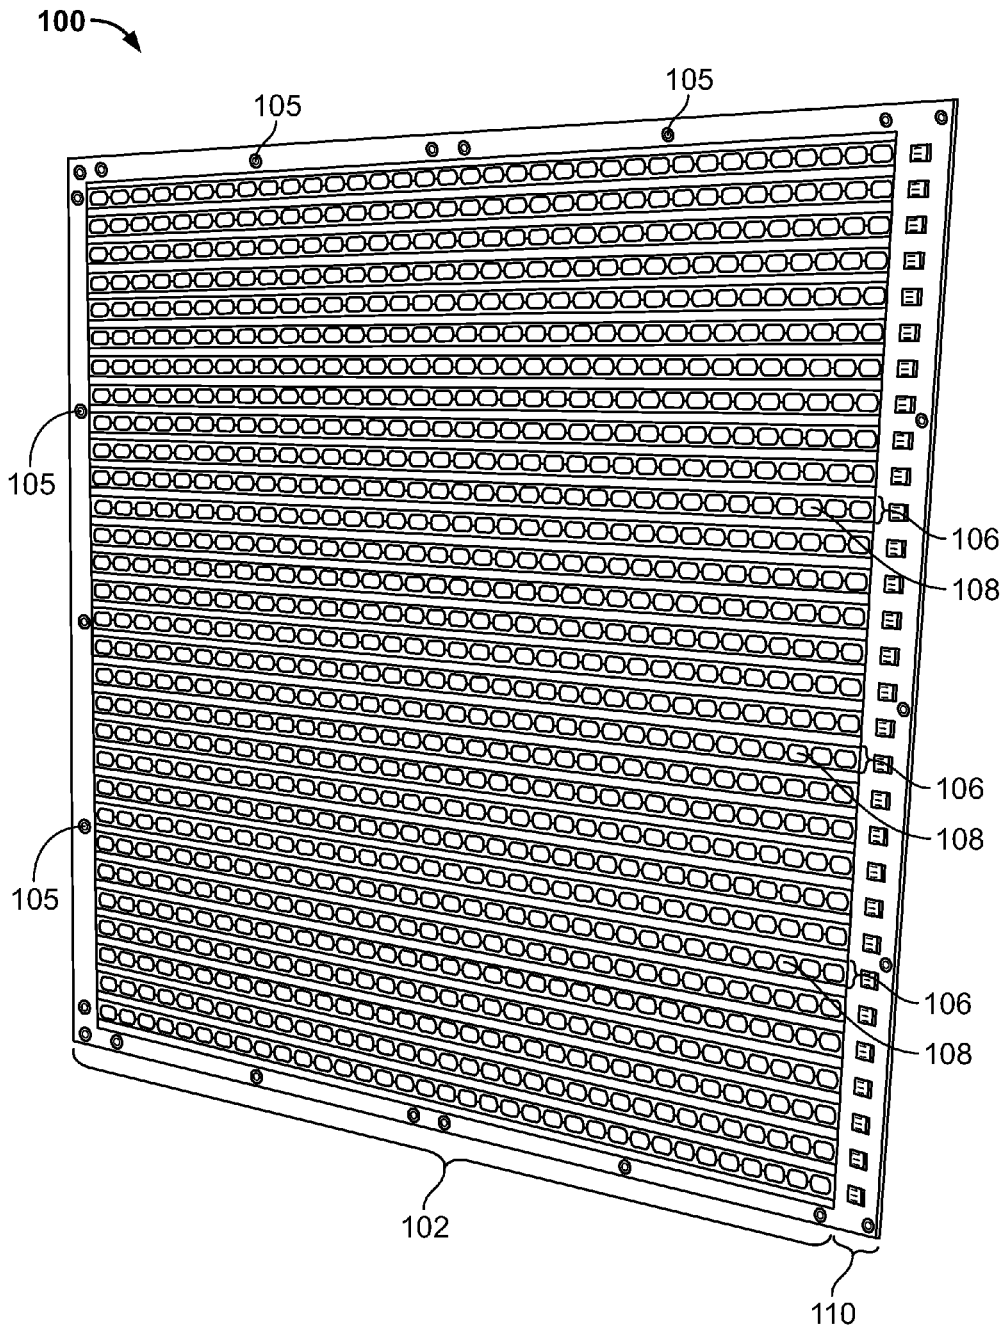


FIG. 1

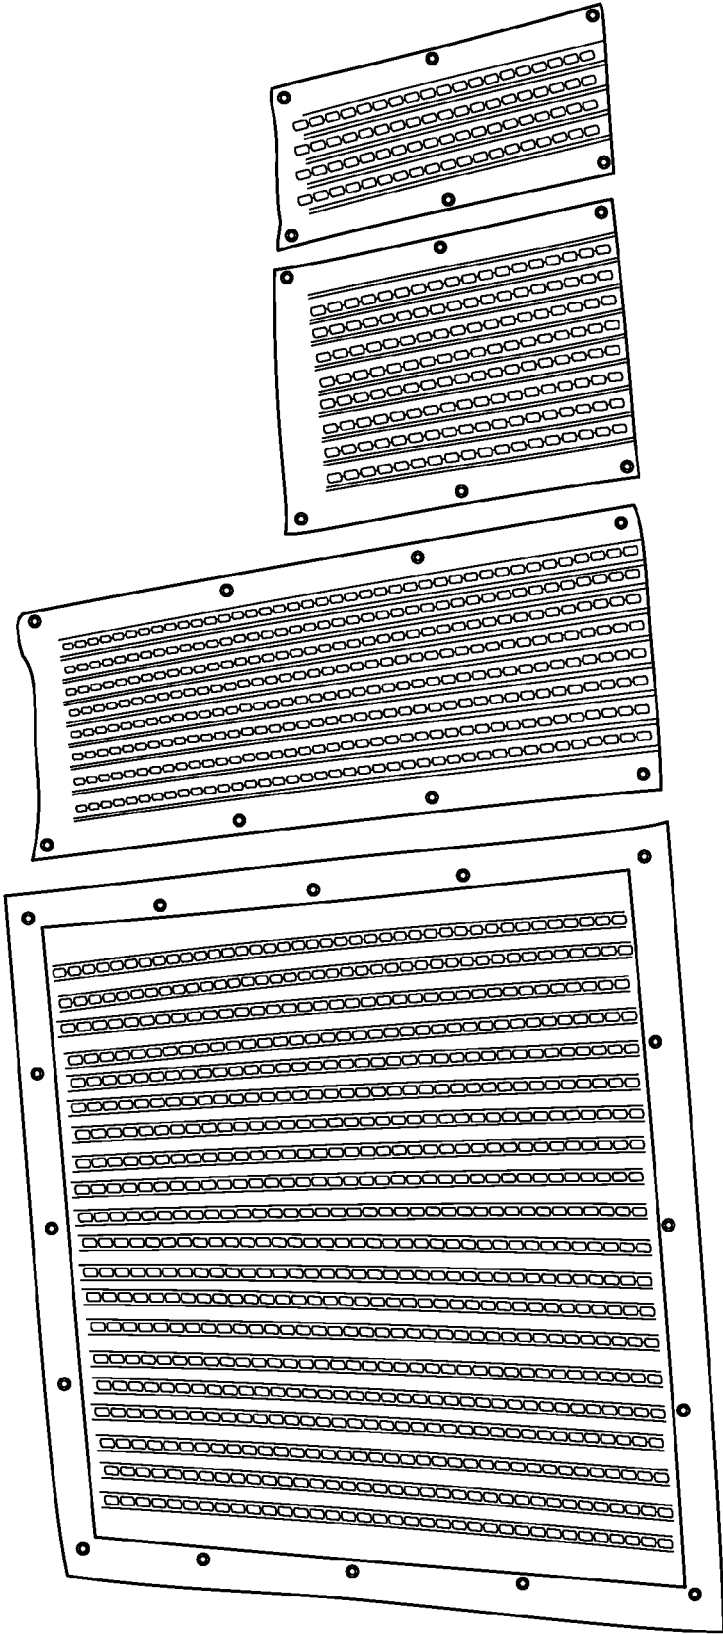


FIG. 2

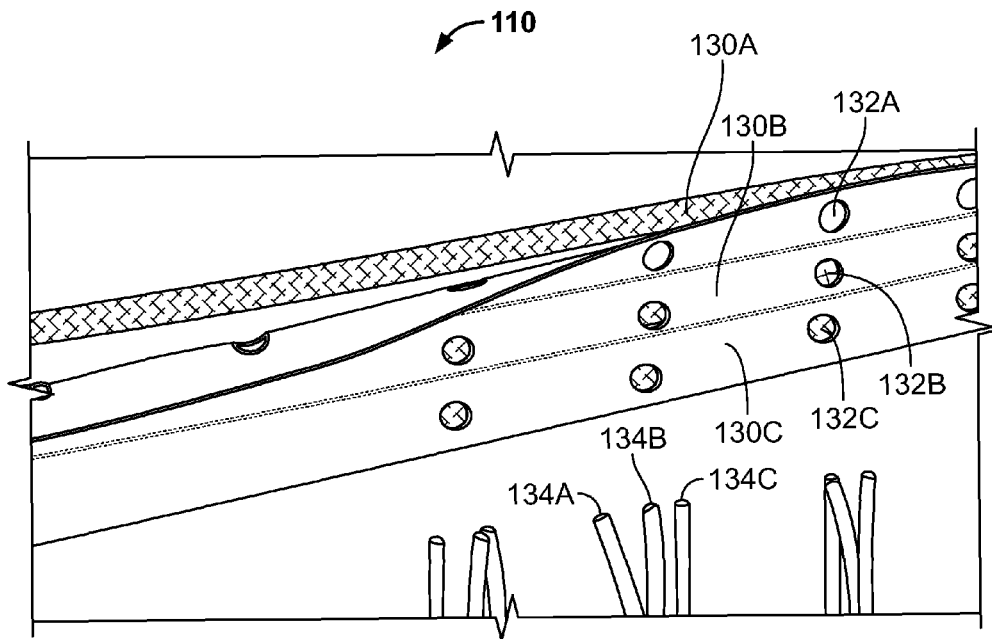


FIG. 3A

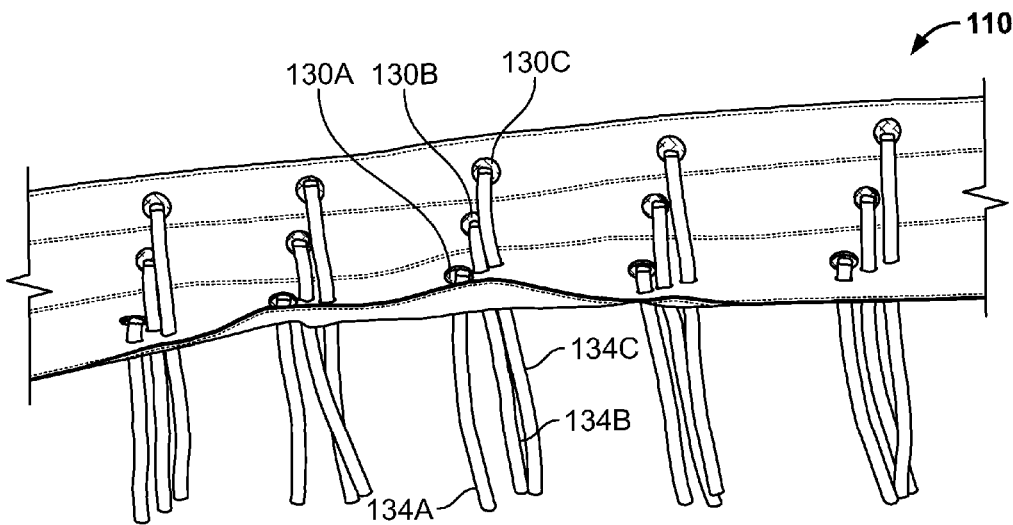


FIG. 3B

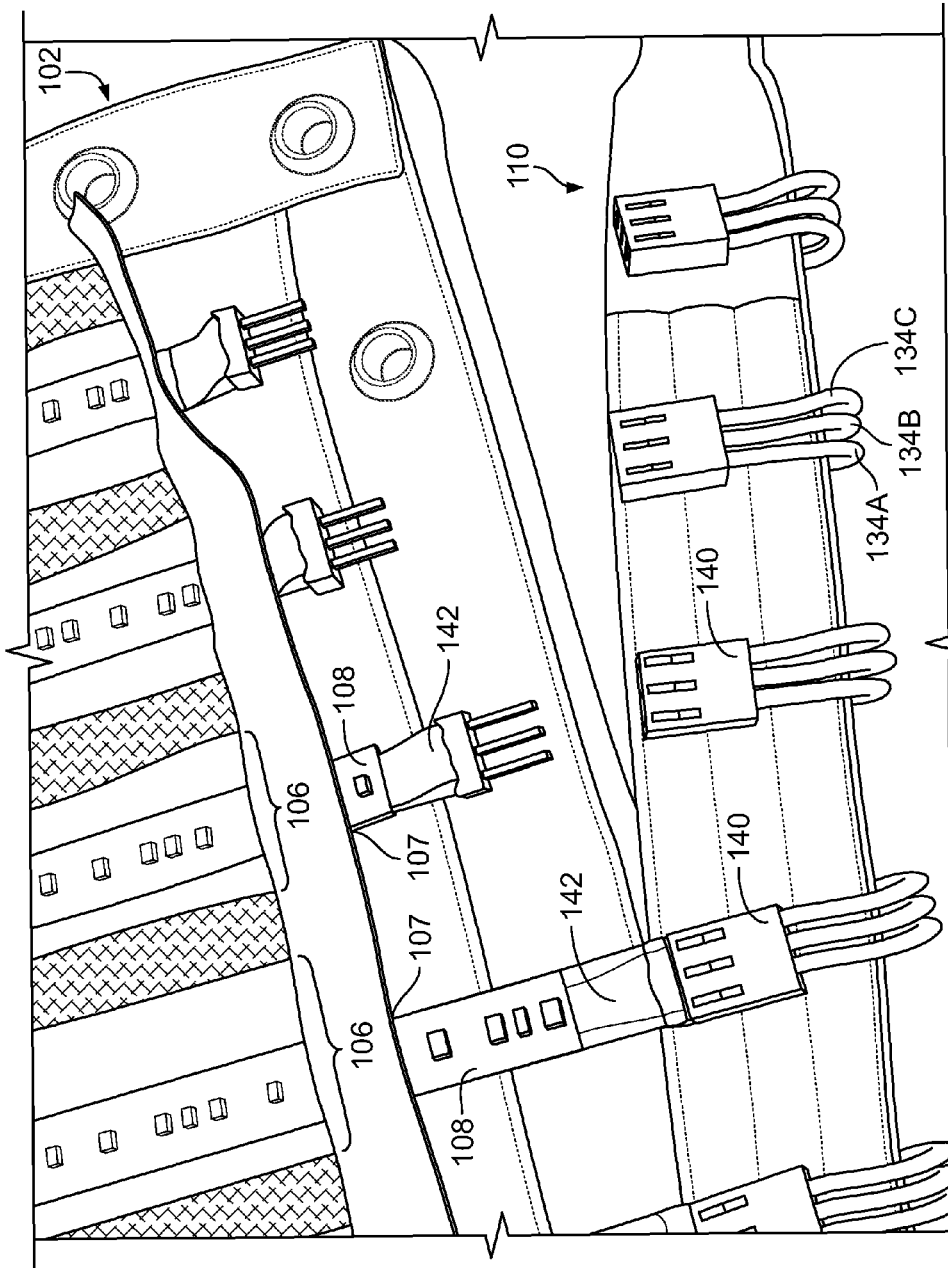


FIG. 4A

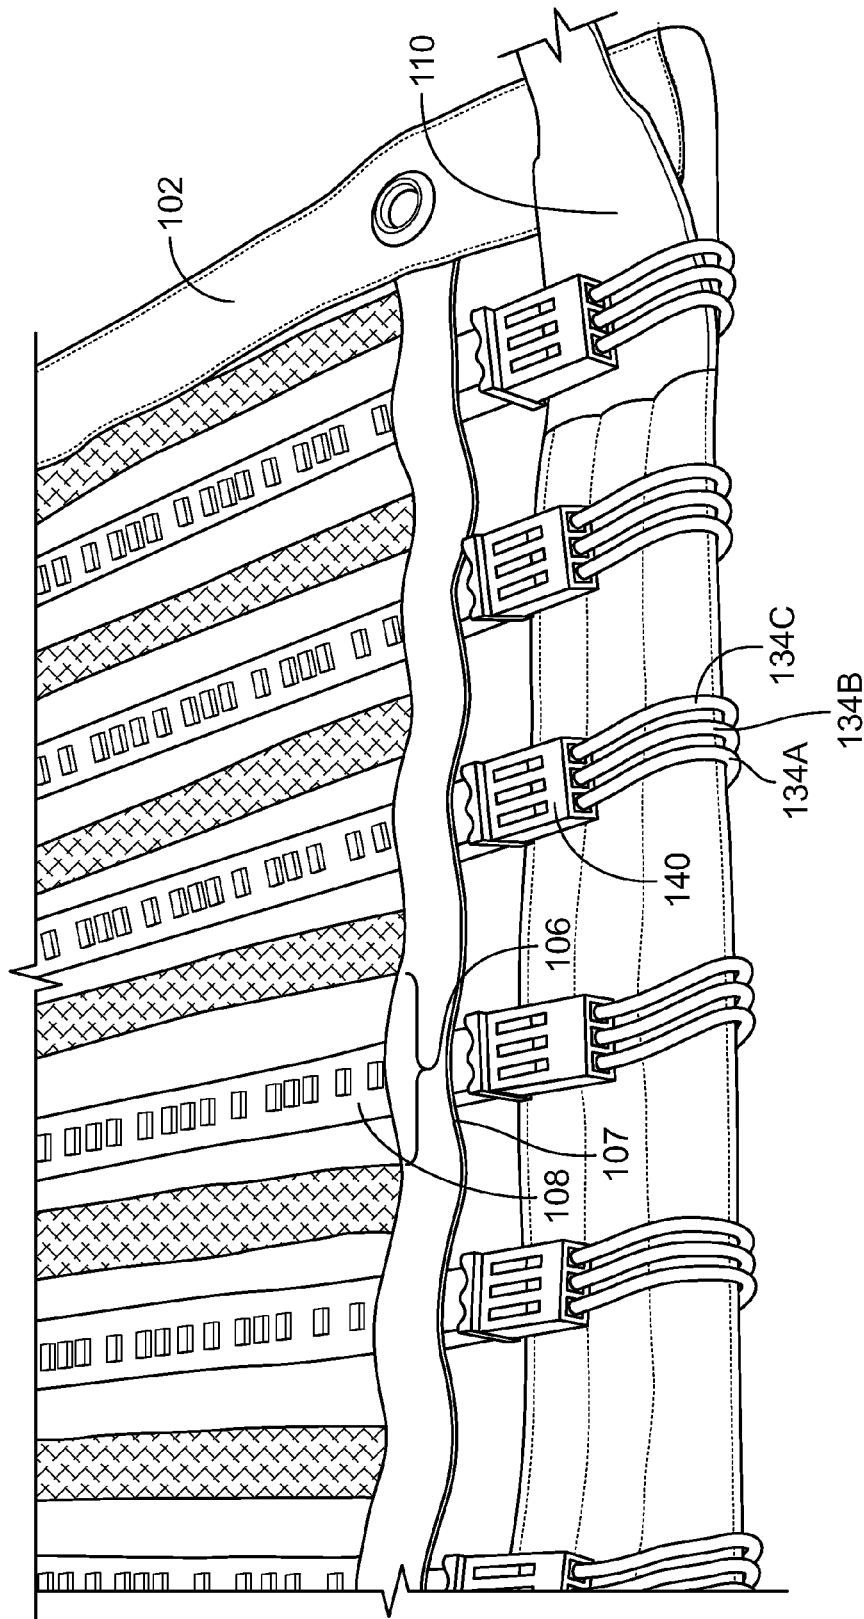


FIG. 4B

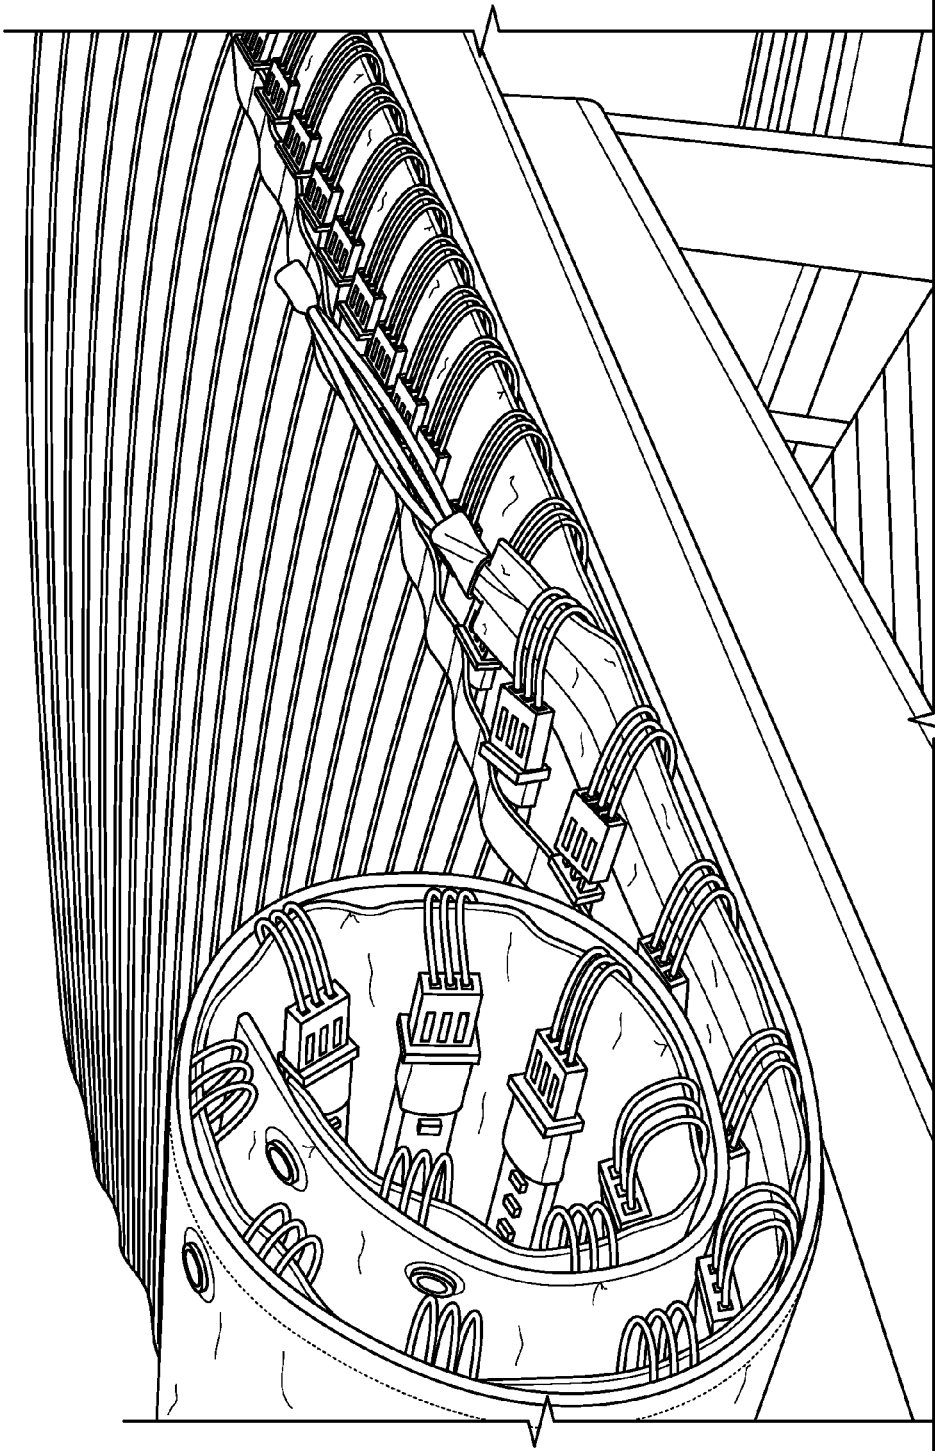


FIG. 5A



FIG. 5B

FLEXIBLE LIGHTING APPARATUS

Matter enclosed in heavy brackets [] appears in the original patent but forms no part of this reissue specification; matter printed in italics indicates the additions made by reissue; a claim printed with strikethrough indicates that the claim was canceled, disclaimed, or held invalid by a prior post-patent action or proceeding.

CROSS-REFERENCE TO RELATED APPLICATIONS

This application claims priority to U.S. Provisional Patent Application No. 61/937,406, filed Feb. 7, 2014, the entire disclosure of which is incorporated by reference herein in its entirety.

TECHNICAL FIELD

Embodiments of the invention relate generally to a lighting apparatus and, more particularly, to a light emitting diode (LED) arrangement encased in a blanket-like body.

BACKGROUND

Proper lighting is essential in the filming and photography industry. However, many of the traditional lighting solutions offered in the industry are limited by their ability to accommodate multiple applications. This is often the case, for example, when there are frequent changes in lighting requirements or placement position. Moreover, many of the traditional lighting solutions are often impractical, lacking ease of quick setup and transportability.

Accordingly, there is a need for improved lighting solutions with particular applicability in the filming and photography industry.

BRIEF DESCRIPTION OF THE DRAWINGS

The present invention is illustrated by way of example, and not by way of limitation, and will become apparent upon consideration of the following detailed description, taken in conjunction with the accompanying drawings, in which like reference characters refer to like parts throughout, and in which:

FIG. 1 illustrates a lighting apparatus in accordance with an embodiment of the present invention.

FIG. 2 illustrates varying dimensions of the lighting apparatus.

FIGS. 3A and 3B illustrate a wiring harness of the lighting apparatus.

FIGS. 4A and 4B illustrate a wiring harness coupled to the blanket body and LED arrangement of the lighting apparatus.

FIGS. 5A and 5B illustrate, respectively, a partially rolled up and a fully rolled up blanket body of the lighting apparatus.

DETAILED DESCRIPTION

FIG. 1 illustrates an embodiment of a lighting apparatus 100 comprising a blanket-like body 102 that is adapted to be suspended from a structure (e.g., a frame). Body 102 is constructed of a flexible, yet durable, material and may be comprised of a plurality of apertures 105 along its periphery to permit a variety of suspension positions. Various dimen-

sions of body 102 may be provided, as illustrated in FIG. 2, to service different lighting applications.

Body 102 is further comprised of a plurality of pockets 106 adapted to receive a plurality of LED arrangements 108 therein. An LED arrangement 108 may be, for example, a flexible LED ribbon or a rigid LED strip having a plurality of LED lighting elements affixed thereon. A rigid LED strip, for example, may be a color corrected lighting strip made for film, television or broadcast purposes, wherein the LED lighting elements affixed thereon may have, for example, an alternating tungsten/daylight color to allow for complete control of color temperature. It is envisioned that a plurality of lighting mixtures and color variations may be used including, but certainly not limited to, tungsten, daylight, RGB, RGBA, RGBW, hybrids or any other suitable combinations thereof.

Pockets 106 may be constructed from a rigid, clear plastic formed in the shape of a tubular conduit having an opening 107 at its end, as illustrated in FIGS. 4A and 4B. An LED arrangement 108 may be slidably affixed and encased within a pocket 106 via opening 107. By allowing for LED arrangements 108 to be individually encased in each of pockets 106, any one LED arrangement 108 may be easily removed, replaced or interchanged.

Lighting apparatus 100 further comprises a wiring harness 110 that may be electrically coupled to the plurality of LED arrangements 108 provided in pockets 106 of body 102. Wiring harness 110 may form part of body 102 or be provided as a separate component part appended to body 102. Wiring harness 110 may be constructed of a durable material, similar to that used in the construction of body 102, and may also comprise a plurality of apertures along its outer periphery to aid in suspension of lighting apparatus 100. A power supply (not shown) is electrically coupled to wiring harness 110 at another end to power the plurality of LED arrangements 108.

Referring to FIGS. 3A and 3B, wiring harness 110 may be comprised of three (3) braided wires 130A-C (braided wire 130A exposed). Wire openings 132A-C may be provided along the length of wiring harness 110 to allow electrical access points to each of braided wires 130A-C. Lead wires 134A-C may be coupled at one terminating end to braided wires 130A-C via wire openings 132A-C. As illustrated in FIGS. 4A and 4B, a three-prong connector 140 may be provided at the opposing terminating end of lead wires 134A-C. Each three-prong connector 140 is adapted to plug-in to three-prong leads 142 provided at the end of each LED arrangement 108 encased in pockets 106 of body 102. It should be noted that the three braided wires 130A-C and three-prong connectors 140 described herein are provided by way of example, and not by way of limitation, and more or less electrically conductive wires (e.g., in solid core, stranded or braided form) and varying multi-pin connectors may be used to accommodate a particular LED arrangement envisioned for use in body 102.

As illustrated in FIG. 4B, adequate spacing is provided between each of pockets 106, thereby permitting body 102 to be folded or rolled up for ease of storage and transport. Having the same spacing corresponding to the spacing between each of pockets 106, as well as the use of braided wires 130A-C in the manner previously described, permits wiring harness 110 to be rolled up along with body 102. A partially and fully rolled up version of body 102 is illustrated, respectively, in FIGS. 5A and 5B.

Whereas many alterations and modifications of the present invention will no doubt become apparent to a person of ordinary skill in the art after having read the foregoing

description, it is to be understood that any particular embodiment described and shown by way of illustration is in no way intended to be limiting. Therefore, references to details of various embodiments do not limit the scope of the claims, which in themselves recite only those features regarded as the invention.

What is claimed is:

- 1. A lighting apparatus, comprising:
 - a blanket-like body having a plurality of pockets;
 - a detachable wiring harness having at least three separate wiring channels and a plurality of [three-prong] connectors *each having at least three prongs*, said wiring harness attached to said blanket-like body, each of said wiring channels embodying an electrically conductive wire coupled to a power source, each of said wiring channels constructed with a plurality of openings providing electrical access points along the length of said wiring harness, and each [three-prong] *prong of a* connector coupled to [said] *a separate* electrically conductive wire embodied in each of said [three] separate wiring channels via said plurality of openings; and
 - a light emitting diode (LED) arrangement embodied within each of said plurality of pockets, each said LED arrangement electrically coupled to said power source independent of another said LED arrangement via said plurality of [three-prong] connectors, *wherein said LED arrangement is a color corrected lighting strip*

comprising a plurality of LED-driven lighting elements having at least two alternating color temperatures.

- 2. The apparatus of claim 1, wherein said blanket-like body is constructed of a durable material.
- 3. The apparatus of claim 1, wherein said blanket-like body is flexible.
- 4. The apparatus of claim 1, wherein said blanket-like body is comprised of a plurality of apertures along its periphery.
- 5. The apparatus of claim 1, wherein each of said plurality of pockets are constructed of a clear plastic formed in the shape of a tubular opening.
- 6. The apparatus of claim 1, wherein said LED arrangement is a flexible LED ribbon.
- 7. The apparatus of claim 1, wherein said LED arrangement is a rigid LED strip.
- 8. The apparatus of claim 1, wherein said LED arrangement is slidably received and individually encased within each of said plurality of pockets.
- 9. The apparatus of claim 1, wherein said blanket-like body is constructed to permit said blanket body to be folded or rolled up.
- 10. The apparatus of claim 1, further comprising a suspension frame for suspending said blanket-like body.
- 11. *The apparatus of claim 1, wherein said at least two alternating color temperatures are a tungsten color temperature and a daylight color temperature.*

* * * * *