

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
22 March 2001 (22.03.2001)

PCT

(10) International Publication Number  
**WO 01/20929 A1**


- (51) International Patent Classification<sup>7</sup>: **H04Q 7/22** (74) Agent: **ROBINSON, Ian, Michael**; Appleyard Lees, 15 Clare Road, Halifax HX1 2HY (GB).
- (21) International Application Number: PCT/GB00/02445 (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (22) International Filing Date: 26 June 2000 (26.06.2000)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 9921768.9 16 September 1999 (16.09.1999) GB (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- (71) Applicant (*for all designated States except US*): **TMX (TIGERMAX) LIMITED** [GB/GB]; Warford Hall, Merrymans Lane, Great Warford, Alderley Edge, Cheshire SK9 7TP (GB).
- (72) Inventor; and (75) Inventor/Applicant (*for US only*): **BROWN, Amanda** [GB/GB]; Warford Hall, Merrymans Lane, Great Warford, Alderley Edge, Cheshire SK9 7TP (GB).

**Published:**

— *With international search report.*

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: METHOD AND APPARATUS FOR TRANSMITTING SHORT MESSAGES BETWEEN FIXED LINE AND CELLULAR TELEPHONE NETWORKS

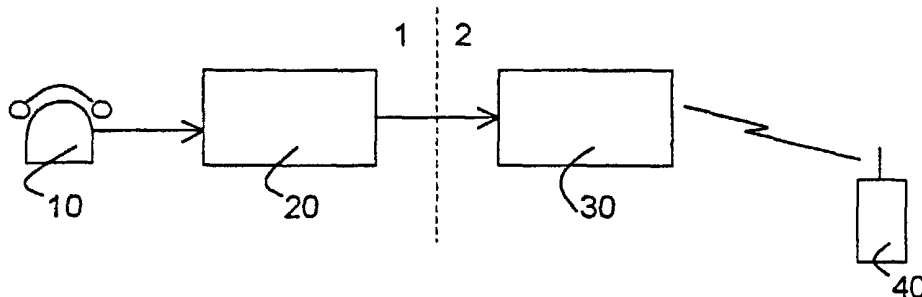

(57) Abstract: A method and apparatus for transmitting SMS-type short messages from a user (10) of a PSTN network (1) to a second user (40) of a cellular network, and vice versa, via a first server (20) of the PSTN (1) and a second server (30) acting as a short message service centre of the cellular network (2), by supplementing short messages with an additional field (104-Figure 4) uniquely identifying the first server (20), either at the first server (20) or at the second user apparatus (40).

WO 01/20929 A1

**Method and Apparatus for Transmitting Short Messages  
between Fixed Line and Cellular Telephone Networks**

5       The present invention relates in general to the transmission of messages between a fixed line telephone network such as a public switched telephone network (PSTN), and a cellular telephone network. The invention also relates to the transmission of messages between user  
10 apparatus coupled to a fixed line telephone network such as a PSTN.

      A short message service (SMS) is well known in the field of cellular telephony, allowing users to send and  
15 receive short text messages (typically up to around 160 characters). Each short message comprises a packet of data including a recipient identifier (giving the telephone number of the intended recipient), a free text portion (conveniently prepared off-line prior to  
20 transmission), and an originator identifier (giving the telephone number of the originator).

      Referring to Figure 1, a known short message service for use with a cellular telephony network will be briefly  
25 described. The system comprises many user apparatus of which two are shown 40 and 41, and a short message service centre (SMSC) 30. In use, a text message is prepared off-line on a first user apparatus 40 and then sent to the SMSC 30 as a short message data packet. The SMSC 30  
30 forwards the short message to the second user apparatus 41 as the intended recipient. If the second user apparatus 41 is turned off or is in a poor reception area, the SMSC 30 waits until a connection is established before

delivering the short message to the second user apparatus 41. Importantly, both the first and second user apparatus 40 and 41 must be part of the cellular telephony network in order for the SMSC 30 to correctly interpret the originator identifier and recipient identifier within the data package of the short message. A problem arises in that it is not possible to transmit such a short message from a first user apparatus coupled to the cellular telephone network to a second user apparatus coupled to any other telephony network such as a fixed line telephone network or PSTN. Further, at present it is not possible to send and receive short messages between first and second user apparatus that are both coupled to a fixed line telephone network such as a PSTN.

15

An aim of at least some embodiments of the present invention is to provide a method and apparatus enabling the transmission of short messages between user apparatus coupled to separate telephone networks, and in particular between a fixed line network such as a PSTN and a cellular telephony network.

An aim of other embodiments of the present invention is to provide a method and apparatus enabling the transmission of short messages between fixed line user apparatus coupled to a fixed line telephony network such as a PSTN.

According to a first aspect of the present invention there is provided a method a method for transmitting a short message, comprising the steps of: (a) preparing a short message at a first user apparatus; (b) sending the prepared short message to a first message server; and (c)

delivering the short message to a second user apparatus;  
characterised in that: the first user apparatus and the  
first server are both members of a first telephony network  
whilst the second user apparatus is a member of a separate  
5 second telephony network; the step (c) includes  
supplementing the short message at the first server with  
information identifying the first server; and the step (c)  
includes forwarding the supplemented short message from  
the first server to a second server being a member of the  
10 second telephony network for delivery to the second user  
apparatus.

Also, according to the first aspect of the present  
invention there is provided a method for transmitting a  
15 short message comprising the steps of: (a) preparing a  
short message at a first user apparatus within a first  
network environment; (b) sending the prepared short  
message from the first apparatus to a first message server  
also in the first network environment; (c) supplementing  
20 the short message with information identifying the first  
message server; (d) forwarding the supplemented short  
message to a second message server in a second network  
environment; and (e) delivering the supplemented short  
message from the second message server to a second user  
25 apparatus in the second network environment.

According to a second aspect of the present invention  
there is provided a method for transmitting a short  
message, comprising the steps of: (a) preparing a short  
30 message at a second user apparatus; (b) sending the  
prepared short message to a second server; and (c)  
delivering the short message to a first user apparatus;  
characterised in that: the second user apparatus and the

second server are both members of a second telephony network; the step (a) includes supplementing the prepared message with information identifying a first server; the step (c) includes forwarding the  
5 supplemented short message to the identified first server in a separate first telephony network for delivery to the first user apparatus of the first telephony network.

Also according to a second aspect of the present  
10 invention there is provided a method for transmitting a short message, comprising the steps of: (f) preparing a short message at a second user apparatus in a second network environment, sending the prepared short message to a second message server also in the second network  
15 environment; (h) extracting from the short message information identifying a first message server in a first network environment; (i) forwarding the short message to the identified first message server; and (j) delivering the short message from the first message server to a first  
20 user apparatus in the first network.

Preferably, the first telephony network is a fixed line network such as a public switched telephone network (PSTN) whilst the second telephony network is a cellular  
25 telephony network such as a GSM network. Preferably, the method of the first aspect and the method of the second aspect are combined, to provide for the transmission of a short message from the first user apparatus to the second user apparatus, and vice versa. Preferably, the short  
30 message sent from the second user apparatus to the first user apparatus is a new message, or is a reply to a message received from the first user apparatus, or vice versa.

Preferably, the information identifying the first server comprises a server ID which is unique to the first server. The server ID is conveniently added as an additional field within the short message, and comprises a numeric data string of up to six characters. Preferably the step (c) of either the first or second aspect of the method includes translating the short message in the first server from a format suitable for transmission in the first telephony network to a format suitable for transmission in the second telephony network, or vice versa.

Preferably, in the second aspect the step (c) includes forwarding the short message to the identified first server in response to the second server detecting the presence of the information identifying the first server, and/or in response to the second server failing to resolve the intended recipient of the short message because the first user apparatus is not a member of the second telephony network. Preferably, the step (c) includes confirming at the first server that the information identifying the first server corresponds with the identity of the first server and if not then rejecting the short message back to the second server. Preferably, the step (c) comprises suppressing or removing at the first server the information in the supplemented short message identifying the first server prior to delivery of the short message to the first user apparatus. Suitably, the prepared short message only includes the information identifying the first server if the intended recipient is not a member of the second telephony network. Preferably, the step (c) comprises making an outgoing notification

call from the first server to the first user apparatus to notify the first user apparatus that a short message awaits delivery at the first server; and delivering the short message to the first user apparatus in response to  
5 an outgoing collection call from the first user apparatus to the first server.

Preferably, the first user apparatus is one of many each uniquely identified by a telephone number within the  
10 first telephony network; the first server is one of many each uniquely identified by a server ID; the second server is one of many within the second telephony network; and the second user apparatus is one of many each uniquely identified by a telephone number within the second  
15 telephony network.

Further according to the present invention there is provided a method for transmitting a short message between a first user apparatus in a first network environment and  
20 a second user apparatus in a second network environment, via at least one message server adapted to translate messages from the first environment to the second environment and vice versa, the method comprising the steps of: when transmitting a short message from the first  
25 user apparatus to the second user apparatus supplementing the message at the message server with information identifying the message server; and when transmitting a short message from the second user apparatus to the first user apparatus supplementing the message at the second  
30 user apparatus with information identifying the message server.

Also according to the present invention there is provided an apparatus for transmitting a short message, the apparatus for use with a first user apparatus of a first telephony network and with a second user apparatus  
5 of a second telephony network, the apparatus comprising: a first server having means for receiving a short message prepared on the first user apparatus, means for supplementing the short message with information identifying the first server, and means for forwarding the  
10 supplemented short message for delivery to the second user apparatus.

Preferably, the apparatus further comprises a second server for receiving the supplemented short message from  
15 the first server for delivery to the second user apparatus, the first server being a member of the first telephony network whilst the second server being a member of the second telephony network.

Further according to the present invention there is provided an apparatus for transmitting a short message, the apparatus for use with a first user apparatus of a first telephony network and a second user apparatus of a  
20 second telephony network, the apparatus comprising: a second server for receiving a short message prepared on  
25 the second user apparatus and for forwarding the short message for delivery to the first user apparatus via a first server based on information identifying the first server contained within the prepared short message.

30

Still further according to the present invention there is provided an apparatus for transmitting a short message, comprising a second user apparatus for preparing a short



message including information identifying a first server,  
the second user apparatus being a member of a second  
telephone network, the second user apparatus for  
transmitting the short message to a first user apparatus  
5 of a first telephony network via a second server of the  
second telephony network and a first server of the first  
telephony network.

In the apparatus of the present invention the first  
10 user apparatus may take any suitable form, and is  
preferably a combined voice and message telephony  
apparatus. Preferably, the first user apparatus comprises  
a data message system including user interface means such  
as a screen and a keyboard or keypad for the preparation  
15 and reading of text messages.

In one preferred embodiment the first user apparatus  
is an e-mail telephone adapted to send and receive SMS-  
type messages.

20

The first server is coupled to the second server by  
any suitable communications link including, but not  
limited to, a PSTN telephone line, a digital subscriber  
line such as an ISDN line, a kilostream line or a  
25 dedicated high speed data communications link.

Preferably, the second server is adapted to receive  
short message data packets forwarded from the first  
server. Preferably, the second server is arranged to  
30 deliver the short message data packets to an intended  
recipient apparatus. The second server and the recipient  
apparatus are members of a second network environment,  
preferably a cellular telephone network environment.

Preferably, the second server selects one recipient apparatus from amongst many potential recipient apparatus based upon a recipient identifier field in the short message data packet. The second server may take any  
5 suitable form, but preferably comprises a short message service centre for transmitting messages in a cellular telephone network. The apparatus may be provided in one location, or may be distributed amongst several separate processing portions.

10

Preferably, the second server is adapted to receive short message data packets from an originating user apparatus within the second network environment. The originating apparatus and the recipient apparatus in the  
15 second network environment may be a combined send and receive user apparatus. Ideally the recipient and originator apparatus are combined in a mobile telephone handset. Preferably, a message prepared by an originating apparatus in the second network and intended for a  
20 recipient apparatus in the first network includes a server identifier field in the short message data packet. Preferably, the server identifier field identifies a first server responsible for delivering messages to the recipient apparatus in the first network environment.  
25 Preferably, the second server is adapted to receive the short message data packet from the originating apparatus in the second network and to selectively identify the server identifier field. Preferably, the server, in response to determination of the second identifier field,  
30 forwards the short message data packet to the identified first server.

Preferably, the first server is adapted to receive short message data packets from the second server, including information identifying the first server. The first server preferably checks that the server identifier  
5 field correctly identifies the first server. Preferably, the first server suppresses or removes the server identifier field and then delivers the remainder of the short message data packet to the recipient apparatus in the first network. Preferably, the first server selects  
10 one intended recipient apparatus from amongst many potential recipient apparatus in the first network based upon the recipient identifier field.

According to another embodiment of the present  
15 invention there is provided a method for transmission of messages in a public switched telephone network, comprising the steps of: preparing a short message data packet; transmitting the short message data packet from an originating apparatus to a first server apparatus; and  
20 delivering the short message data packet from the first server apparatus to a recipient apparatus.

In this embodiment of the invention the originating apparatus and the recipient apparatus are both coupled to  
25 a public switched telephone network (PSTN). Preferably, the server apparatus selects the recipient apparatus from amongst many potential recipient apparatus based upon a recipient identifier field in the short message data packet. Preferably, the first server attempts delivery of  
30 the short message to the recipient apparatus substantially immediately after receipt thereof from the originator apparatus. Preferably, the receiver apparatus is adapted to answer an incoming call on a PSTN line, and to receive

a short message data packet from the first server. Preferably, a receiving apparatus and an originating apparatus are combined in a single user apparatus. Preferably, the user apparatus comprises user interface  
5 means such as a screen and a keyboard or keypad for preparing text messages for transmission to the first server, and for displaying text messages received from the first server.

10 For a better understanding of the invention, and to show how embodiments of the same may be carried into effect, reference will now be made, by way of example, to the accompanying diagrammatic drawings in which:

15 Figure 1 is a schematic diagram showing a prior art messaging system;

Figure 2 is a schematic diagram illustrating a preferred messaging system for use;

20

Figure 3 is a schematic diagram illustrating the structure of part of a prior art short message data packet;

25 Figure 4 illustrates part of a short message data packet used in preferred embodiments of the present invention;

Figure 5 is a schematic diagram illustrating another  
30 operation in the message system of Figure 2;

Figure 6 is a schematic diagram showing structure of another preferred messaging system; and

Figure 7 is a schematic diagram illustrating operation of another preferred messaging system.

5 Referring to Figure 2 a first preferred embodiment of the present invention will now be described starting with the example of sending a short message from a fixed line originator user apparatus 10 to a cellular telephone recipient user apparatus 40. The originator apparatus 10  
10 is coupled to a public switched telephone network 1 or equivalent such as a PABX. The recipient apparatus 40 is coupled to a cellular telephone network 2. Previously it has not been possible to send short messages between these two different networks due to inherent structural  
15 incompatibility. In particular, since the originator apparatus 10 is not a member of the cellular telephony network the messaging centre 30 cannot interpret an originator identifier in the format of the telephone number of the originator apparatus 10 within the PSTN  
20 environment 1. Further, the signal format required for data transmission in a PSTN is incompatible with the format required for transmission within a cellular telephone network. For example, different handshaking protocols apply.

25

The messaging apparatus of the preferred embodiment comprises a PSTN server 20 coupled to the PSTN 1 and coupled to a cellular message server 30. Communication between the PSTN message server 20 and the cellular  
30 message server 30 may take any suitable form, but ideally takes place over a fixed line communications link such as a PSTN telephone line, kilostream line or ISDN line.

In use, a short message is prepared on the originator apparatus 10 by the user and sent over the PSTN to the PSTN message server 20. The PSTN message server 20 translates the format of the short message data packet from a format suitable for use in the PSTN environment to a format suitable for use in a cellular telephone network environment. The PSTN message server 20 then forwards the translated short message to the cellular messaging centre 30. The cellular messaging centre 30 receives the translated message in a format equivalent to messages received from elsewhere in the cellular network environment. The cellular messaging centre 30 may then deliver the short message to the recipient apparatus 40 in the same manner as short messages originating within the cellular telephone network 2.

Figure 3 shows part of a typical known short message data packet 100 including fields relevant to the present invention namely a recipient identifier field 101, a free text message field 102 and an originator identifier field 103. The recipient identifier field 101 identifies the telephone number of the intended recipient within the relevant telephony network, in this case the cellular telephone network 2. Likewise, the originator identifier field 103 identifies the telephone number of the originator in the relevant network environment which in the prior art must also be the cellular telephony network 2. The text message field 102 is free text that may be prepared off-line by the user and is typically up to 160 characters although any suitable length may be used.

Figure 4 illustrates a short message data packet used in preferred embodiments of the present invention,

including a recipient identifier field 101, a message field 102, and an originator identifier field 103 as discussed for Figure 3. These fields are supplemented by an additional field, namely a server identifier field 104.

5 In use, the PSTN message server 20 supplements the originator identifier 103 by adding a server identifier 104 unique to the PSTN message server 20, after receiving a message from the originator 10 and prior to forwarding the message to the cellular message server 30. The server

10 identifier field 104 enables short messages to be transmitted between mutually incompatible networks such as a PSTN and a cellular telephone network. The server identifier field 104 may be placed at any convenient location within the short message data packet and/or may

15 comprise a plurality of fields in or around the short message data packet.

Referring now to Figure 5, transmission of a short message from a user apparatus 40 in the cellular telephone

20 environment 2 to a user apparatus 10 on the PSTN environment 1 will now be described. Such transmission may be a new message, or may be a reply to a message received from an originator 10 in the PSTN environment 1. In either case, the recipient is intended to be the user

25 apparatus 10 in the PSTN environment 1. The short message is prepared on the originator user apparatus 40 and sent to the cellular messaging centre 30. In processing the message the cellular messaging centre 30 cannot interpret the recipient identifier because this telephone number

30 does not correspond to a number within the cellular telephony network 2. The messaging centre 30 may attempt to interpret the recipient identifier 101 and fail. Preferably, in response to such a failure or in order to

avoid such a failure, the cellular message server 30 determines whether the server identifier 104 is present in the short message data packet. In effect, the server identifier 104 informs the cellular messaging centre 30 that this message is intended for a recipient on another network. In this example, the server identifier 104 identifies the PSTN message server 20 as being responsible for delivering the short message to the intended recipient 10. The cellular messaging centre 30 then forwards the message packet to the identified PSTN message server 20.

The PSTN message server 20 is able to correctly interpret the recipient identifier 101 to identify the intended recipient 10 because the recipient is a member of the PSTN network 1. The PSTN message server optionally removes or suppresses the server identifier 104. The PSTN server 20 then delivers the remainder of the short message data packet to the recipient 10. Delivery of the message may take any suitable form. For example, messages may be kept on the server until delivery is requested by the user. In one embodiment the server makes an outgoing notification call to the user apparatus indicating that messages await delivery from the server. In another embodiment the server attempts delivery of the message substantially immediately after receipt.

Referring to Figure 6, it is desired that a plurality of PSTN message servers are provided 20, 21, 22 etc operated, for example, by different commercial entities to provide a competing commercial environment. Similarly, it is desired that a plurality of cellular messaging centres 30, 31, 32 etc are provided, such that there is a many to many relationship with the plurality of PSTN message



servers. Here, the server identifier field 104 enables the  
or each cellular messaging centre 30 to identify the  
message as intended for a recipient in another network,  
and to identify the appropriate PSTN message server 20  
5 responsible for delivery of the message to the intended  
recipient.

The server identifier field 104 may take any suitable  
form. In the preferred embodiment the server identifier  
10 field 104 is an alphanumeric character string, preferably  
a numeric character string. Preferably the server  
identification field 104 is of a length sufficient to  
uniquely identify the desired PSTN message server amongst  
the plurality of message servers. Suitably, the server  
15 identifier field 104 comprises 3, 4, 5 or 6 numeric  
characters.

A method and apparatus have been described enabling  
transmission of short messages between incompatible  
20 networks. Advantageously, minimal additional equipment is  
required thereby minimising capital investment  
requirements. Further, minimal change to existing  
cellular messaging systems is required.

25 Referring now to Figure 7 the transmission of a  
message from an originator 10 on the PSTN network to a  
recipient 11 also on the PSTN network will now be  
described. A short message data packet is prepared and  
sent from the originating apparatus 10 to the PSTN message  
30 server 20. The PSTN message server 20 suitably determines  
that the recipient identifier field corresponds to a  
recipient in the PSTN network, rather than a recipient in  
another network as was the case in the embodiments

described above. Such determination may be made by, for example, inherent knowledge of the format of the recipient telephone number, such as a list of dialling codes. Here, the PSTN message server 20 dials the recipient 11 and attempts to deliver the short message direct to the recipient apparatus 11. If the first attempt fails, for example because the recipient apparatus 11 is busy, then the PSTN server may re-try later and/or may leave an indication on the recipient apparatus 11 that an attempt to deliver messages has been made. However, in most cases the delivery attempt is successful and the short message is stored on the recipient apparatus 11 such as in a memory, to be read offline by the user at a convenient time. Ideally the PSTN message server 20 attempts to deliver the short message immediately upon receipt and advantageously the user of the recipient apparatus 11 does not have to check with an external party such as the PSTN message server 20 to see whether messages are waiting delivery.

20

A messaging method and system have been described enabling fixed line to fixed line messaging.

The reader's attention is directed to all papers and documents which are filed concurrently with or previous to this specification in connection with this application and which are open to public inspection with this specification, and the contents of all such papers and documents are incorporated herein by reference.

30

All of the features disclosed in this specification (including any accompanying claims, abstract and drawings), and/or all of the steps of any method or

process so disclosed, may be combined in any combination, except combinations where at least some of such features and/or steps are mutually exclusive.

5        Each feature disclosed in this specification (including any accompanying claims, abstract and drawings), may be replaced by alternative features serving the same, equivalent or similar purpose, unless expressly stated otherwise. Thus, unless expressly stated otherwise,  
10 each feature disclosed is one example only of a generic series of equivalent or similar features.

The invention is not restricted to the details of the foregoing embodiment(s). The invention extend to any novel  
15 one, or any novel combination, of the features disclosed in this specification (including any accompanying claims, abstract and drawings), or to any novel one, or any novel combination, of the steps of any method or process so disclosed.

20

**Claims**

1. A method for transmitting a short message, comprising the steps of:

5

(a) preparing a short message at a first user apparatus (10);

(b) sending the prepared short message to a first message server (20); and

10

(c) delivering the short message to a second user apparatus (40);

15  
characterised in that:

the first user apparatus (10) and the first server (20) are both members of a first telephony network (1) whilst the second user apparatus (40) is a member of a separate second telephony network (2);

20

the step (c) includes supplementing the short message at the first server (20) with information (104) identifying the first server (20); and

25

25

the step (c) includes forwarding the supplemented short message from the first server (10) to a second server (30) being a member of the second telephony network (2) for delivery to the second user apparatus (40).

30

2. A method for transmitting a short message, comprising the steps of:

(a) preparing a short message at a second user apparatus (40);

(b) sending the prepared short message to a second  
5 server (30); and

(c) delivering the short message to a first user apparatus (10);

10 characterised in that:

the second user apparatus (40) and the second server (30) are both members of a second telephony network (2);

15 the step (a) includes supplementing the prepared message with information (104) identifying a first server (10);

20 the step (c) includes forwarding the supplemented short message to the identified first server (10) in a separate first telephony network (1) for delivery to the first user apparatus (10) of the first telephony network (1).

25 3. A method as set forth in claim 1 for transmitting a short message from the first user apparatus (10) to the second user apparatus (40), also including a method as set forth in claim 2 for transmitting a short message from the second user apparatus (40) to the first user apparatus  
30 (10).

4. A method as claimed in any of claims 1 to 3, wherein the first telephony network (1) is a fixed line

network such as a PSTN, whilst the second telephony network (2) is a cellular telephony network.

5. A method as claimed in any of claims 1 to 4,  
5 wherein the information (104) identifying the first server (20) comprises a server ID (104) which is unique to the first server (20).

6. A method as claimed in claim 5, wherein the step  
10 of supplementing the short message includes adding the server ID (104) as an additional field within the short message.

7. A method as claimed in claim 5 or 6, wherein the  
15 server ID (104) comprises a numeric data string of up to six characters.

8. A method as claimed in any of claims 1 to 7,  
wherein the step (c) includes translating the short  
20 message in the first server (20) from a format suitable for transmission in the first telephony network (1) to a format suitable for transmission in the second telephony network (2).

25 9. A method as claimed in claim 8, wherein the translation step produces a translated short message for forwarding to the second server (30) and delivery to the second user apparatus (40) in the same manner as short messages originating within the second telephony network  
30 (2).

10. A method as claimed in claim 2 or any claim dependent thereon, wherein in the step (a) the prepared

short message is a new message intended for the first user apparatus (10), or is a reply to a short message received from the first user apparatus (10).

5 11. A method as claimed in claim 10, wherein the prepared short message only includes the information (104) identifying the first server (20) if the intended recipient is not a member of the second telephony network (2).

10

12. A method as claimed in claim 2 or any claim dependent thereon, wherein the step (c) includes forwarding the short message to the identified first server (20) in response to the second server (30)  
15 detecting the presence of the information (104) identifying the first server (20), and/or in response to the second server (30) failing to resolve the intended recipient of the short message because the first user apparatus (10) is not a member of the second telephony  
20 network (2).

13. A method as claimed in claim 2 or any claim dependent thereon, wherein the step (c) includes confirming at the first server (20) that the information  
25 (104) identifying the first server (20) corresponds with the identity of the first server (20) and if not then rejecting the short message back to the second server (30).

30 14. A method as claimed in 2 or any claim dependent thereon, wherein the step (c) comprises suppressing or removing at the first server (20) the information (104) in the supplemented short message identifying the first

server (20) prior to delivery of the short message to the first user apparatus (10).

15. A method as claimed in any of claims 1 to 14,  
5 wherein the prepared short message includes at least a recipient identifier field (101) giving the telephone number of the intended recipient within the relevant telephony network (1,2); a free text message field (102); and an originator identifier field (103) giving the  
10 telephone number of the originator (10,40) within the relevant telephony network (1,2).

16. A method as claimed in any of claims 1 to 15,  
15 wherein the first user apparatus (10) is one of many each uniquely identified by a telephone number within the first telephony network (1); the first server (20) is one of many each uniquely identified by a server ID (104); the second server (30) is one of many within the second telephony network (2); and the second user apparatus (40)  
20 is one of many each uniquely identified by a telephone number within the second telephony network (2).

17. A method as claimed in claim 2 or any claim dependent thereon, wherein the step (c) comprises making  
25 an outgoing notification call from the first server (20) to the first user apparatus (10) to notify the first user apparatus that a short message awaits delivery at the first server (20); and delivering the short message to the first user apparatus (10) in response to an outgoing  
30 collection call from the first user apparatus (10) to the first server (20).



18. A method for transmitting a short message between a first user apparatus (10) in a first network environment (1) and a second user apparatus (40) in a second network environment (2), via at least one message server (20) adapted to translate messages from the first environment (1) to the second environment (2) and vice versa, the method comprising the steps of:

when transmitting a short message from the first user apparatus (10) to the second user apparatus (40), supplementing the message at the message server (20) with information (104) identifying the message server; and

when transmitting a short message from the second user apparatus (40) to the first user apparatus (10), supplementing the message at the second user apparatus (40) with information (104) identifying the message server (20).

19. An apparatus for transmitting a short message, the apparatus for use with a first user apparatus (10) of a first telephony network (1) and with a second user apparatus (40) of a second telephony network (2), the apparatus comprising:

a first server (20) having means for receiving a short message prepared on the first user apparatus (10), means for supplementing the short message with information (104) identifying the first server (20), and means for forwarding the supplemented short message for delivery to the second user apparatus (40).

20. An apparatus as claimed in claim 19, further comprising a second server (30) for receiving the supplemented short message from the first server (20) for delivery to the second user apparatus (40), the first  
5 server (20) being a member of the first telephony network (1) whilst the second server (30) being a member of the second telephony network (2).

21. An apparatus for transmitting a short message, the  
10 apparatus for use with a first user apparatus (10) of a first telephony network (1) and a second user apparatus (40) of a second telephony network (2), the apparatus comprising:

15 a second server (30) for receiving a short message prepared on the second user apparatus (40) and for forwarding the short message for delivery to the first user apparatus (10) via a first server (20) based on information (104) identifying the first server (20)  
20 contained within the prepared short message.

22. An apparatus as claimed in claim 21, comprising a first server (20) for receiving the short message from the second server (30), confirming the identity of the first  
25 server with the identity information (104) given in the short message, and delivering the short message to the first user apparatus (10).

23. An apparatus for transmitting a short message,  
30 comprising a second user apparatus (40) for preparing a short message including information (104) identifying a first server (10), the second user apparatus (40) being a member of a second telephony network (2), the second user

apparatus (40) for transmitting the short message to a first user apparatus (10) of a first telephony network (1) via a second server (30) of the second telephony network (2) and a first server (20) of the first telephony network  
5 (1).

24. A method for transmission of messages in a public switched telephone network, comprising the steps of: preparing a short message data packet; transmitting the  
10 short message data packet from an originating apparatus to a first server apparatus; and delivering the short message data packet from the first server apparatus to a recipient apparatus.

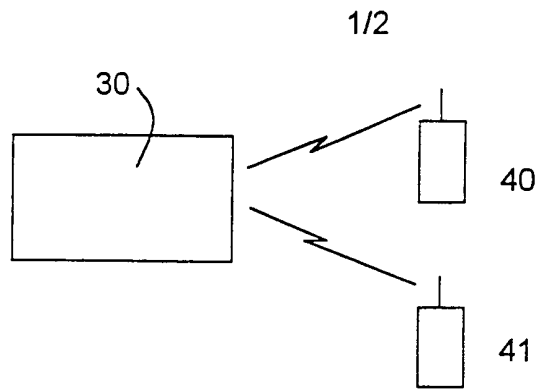


FIG 1

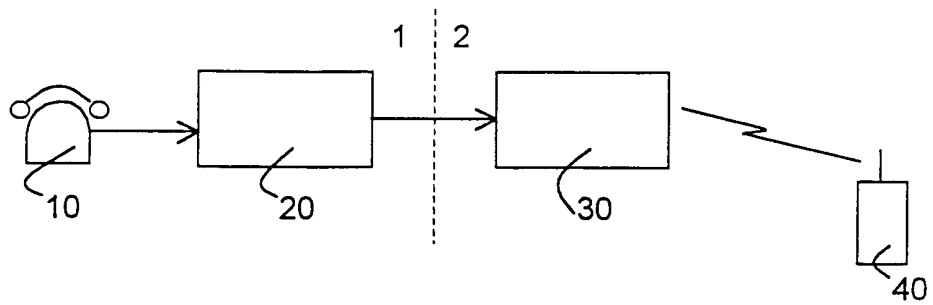


FIG 2

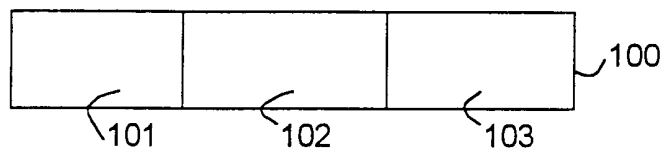


FIG 3

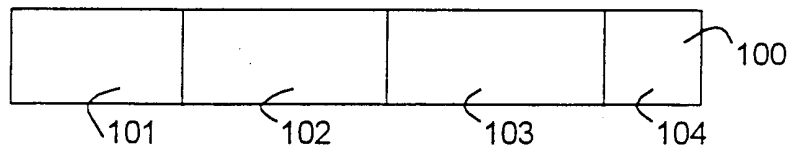


FIG 4

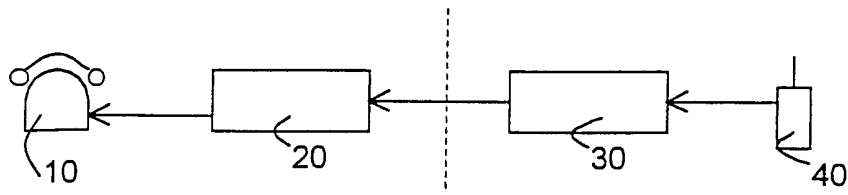


FIG 5

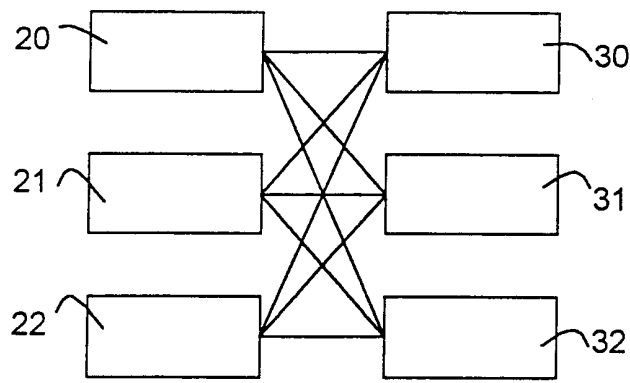


FIG 6

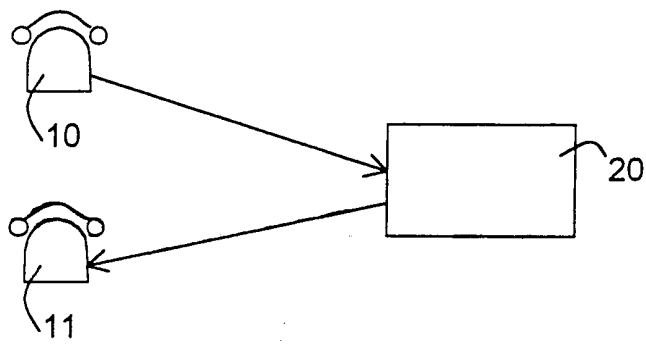


FIG 7

# INTERNATIONAL SEARCH REPORT

Internal Application No

PCT/GB 00/02445

**A. CLASSIFICATION OF SUBJECT MATTER**

IPC 7 H04Q7/22

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 878 397 A (STILLE MATS ET AL) 2 March 1999 (1999-03-02) column 3, line 19 - line 55 column 5, line 38 -column 6, line 30 column 7, line 10 -column 8, line 36 column 9, line 59 -column 10, line 28 ---	1-6, 10-24
X	EP 0 923 258 A (NORTEL DASA NETWORK SYSTEMS GM) 16 June 1999 (1999-06-16)  column 29, line 45 -column 30, line 29 column 36, line 28 -column 38, line 26 --- -/--	1-4, 8-11, 14-16, 19-24

Further documents are listed in the continuation of box C.

Patent family members are listed in annex.

° Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

30 August 2000

Date of mailing of the international search report

05/09/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
 NL - 2280 HV Rijswijk  
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
 Fax: (+31-70) 340-3016

Authorized officer

Rothlübbers, C

# INTERNATIONAL SEARCH REPORT

Inter national Application No PCT/GB 00/02445
--

**C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT**

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	DE 196 02 449 A (NOKIA MOBILE PHONES LTD ;NOKIA TELECOMMUNICATIONS OY (FI)) 22 August 1996 (1996-08-22) page 3, line 18 - line 27 page 5, line 16 - line 45 -----	1-24
A	DE 196 40 219 A (SIEMENS AG) 2 April 1998 (1998-04-02) column 3, line 28 - line 52 column 4, line 26 - line 29 column 5, line 60 -column 6, line 7 -----	1-24

# INTERNATIONAL SEARCH REPORT

information on patent family members

Inter- nal Application No
PCT/GB 00/02445

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5878397 A	02-03-1999	AU 3563897 A WO 9802005 A	02-02-1998 15-01-1998
EP 0923258 A	16-06-1999	CA 2249974 A	07-04-1999
DE 19602449 A	22-08-1996	FI 950783 A AU 4719796 A WO 9626616 A FR 2730889 A GB 2298339 A, B IT MI960221 A JP 11500877 T NL 1002398 C NL 1002398 A SE 9600185 A	21-08-1996 11-09-1996 29-08-1996 23-08-1996 28-08-1996 07-08-1997 19-01-1999 26-01-1999 22-08-1996 21-08-1996
DE 19640219 A	02-04-1998	CN 1231806 A WO 9815142 A EP 0929981 A	13-10-1999 09-04-1998 21-07-1999