

19



Europäisches Patentamt
European Patent Office
Office européen des brevets



11 Publication number:

0 404 948 A1

12

EUROPEAN PATENT APPLICATION
published in accordance with Art.
158(3) EPC

21 Application number: **89907819.0**

51 Int. Cl.⁵: **B41M 5/26**

22 Date of filing: **28.06.89**

86 International application number:
PCT/JP89/00645

87 International publication number:
WO 90/00116 (11.01.90 90/02)

30 Priority: **01.07.88 JP 164239/88**

71 Applicant: **DAI NIPPON INSATSU KABUSHIKI KAISHA**
1-1, Ichigaya-Kaga-cho 1-chome Shinjuku-ku Tokyo 162-01(JP)

43 Date of publication of application:
02.01.91 Bulletin 91/01

72 Inventor: **ASAHI, Koichi**
6-1-9-502, Tajima,Urawa-shi Saitama 336(JP)
Inventor: **EGASHIRA, Noritaka**
10-1, Arai 3-chome, Ichikawa-shi Chiba 272-01(JP)

84 Designated Contracting States:
DE FR GB

74 Representative: **Behn, Klaus, Dipl.-Ing.**
Patentanwalt Lindenberg 34 D-8134 Pöcking bei München(DE)

54 **IMAGE TRANSFER FORMATION ONTO CARD.**

57 This invention relates to an image transfer formation method which transfers an image onto the surface of a card by thermal pressure bonding by use of a thermal transfer receiving sheet equipped with a peel layer and an image receiving layer for accepting dyes transferred from a dye transfer sheet on one of the surfaces of a substrate. This transfer formation method is characterized in that the thermal transfer receiving sheet and the card are superposed, heated and pressed for thermal pressure bonding at 130 to 180 °C and 3 to 15 kg/cm² while they are being passed through a pair of pressing rubber rollers having a hardness of 70 to 90°.

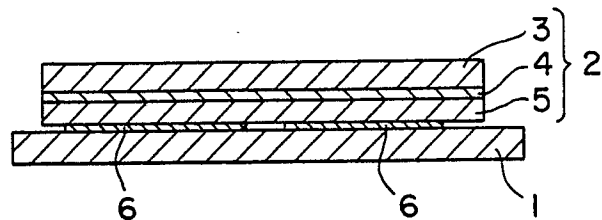


FIG. 1

EP 0 404 948 A1

TITLE MODIFIED
see front page

IMAGE TRANSFER METHOD FOR CARDS

FIELD OF THE INVENTION

The present invention relates to a method for
5 transferring images onto cards.

BACKGROUND OF THE INVENTION

In recent years, there have been many types of
prepaid cards being used and of these many types, those
that have various types of patterns and designs have been
10 being marketed. Along with the widening use of such
prepaid cards, there has been an increasing demand by
persons wishing to have cards made with their own
individual designs and motifs, and special blank cards
are being marketed so that people can make their own
15 designs and motifs on them afterwards.

The general method used in order to have an original
motif or pattern on a conventional blank card is to
employ direct printing onto the surface of the card.

However, when this method is used, there is a
20 considerable lack of immediacy as well as the fact that
the method is not suited to the production of small
quantities such as one or two cards, and this means that
the cost per card is quite high. Not only this, the
printed designs are generally exposed on the surface of
25 the card and so there are problems of them being easily
scratched and lacking in resistance to plasticizer.

As a result of considering the problems involved in
the conventional method, the inventors considered the
photograph-quality images that are now possible due to
30 recent advances in thermal transfer technology using the
sublimation transfer method, and concluded that if the
sublimation transfer recording method was used to
transfer an image drawn beforehand onto a thermal
transfer sheet, onto a prepaid card, then it would be
35 possible to manufacture original cards far more
inexpensively than by the conventional printing method.
However, when a laminating machine is used to press and

heat and thereby laminate a thermal transfer sheet and a card so that the image is transferred, the lamination performed by a conventional laminating machine involves temperature and pressure conditions (such as a heating
5 temperature of between 100°C and 130°C, and a pressure of 0.5 to 3.0 kg/cm²) made it difficult to achieve a transferred image which was clear and without cracking. Moreover, although it is possible to lower the heating temperature to 160°C (as has been proposed on PCT/JP
10 87/00228, P66), it is not possible to achieve a precise image by only the adjustment of the transfer temperature.

SUMMARY OF THE INVENTION

With respect to this problem, the inventors concluded that it would be possible to complete the
15 present invention if the hardness of the pair of rubber rollers in the laminating device was limited to a certain range, and if the heating temperature and the pressure of these pressure rollers were also controlled to within certain ranges, and thereby make it possible to achieve
20 clear image to prepaid cards.

The objects of the invention can be achieved by providing a method for transferring an image to a card, comprising the steps of: preparing a thermal transfer sheet comprising a base layer, a separation layer and an
25 image receiving layer for receiving dyes that move from a dye transfer sheet laminated in this order; forming an image by a sublimation transfer recording method on said image receiving layer provided in said thermal transfer sheet; placing said thermal transfer sheet on said card
30 in an overlapping relation; passing the overlapped thermal transfer sheet and said card through a pair of rubber rollers of a laminating machine of a hardness selected in a range of 70° to 90°, with the rollers heated in a range of 130° to 180°C and urged to each
35 other under a pressure of 3 to 15 kg/cm²; and separating at least said base layer out of said separation layer so

that said image receiving layer is transfer laminated to said card,

and the method mentioned above wherein said passing step of said thermal transfer sheet and said card is carried out while the rubber rollers are rotated at a rotating speed selected in a range of 0.5 to 1.5 cm/sec.

BRIEF DESCRIPTION OF THE DRAWINGS

In the accompanying drawings indicating an embodiment of the image transfer method for cards, according to the present invention:

FIG. 1 is a longitudinal sectional view of the status where the thermal transfer sheet and the card are in alignment,

FIG. 2 is a similar view to that of FIG. 1, but where another thermal transfer sheet is used,

FIG. 3 is an outline sectional view of one of the processes of the present method, and

FIG. 4 is an outline sectional view indicating a different state for FIG. 3.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

In FIG. 1, reference numeral 1 is a card, and reference numeral 2 is a thermal transfer sheet. The thermal transfer sheet 2 has a base layer 3, a separation layer 4 and an image receiving sheet 5 in order to receive the dye material that moves from a dye transfer sheet (not indicated in the figure). In addition, the image receiving sheet 5 is provided with an image 6 that has been formed by dye material moving from the dye transfer sheet by the sublimation transfer recording method.

After transfer, the base layer 3 is separated from the separation layer 4 and a material such as plastic film, synthetic paper or cellulose fiber paper or the like is used for this base layer 3. Of these substances, the plastic film that is used can be of polyester, PVC, polypropylene, polyethylene, polycarbonate, polyamide or the like. In addition, it is also possible to use foam

films that have been slightly foamed and white films that have been manufactured by adding a filler to one of the above types of film.

The synthetic paper that is used can be a mixture of
5 a polyolefin resin or some other type of synthetic resin
and an inorganic filler or the like, with this mixture
then being extruded, or it can be a polystyrene resin, a
polyester resin, a polyolefin resin or some other film
surface which has had waterproof pigment applied. The
10 cellulose fiber paper that is used can be Kent paper,
coating paper, cast-coated paper, synthetic rubber paper
or synthetic resin paper or paper that has been
impregnated with synthetic resin emulsion, or the like.
In addition, it is possible to use a plastic film,
15 cellulose or a fiber paper that has been adhered to a
base material. In this case, the base material can be
cellulose paper to which a foamed layer has been adhered
to both sides.

The separation layer 4 can be formed by coating the
20 base layer 3 with an acrylic resin, an urethane resin, a
vinylchloride-vinylacetate resin, an acetyl cellulose, a
silicon resin or some other type of transparent resin.
This separation layer 4 covers the image receiving sheet
5 after the base layer 3 has been separated, and
25 functions as a protective layer. Wax or effectively
transparent organic or inorganic particles can be added
to the separation layer 4. By the addition of this
additive, it is possible to improve the scratch
resistance of the separation layer 4. In addition, it is
30 also possible to include in the separation layer 4 a
photo-stabilizer that absorbs ultraviolet light.

The image receiving sheet 5 contains dyes that move
from the dye transfer sheet when the image is formed, and
is of a resin that can receive the dyes and thus form an
35 image. Examples of such resins are the following
synthetic resins used individually, or as a mixture of
two or more.

(a) Those having ester bonds

Polyester resins (other than those which are phenyl modified), polyacrylate ester resins, polycarbonate resins, polyvinyl acetate resins, styrene acrylate
5 resins, vinyltoluene acrylate resins and the like.

(b) Those having urethane-bonds

Polyurethane resins and the like

(c) Those having amide-bonds

Polyamide resins (such as nylon) and the like

10 (d) Those having urea-bonds

Urea resins and the like

(e) Those having other bonds of high polarities

Polycaprolactam resins, polystyrene resins, polyvinyl chloride resins, polyacrylonitrile resins and
15 the like.

In addition to the resins listed above, a mixture comprising a saturated polyester and a copolymer of vinyl chloride and vinylacetate may also be used as a resin to form the image receiving layer. The vinylchloride
20 content of the copolymer is desirably selected from a range of up to 85 to 97 wt%, and the degree of polymerization is desirably selected from a range of from 200 to 800. In addition to the vinylchloride-vinylacetate copolymer, the vinylchloride-vinylacetate
25 copolymer may contain a vinyl alcohol component, a maleic acid component or the like.

Furthermore, in accordance with necessity, the image receiving sheet 5 may also contain an ultraviolet light absorbing agent, an antioxidant, a plasticizer, a pigment
30 lubricant, and silicon oil or some other separation agent.

Moreover, the thermal transfer sheet 2 is not limited to the one indicated in FIG. 1, and can also be the one indicated in FIG. 2. In FIG. 2, those parts that
35 are the same as those in FIG. 1 are indicated using the same numerals. The thermal transfer sheet 2 of FIG. 2 is provided with an adhesive layer 3a on a base layer 3, and

on this adhesive layer 3a are successively formed a separation layer 4 and an image receiving sheet 5. In addition, the image receiving sheet 5 is provided with an image 6 which is formed by dyes moving from a dye transfer sheet (not indicated in the figure) by the sublimation transfer recording method. Of these layers, the adhesive layer 3a can be separated from both the base layer 3 and the separation layer 4.

In FIG. 2, a transparent resin film of 3.0 to 50 μm thickness can be used as the separation layer 4. This transparent film can be a polyethylene terephthalate, a cellulose resin such as cellophane, an acrylic series resin or some other type of transparent vinylchloride film.

In addition, the card 1 to which the image of the thermal transfer sheet 2 is to be transferred to can be a paper card or cellulose base material to which polyethylene terephthalate, a vinylchloride or some other type of plastic card has been press-coated to form a paper-plastic card. There are no particular restrictions however. In addition, the card can also be a magnetic recording card, or a card containing IC chips or the like. Furthermore, it is also possible to use the blank prepaid cards that are marketed.

In FIG. 3, reference numeral 7 represents rubber pressing rollers, and reference numeral 8 represents a heater that covers the rubber pressing rollers. Then, the thermal transfer sheet 2 and the card 1 are made to overlap so that the image receiving sheet 5 of the thermal transfer sheet 2 is in contact with the surface of the card 1 and then the overlapping unit 9 is passed between rubber pressing rollers 7, 7 and the overlapping unit 9 is pressed and heated. A heating temperature of between 130°C and 180°C is necessary but a heating temperature of between 140°C and 160°C is desirable. If the heating temperature is less than 130°C then there will not be proper transfer of the thermal transfer sheet

to the card 1 and if the heating temperature is greater than 180°C, then the card 1 will deform due to the excessive heat. In addition, the pressure of the rubber pressing rollers 7 must be between 3 and 15 kg/cm² but a pressure of between 10 and 13 kg/cm² is desirable. If the pressure is less than 3 kg/cm² then the transfer to the card 1 will not be proper but if the pressure exceeds 15 kg/cm² then the card 1 will deform and the deformation will also occur in the rubber pressing rollers 7 themselves. Adjusting the pressure of the rubber pressing rollers 7 is enabled by a configuration that varies the interval between the rubber pressing rollers 7, this interval between the rubber pressing rollers 7 (normally the interval between the shafts) can be adjusted to achieve a predetermined pressure but the pressure can also be adjusted by changing the thickness of the rubber or the diameter of the rollers.

The hardness of the rubber of the rubber pressing rollers 7 is 70° to 90° but it is necessary to use rubber with a hardness of between 80° and 85°. Moreover, the rubber hardness is measurable by a rubber penetrometer. If the rubber hardness of the rubber pressing rollers 7 is less than 70° or greater than 90°, then it will be difficult to obtain a pressure exceeding 3 kg/cm². Examples of rubber which has the desired degree of hardness are silicon rubber, ethylene-propylene rubber, styrene-butadiene rubber or the like. In addition, the rubber pressing rollers 7 should rotate at a speed of rotation of between 0.5 and 1.5 cm/sec. and desirably, at a speed of rotation of between 0.8 and 1.2 cm/sec. At such a speed of rotation, it is possible to apply the optimum amount of heat to heat-and-temperature adhere the thermal transfer sheet 2 to the card 1.

After the thermal transfer sheet 2 has been heat-and-temperature adhered to the card 1 in this manner, the base layer 3 is separated from the separation layer 4 (Refer to FIG. 1) or the base layer 3 and the adhesive

layer 3a are separated from the separation layer 4 (Refer to FIG. 2).

Moreover, in FIG. 3, reference numeral 10 is a pull roller provided according to necessity, and need not be
5 provided.

Instead of the heater 8 indicated in FIG. 3, shown in FIG. 4 is a heating method in which a halogen lamp 11 is provided as the means of heating. In addition, reference numeral 12 in FIG. 4 represents a heat-
10 discharge plate which allows efficient cooling of the card 1 if it is provided for a process after the rubber pressing rollers 7.

The following is a more detailed description of the present invention.

15 Example 1:

In a laminating machine having two rubber pressing rollers with a rubber hardness of 85°, a rubber thickness of 2 mm and diameters of 28 mm, the two rubber rollers are mounted so that the distance between the shafts of
20 the rubber rollers is 28 mm. When the rubber pressing rollers are mounted in this manner, the rubber roller pressure was measured by a press scale (of FUJI FILM CO.) and was found to be 11.0 kg/cm². Then, two halogen lamps were placed in the vicinity of these rubber pressing
25 rollers 7 and the temperature of the rubber roller surface was detected by sensors placed in the vicinity of the rubber roller surface. The output of the halogen lamps was controlled by a thermostat so that the temperature of the rubber roller surface was held at
30 approximately 155°C. In addition, the speed of rotation of the rubber rollers was set at 1.0 cm/sec. In this case, the sensor that was used to detect the temperature of the surface was a surface thermometer such as the HL-260 Thermometer (of the ANRITSU KEIKI K.K.).

35 The base material was formed from foamed polyethylene terephthalate film and one surface was provided with a separation layer of acryl resin, and then

an image receiving layer comprising a blended resin blended of polyester and a vinylchloride-vinylacetate copolymer on the surface of a separation layer. Then the HITACHI LTD. VY-S100 dye transfer sheet was used and a
5 videoprinter VY-110 (HITACHI LTD.) was used to form an image on the image receiving layer and then the thermal transfer sheet was made to overlap a prepaid card so that image receiving layer surface was in contact with the surface of the prepaid card. Then, this overlapping unit
10 was passed through a laminating apparatus having the conditions described above, and was heated and pressed by the rubber pressing rollers to be heat-and-pressure bonded. After cooling, the obtained card had a clear photograph-quality image which the image receiving layer
15 being protected by the separation layer. The image of this card could not be removed even by the use of cellophane tape. In addition, there was no deformation of the card or unevenness of transfer, and furthermore, there were no air bubbles (causing lifting of the layer).
20 Other examples 2 through 21, Comparative examples 1 through 6:

In the same manner as has been described above, a thermal transfer sheet and a prepaid card were used with a laminating apparatus having heating and pressing by
25 rubber pressing rollers with the temperature, rubber hardness and speed of rotation varied as indicated in Table 1, and the same transfer process performed. The states of the cards obtained are indicated in Table 1.

Moreover, the following standards were used for the
30 evaluation of the deformation of the card and the separation test of Table 1.

Evaluation standards for separation test

- ... Difficult to remove image by a separation test using cellophane tape.
- 35 △ ... Slight separation of image by a separation test using cellophane tape was recognized

but this was not sufficient to pose an obstacle to use.

x ... There was significant removal of the image by a separation test using cellophane tape.

5 Evaluation standards for card deformation

○ ... No deformation

△ ... Slight curl but not sufficient to pose an obstacle to use.

x ... Too much curl to enable use.

10

15

20

25

30

35

Table 1

	Heating temperature (°C)	Pressing Pressure (kg/cm ²)	Rubber hardness (°)	Speed of rotation of rubber rollers (cm/sec.)	State of card		
					Separation test	Card deformation	Transfer state
Test example 2	145	9.0	85	0.5	○	△	Favorable
"	145	9.0	85	1.0	○	○	Favorable
"	145	9.0	85	1.5	△	○	Slightly poor adhesion but no problems for use
"	145	11.0	85	0.5	○	△	Favorable
"	145	11.0	85	1.0	○	○	Favorable
"	145	11.0	85	1.5	△	○	Slightly poor adhesion but no problems for use
"	145	15.0	85	0.5	○	△	Favorable
"	145	15.0	85	1.0	○	○	Favorable
"	145	15.0	85	1.5	△	○	Slightly poor adhesion but no problems for use

Table 1 (continued)

	Heating temperature (°C)	Pressing Pressure (kg/cm ²)	Rubber hardness (°)	Speed of rotation of rubber rollers (cm/sec.)	State of card		
					Separation test	Card deformation	Transfer state
Test example 11	155	3.0	85	0.5	○	○	Favorable
" 12	155	3.0	85	1.0	△	○	Favorable
" 13	155	3.0	85	1.5	△	○	Slightly poor adhesion but no problems for use
" 14	155	9.0	85	0.5	○	△	Favorable
" 15	155	9.0	85	1.0	○	○	Favorable
" 16	155	9.0	85	1.5	△	○	Slightly poor adhesion but no problems for use
" 17	155	11.0	85	0.5	○	△	Slight transfer unevenness and lifting but no problems for use
" 18	155	11.0	85	1.5	△	○	Slightly poor adhesion but no problems for use
" 19	155	15.0	85	0.5	○	△	Slight transfer unevenness and lifting but no problems for use

Table 1 (continued)

	Heating temperature (°C)	Pressing Pressure (kg/cm ²)	Rubber hardness (°)	Speed of rotation of rubber rollers (cm/sec.)	State of card		
					Separation test	Card deformation	Transfer state
Test example 20	155	15.0	85	1.0	○	○	Favorable
" 21	155	15.0	85	1.5	○	○	Favorable
Comparison example 1	120	2.0	60	1.0	×	○	No adhesion
" 2	130	2.0	60	1.0	×	○	No adhesion
" 3	155	2.0	60	1.0	×	○	Poor adhesion
" 4	170	2.0	60	1.0	○	×	Much transfer unevenness and lifting
" 5	200	2.0	85	1.0	○	×	Much transfer unevenness and lifting
" 6	180	2.0	60	1.0	○	×	Much transfer unevenness and lifting

As has been described above, according to the method of the present invention, after forming an image on an image receiving layer of a thermal transfer sheet, the image receiving layer is transfer laminated to a card, so that when compared to the method that an image is formed using conventional printing, it is possible to manufacture cards with original designs more promptly and more inexpensively, and the method of present invention is more suitable for the manufacture of small lots such as one or two cards. In addition, the manufacture of cards having a separation layer to protect the image of the card is also simple. Furthermore, according to the method of the present invention, by passing the card and a thermal transfer sheet through a pair of heating and pressing rollers of a laminating machine with a hardness of 70° to 90° while simultaneously heating to a temperature of 130°C to 180°C and applying a pressure of 3 to 15 kg/cm² to heat and press the thermal transfer sheet and the card, it is possible to have definite transfer of the image receiving layer of the thermal transfer sheet upon which the image is formed, to the card, and it is also possible to manufacture cards having a clear image which does not separate. Still furthermore, if the lamination is performed with a speed of rotation of the pressure rollers in the laminating apparatus of between 0.5 and 1.5 cm/sec., then it is possible to have sufficient heating to heat-and-press laminate the thermal transfer sheet to the card.

INDUSTRIAL APPLICABILITY

As has been described above, according to the method of the present invention, for the thermal transfer of images to cards, it is possible to have any desired design or motif applied to various types of prepaid card, ID cards and the like.

CLAIMS:

1. A method for transferring an image to a card, comprising the steps of:

preparing a thermal transfer sheet comprising a base layer, a separation layer and an image receiving layer for receiving dyes that move from a dye transfer sheet laminated in this order;

forming an image by a sublimation transfer recording method on said image receiving layer provided in said thermal transfer sheet;

placing said thermal transfer sheet on said card in an overlapping relation;

passing the overlapped thermal transfer sheet and said card through a pair of rubber rollers of a laminating machine of a hardness selected in a range of 70° to 90°, with the rollers heated in a range of 130°C to 180°C and urged to each other under a pressure of 3 to 15 kg/cm²; and

separating at least said base layer out of said separation layer so that said image receiving layer is transfer laminated to said card.

2. The method set forth in claim 1 wherein said passing step of said thermal transfer sheet and said card is carried out while the rubber rollers are rotated at a rotating speed selected in a range of 0.5 to 1.5 cm/sec.

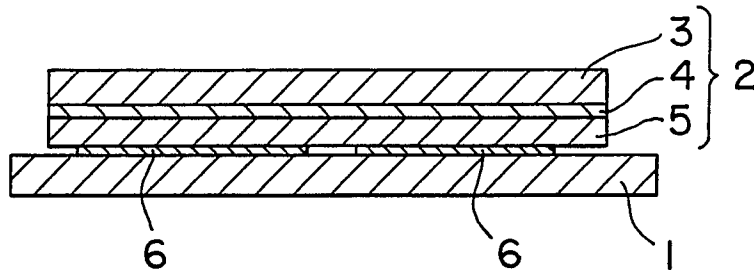


FIG. 1

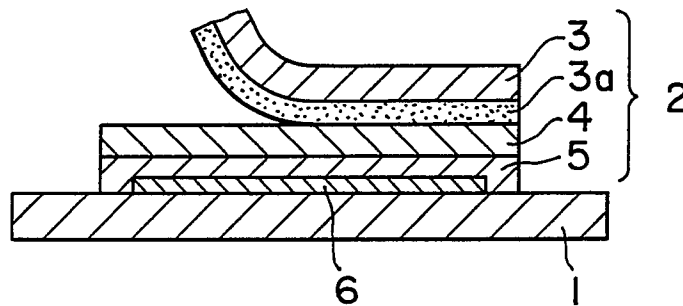


FIG. 2

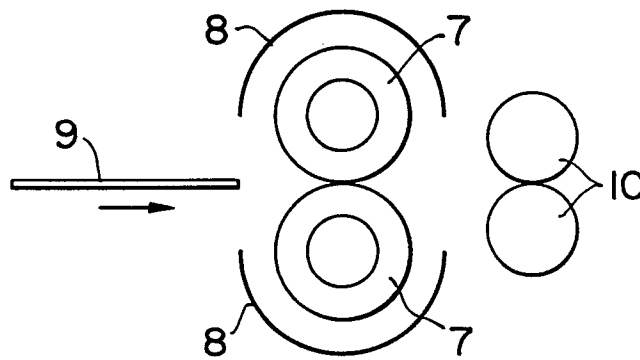


FIG. 3

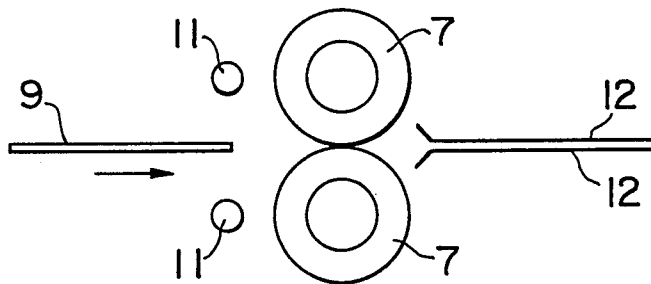


FIG. 4

INTERNATIONAL SEARCH REPORT

International Application No PCT/JP89/00645

I. CLASSIFICATION OF SUBJECT MATTER (if several classification symbols apply, indicate all) ⁶				
According to International Patent Classification (IPC) or to both National Classification and IPC				
Int. Cl ⁴	B41M5/26			
II. FIELDS SEARCHED				
Minimum Documentation Searched ⁷				
Classification System	Classification Symbols			
IPC	B41M5/26, B41F17/00, B41F17/14, B41J3/20			
Documentation Searched other than Minimum Documentation to the Extent that such Documents are Included in the Fields Searched ⁸				
Jitsuyo Shinan Koho	1927 - 1988			
Kokai Jitsuyo Shinan Koho	1971 - 1988			
III. DOCUMENTS CONSIDERED TO BE RELEVANT ⁹				
Category ⁹	Citation of Document, ¹¹ with indication, where appropriate, of the relevant passages ¹²	Relevant to Claim No. ¹³		
Y	JP, A, 63-87284 (Dainippon Printing Co., Ltd.) 18 April 1988 (18. 04. 88) Page 8, upper left column (Family: none)	1		
Y	JP, A, 63-51200 (Ichida Susumu) 4 March 1988 (04. 03. 88) Page 2, lower right column (Family: none)	1		
Y	JP, A, 57-181869 (Tokai Seiki Kabushiki Kaisha) 9 November 1982 (09. 11. 82) (Family: none)	1, 2		
Y	JP, A, 52-136013 (Kanebo, Ltd.) 14 November 1977 (14. 11. 77) Page 4, upper left column (Family: none)	1, 2		
Y	JP, A, 63-81093 (Dainippon Printing Co., Ltd.) 11 April 1988 (11. 04. 88) (Family: none)	1, 2		
<p>¹⁰ Special categories of cited documents:</p> <table style="width: 100%; border: none;"> <tr> <td style="width: 50%; border: none;"> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> </td> <td style="width: 50%; border: none;"> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"&" document member of the same patent family</p> </td> </tr> </table>			<p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p>	<p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"&" document member of the same patent family</p>
<p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p>	<p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"&" document member of the same patent family</p>			
IV. CERTIFICATION				
Date of the Actual Completion of the International Search	Date of Mailing of this International Search Report			
September 10, 1989 (10. 09. 89)	September 18, 1989 (18. 09. 89)			
International Searching Authority	Signature of Authorized Officer			
Japanese Patent Office				