



US00D826740S

(12) **United States Design Patent** (10) **Patent No.:** **US D826,740 S**
Stevens et al. (45) **Date of Patent:** **** Aug. 28, 2018**

(54) **INCONTINENCE SENSOR PAD**
(71) Applicant: **G2i, Inc.**, Palo Alto, CA (US)
(72) Inventors: **Thomas Reed Stevens**, Palo Alto, CA (US); **Ivan J. Goering**, Palo Alto, CA (US)
(73) Assignee: **G2i, Inc.**, Palo Alto, CA (US)
(**) Term: **15 Years**
(21) Appl. No.: **29/585,445**

5,330,817 A 7/1994 Arnott et al.
5,537,095 A 7/1996 Dick et al.
5,760,694 A 6/1998 Nissim et al.
6,774,800 B2 8/2004 Friedman et al.
6,832,507 B1 12/2004 van de Berg et al.
7,977,529 B2 7/2011 Bergman et al.
8,237,572 B2 8/2012 Clement et al.
8,395,014 B2 3/2013 Helmer et al.
8,398,603 B2 * 3/2013 Thirstrup A61F 5/445
602/41
8,962,909 B2 2/2015 Groosman et al.
9,107,776 B2 8/2015 Bergman et al.
9,224,102 B2 12/2015 Barda et al.

(Continued)

(22) Filed: **Nov. 23, 2016**
(51) **LOC (11) Cl.** **10-04**
(52) **U.S. Cl.**
USPC **D10/56; D24/124; D24/126**
(58) **Field of Classification Search**
USPC D10/56; D24/124, 126, 127
CPC A61F 13/42; A61F 2013/421; A61F 2013/422; A61F 2013/423; A61F 2013/424; A61F 2013/425; A61F 2013/426; A61F 2013/427; A61F 2013/428; A61F 2013/429; A61F 13/45; A61F 13/47; A61F 2013/4708; A61F 13/49; A61F 2013/49068; A61F 2013/49069; A61F 2013/49071; A61F 2013/49073; A61F 2013/49074; A61F 2013/49076; A61F 2013/49077; A61F 2013/49079; A61F 2013/4908; A61F 2013/49082; A61F 2013/49084; A61F 2013/49085

See application file for complete search history.

(56) **References Cited**
U.S. PATENT DOCUMENTS

3,971,371 A 7/1976 Bloom
4,319,232 A 3/1982 Westphal et al.
4,347,503 A 8/1982 Uyehara
5,137,033 A 8/1992 Norton

FOREIGN PATENT DOCUMENTS

AU 2007201952 B2 5/2007
AU 2010224306 A1 10/2010

(Continued)

Primary Examiner — Antoine D Davis
(74) *Attorney, Agent, or Firm* — The Webb Law Firm

(57) **CLAIM**


The ornamental design for an incontinence sensor pad, as shown and described.

DESCRIPTION

FIG. 1 is a front perspective view of an incontinence pad sensor coupled in accordance with a first embodiment of the present design;
FIG. 2 is a top view thereof;
FIG. 3 is bottom view thereof;
FIG. 4 is a right view thereof;
FIG. 5 is a left view thereof;
FIG. 6 is front view thereof; and,
FIG. 7 is rear view thereof.

The broken line showings provided herein are environmental only and not part of the claimed design. The dashed-dotted line showings provided herein illustrate a claimed perforation line.

1 Claim, 4 Drawing Sheets

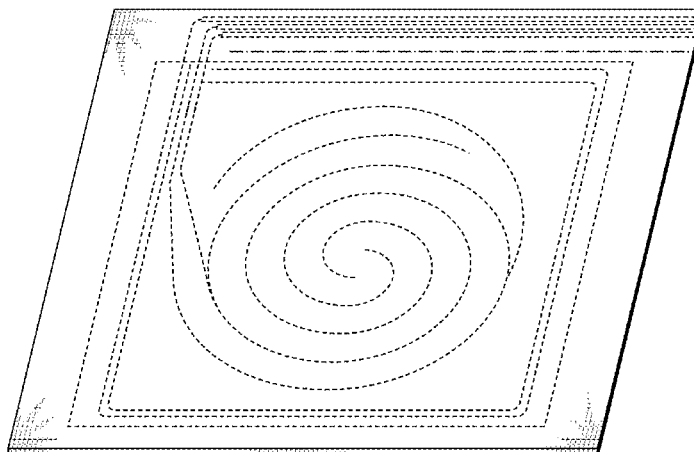

(56)

References Cited

U.S. PATENT DOCUMENTS

9,283,123	B2	3/2016	Lewis et al.
9,314,381	B2	4/2016	Curran et al.
9,322,797	B1	4/2016	Lastinger et al.
9,366,644	B1	6/2016	Lastinger et al.
9,506,886	B1	11/2016	Woodbury et al.
9,719,951	B1	8/2017	Woodbury et al.
2013/0053754	A1	2/2013	Heppe
2014/0244644	A1	8/2014	Mashinchi et al.

FOREIGN PATENT DOCUMENTS

CA	2685889	A1	11/2007
JP	61167854	A	7/1986
JP	4138155	A	5/1992
JP	2000329732	A	11/2000
JP	2005602	A	1/2005

* cited by examiner

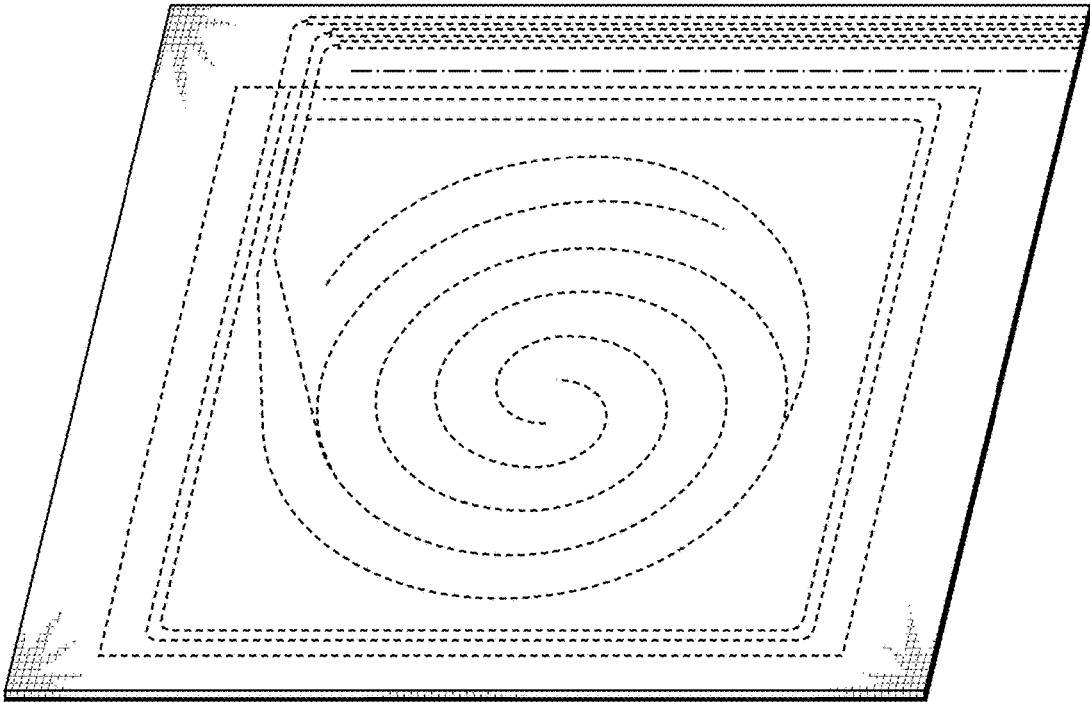


FIG. 1

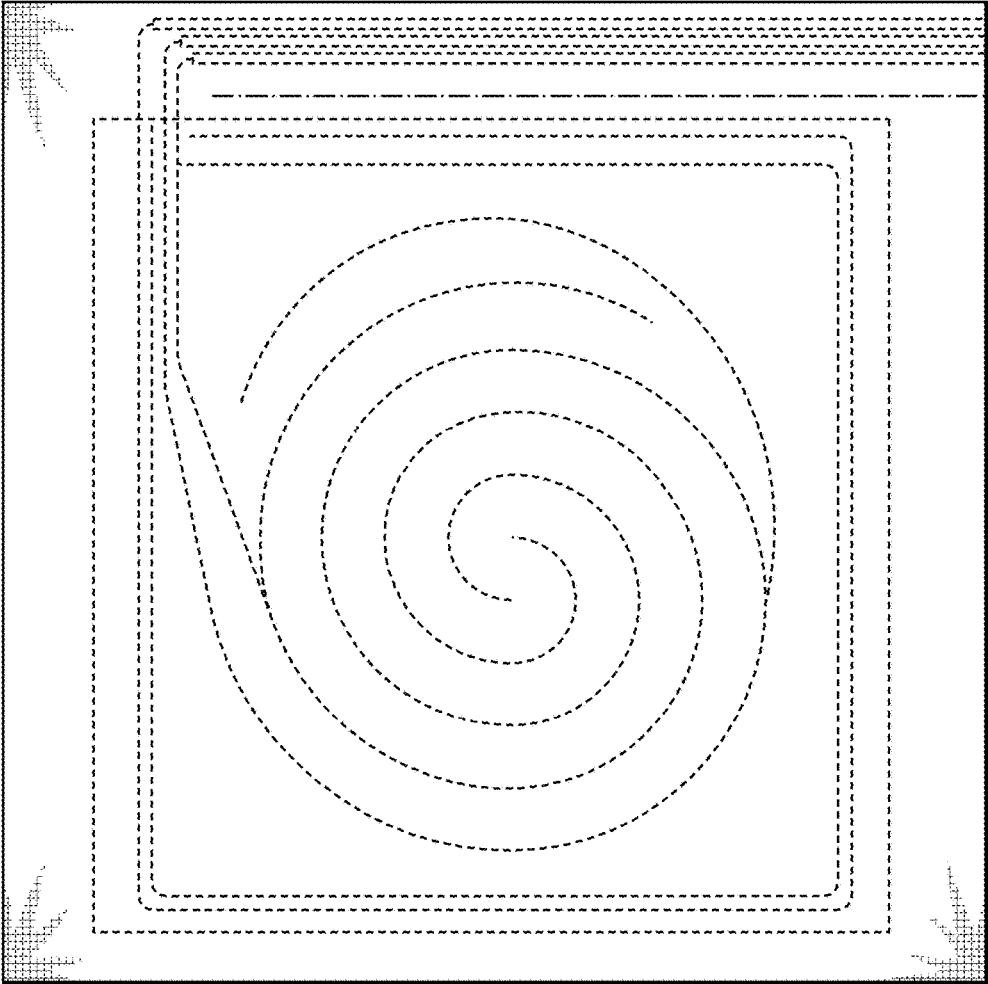


FIG. 2

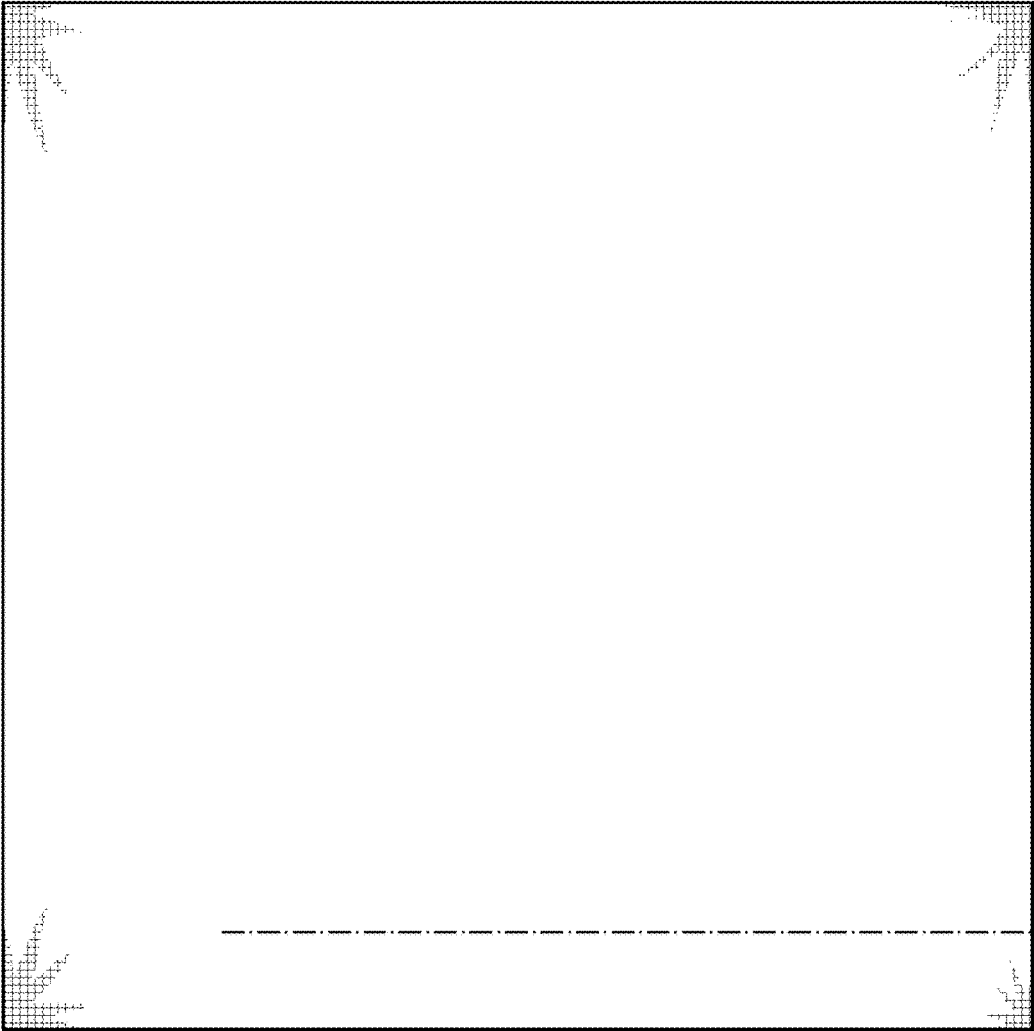


FIG. 3



FIG. 4



FIG. 5



FIG. 6



FIG. 7