



US 20060151060A1

(19) **United States**

(12) **Patent Application Publication**
Watkins

(10) **Pub. No.: US 2006/0151060 A1**

(43) **Pub. Date: Jul. 13, 2006**

(54) **REPLACEMENT VEHICLE FUEL INTAKE DEVICE**

filed on Feb. 24, 2003. Provisional application No. 60/457,537, filed on Mar. 25, 2003.

(75) Inventor: **Kirk W. Watkins**, Alpharetta, GA (US)

Publication Classification

Correspondence Address:
WOMBLE CARLYLE SANDRIDGE & RICE, PLLC
ATTN: PATENT DOCKETING 32ND FLOOR
P.O. BOX 7037
ATLANTA, GA 30357-0037 (US)

(51) **Int. Cl.**
B65B 1/04 (2006.01)
(52) **U.S. Cl.** **141/350; 220/86.2**

(57) **ABSTRACT**

(73) Assignee: **Paraphase, Inc.**

(21) Appl. No.: **11/344,739**


(22) Filed: **Feb. 1, 2006**

Related U.S. Application Data

(63) Continuation of application No. 10/634,019, filed on Aug. 4, 2003, which is a continuation-in-part of application No. 10/609,177, filed on Jun. 26, 2003, now Pat. No. 6,926,047.

(60) Provisional application No. 60/434,148, filed on Dec. 17, 2002. Provisional application No. 60/449,690,

A replacement fuel intake device is provided that is removably mountable within a base portion of a vehicle and contains a housing that is pivotal from a closed position to an open position. While in the closed position, the fuel intake passage to the fuel tank is sealed. While in the open position, the fuel intake passage is able to receive fuel from a fuel nozzle. The fuel intake device can be combined with a condensation capture apparatus that provides multiple coils in communication with a fume tube. The coils are cooled during fueling by the fuel passing around them from their placement inside the fuel intake pipe and act to condense fuel fumes into fuel for return to the fuel tank as the fumes rise toward the fume tube. The replacement fuel intake device can also include a pressurization and depressurization valve.

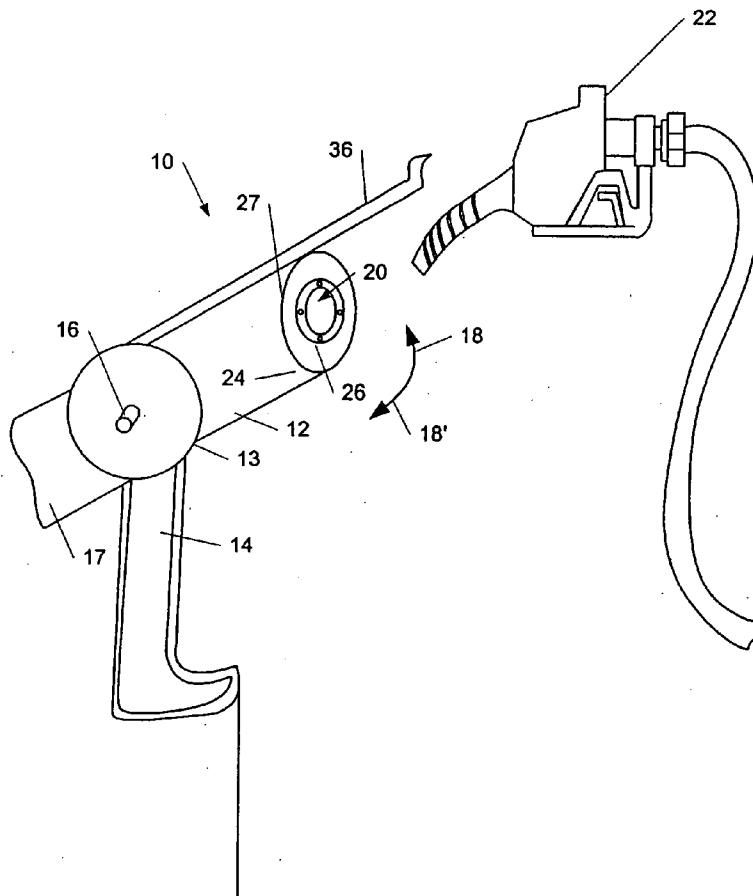

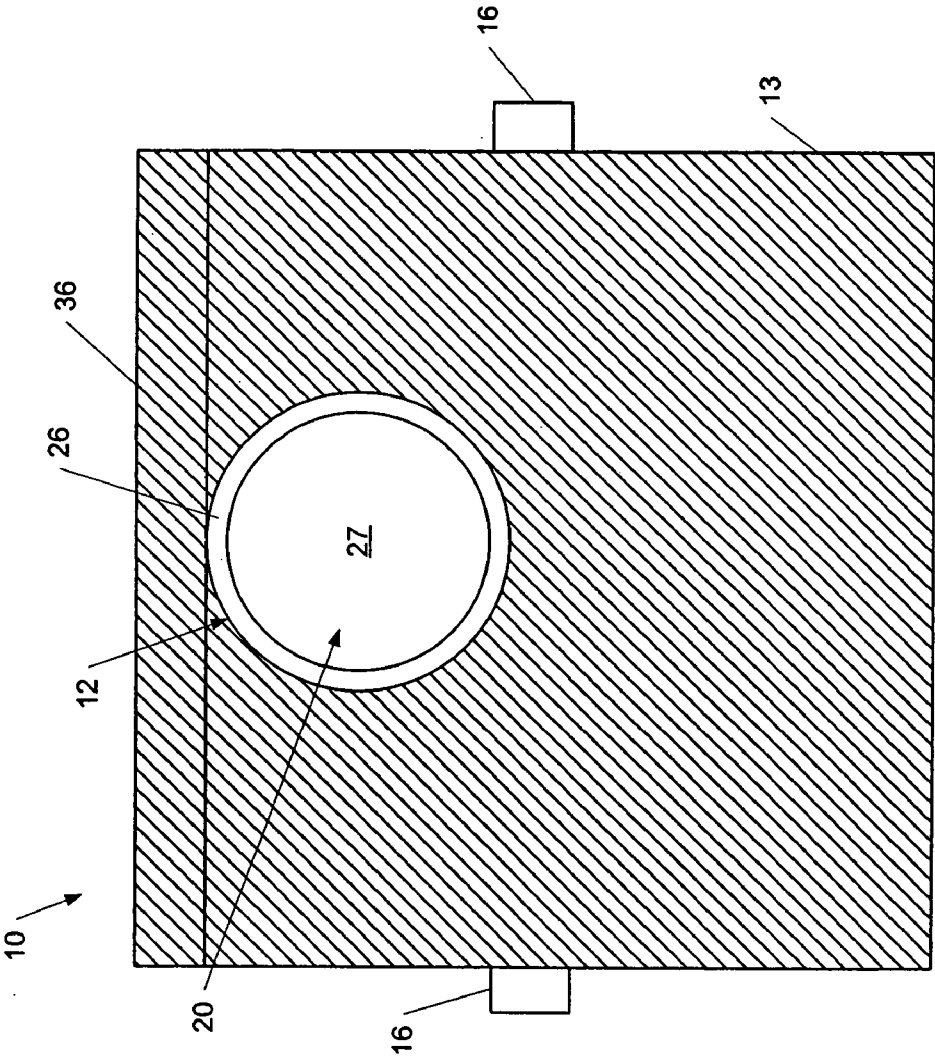


FIG. 1

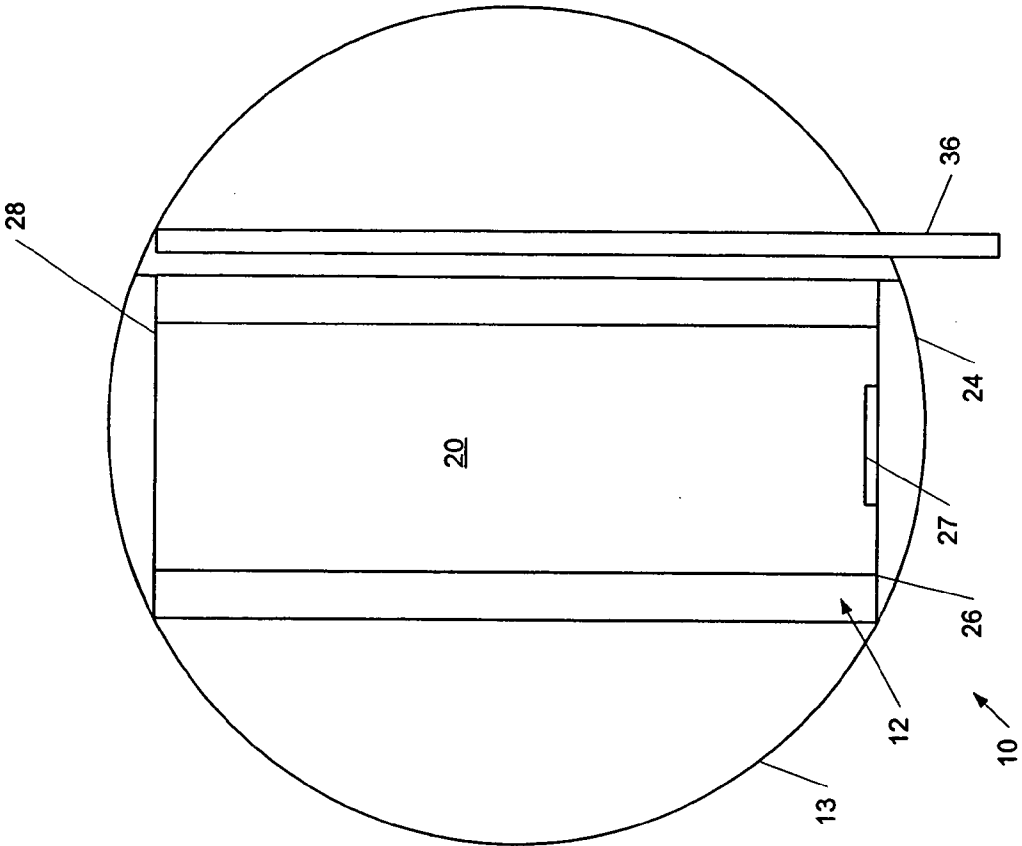


FIG. 2

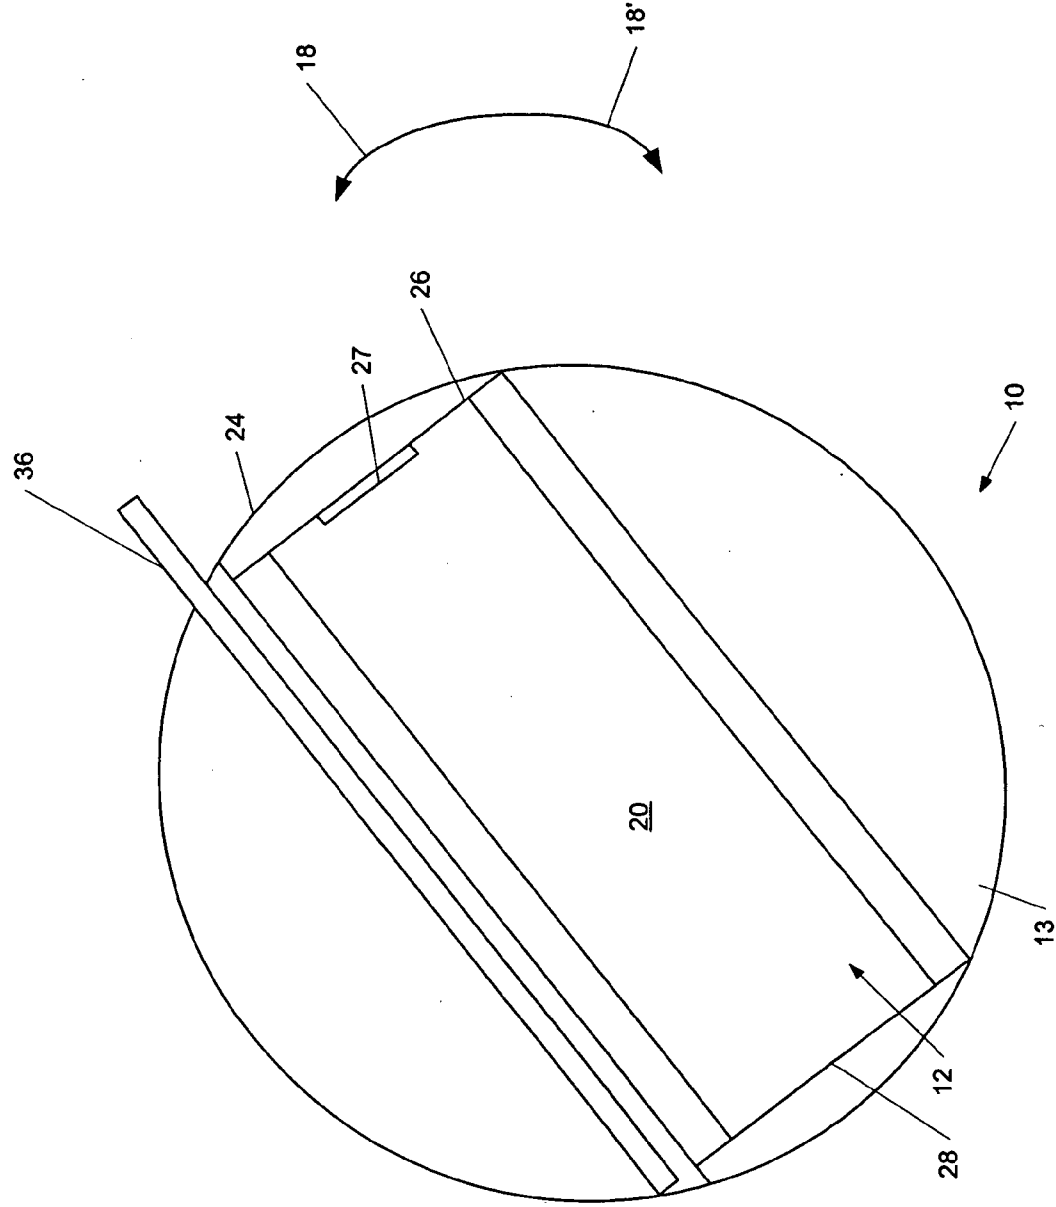
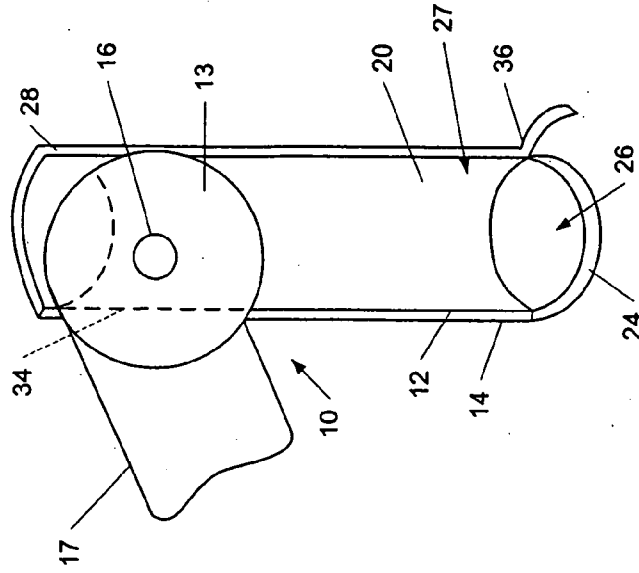
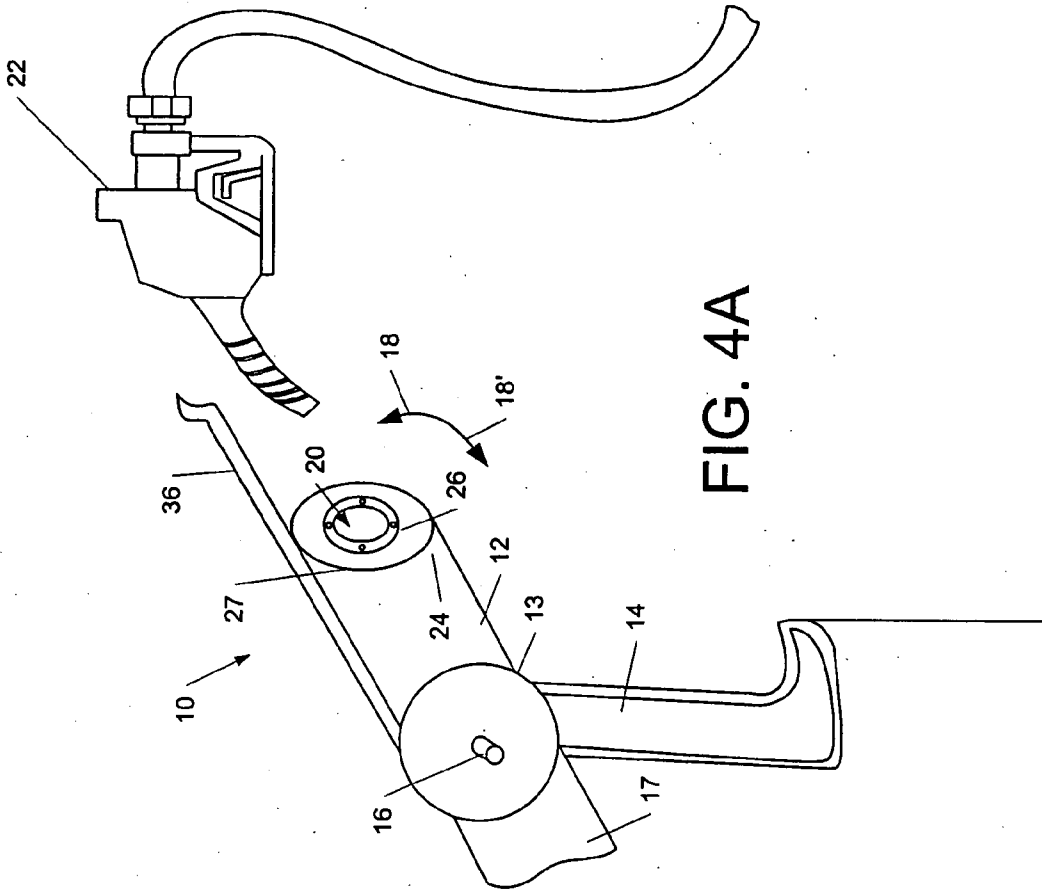


FIG. 3



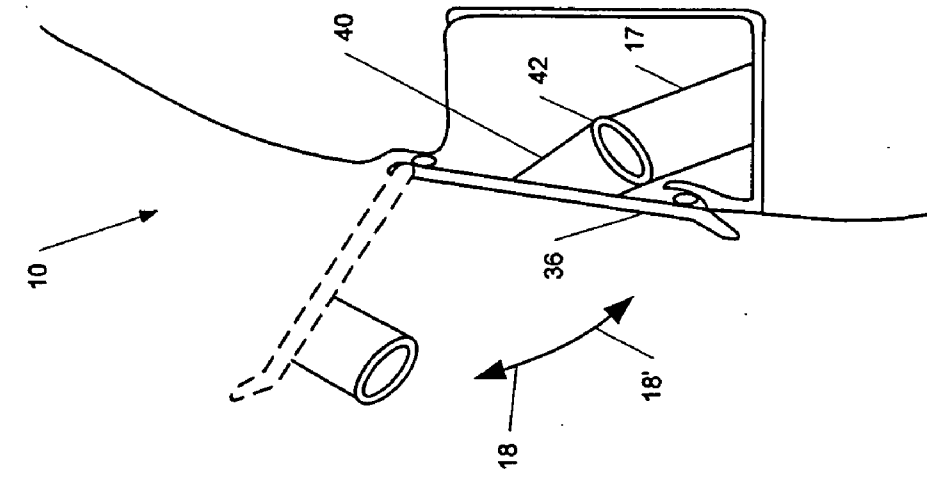


FIG. 5

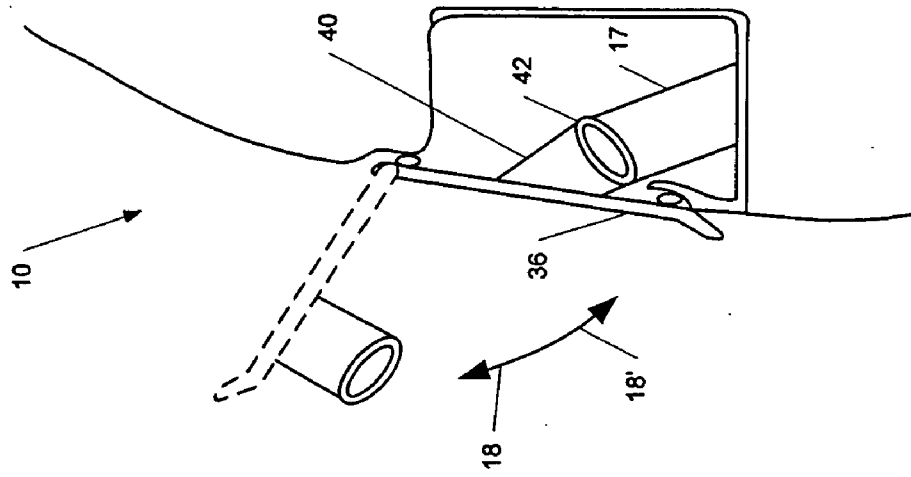


FIG. 6

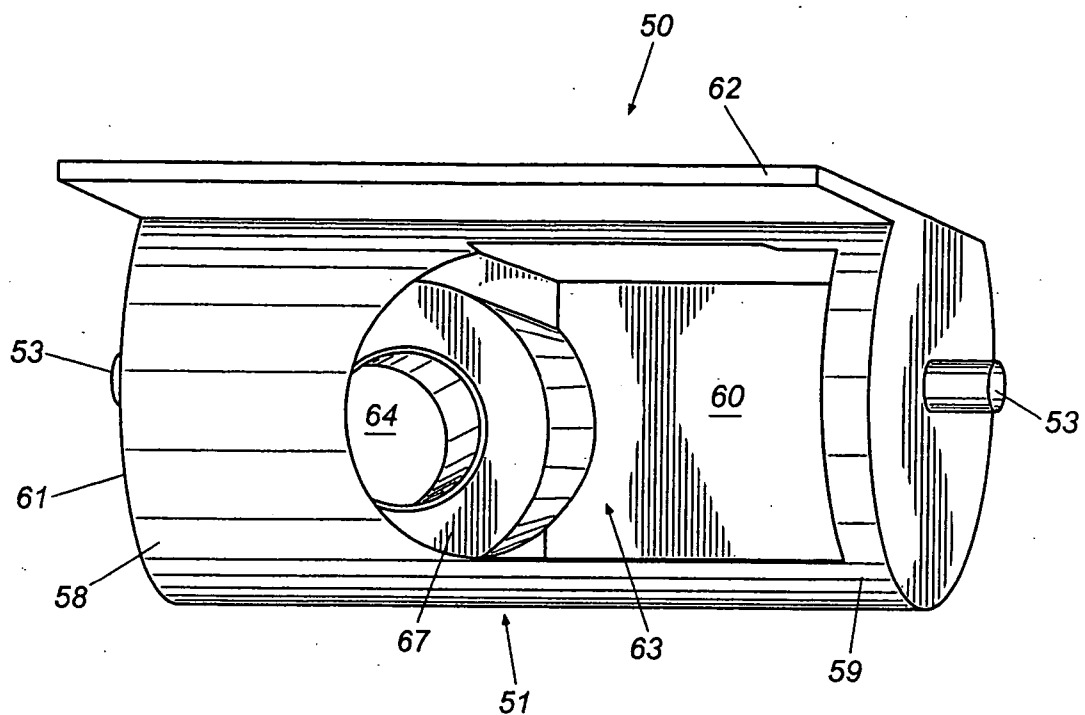


Fig. 7A

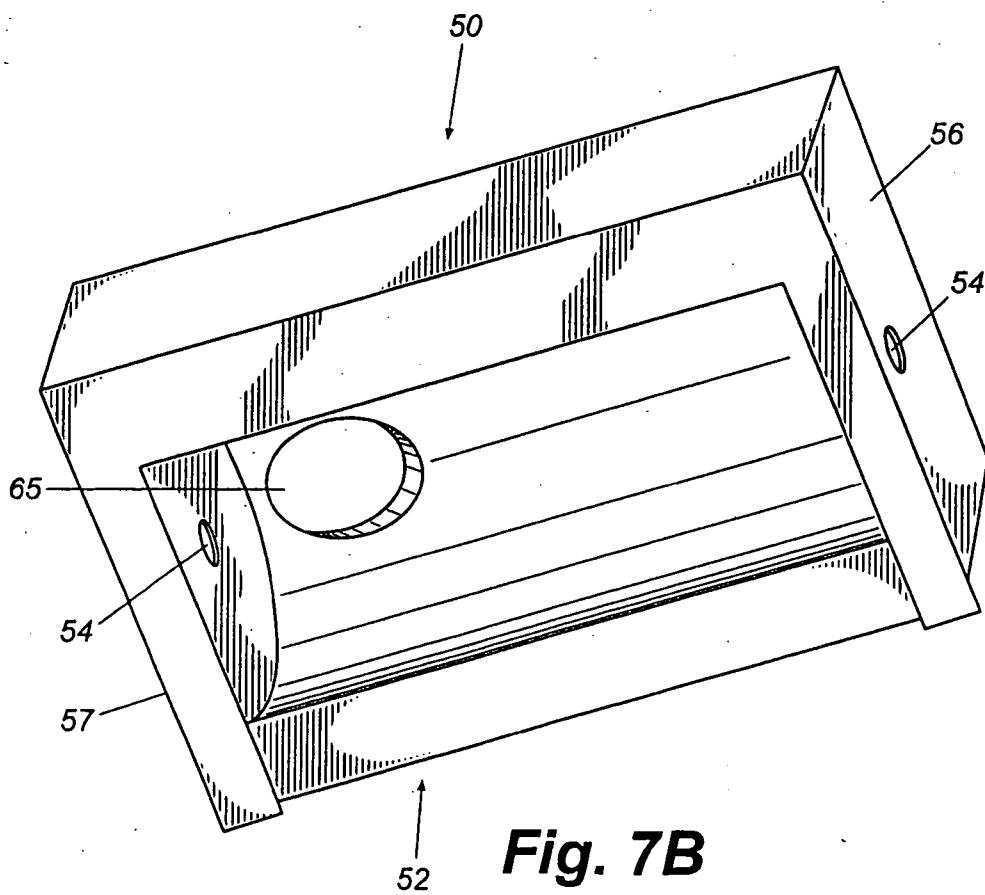


Fig. 7B

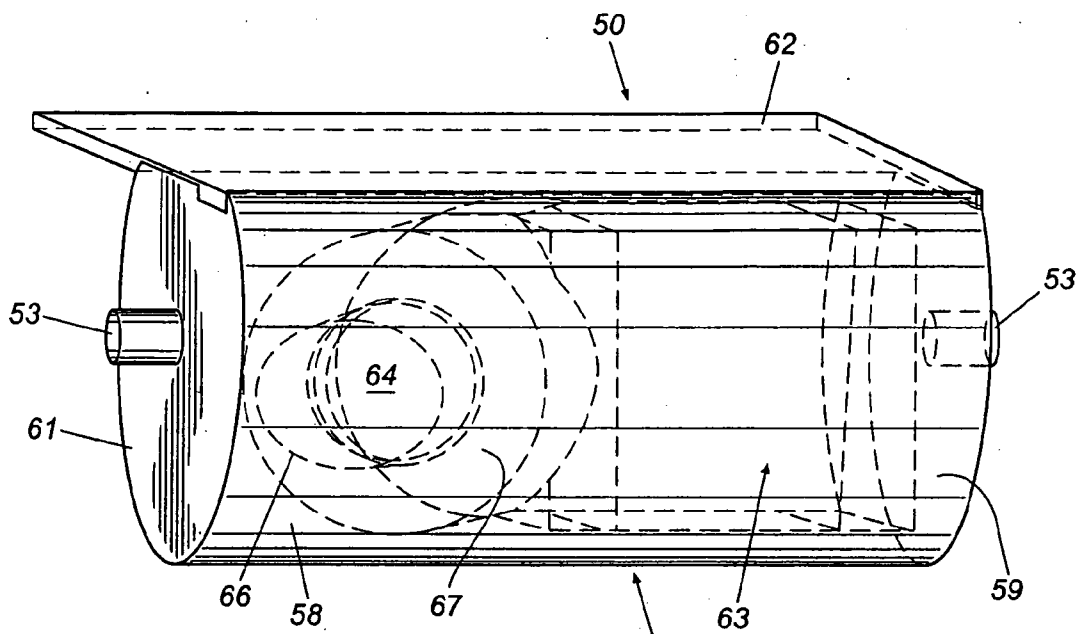


Fig. 8A

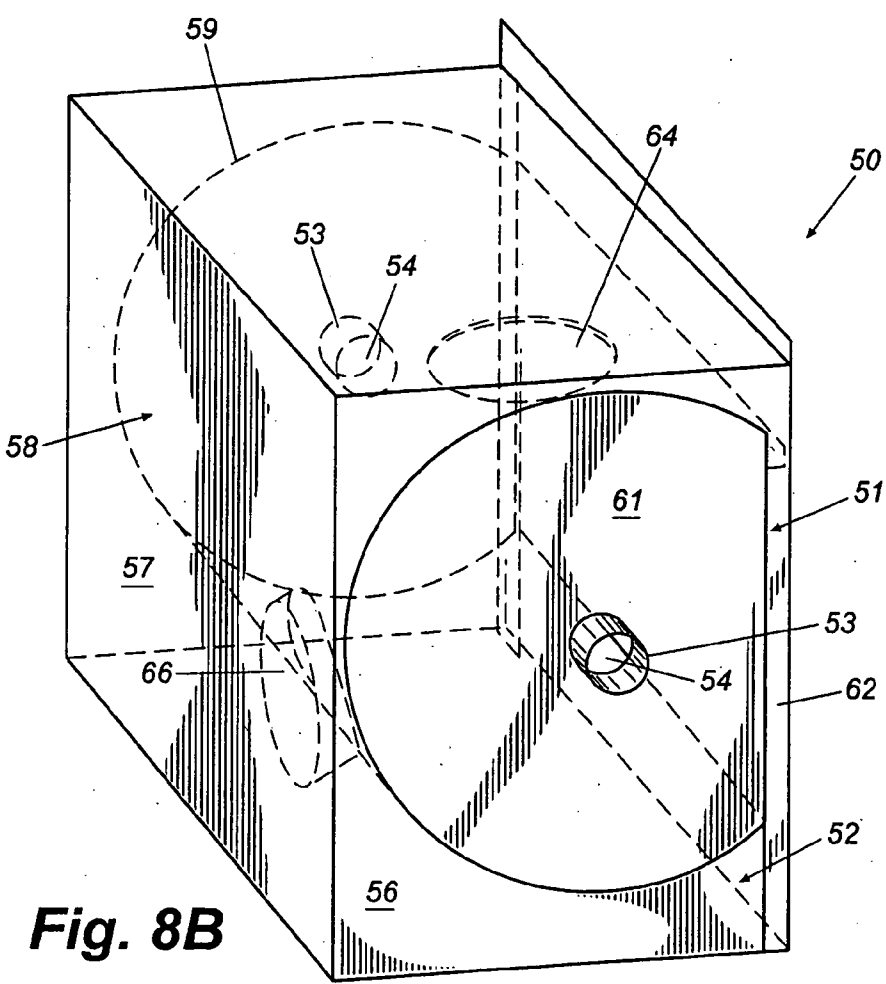


Fig. 8B

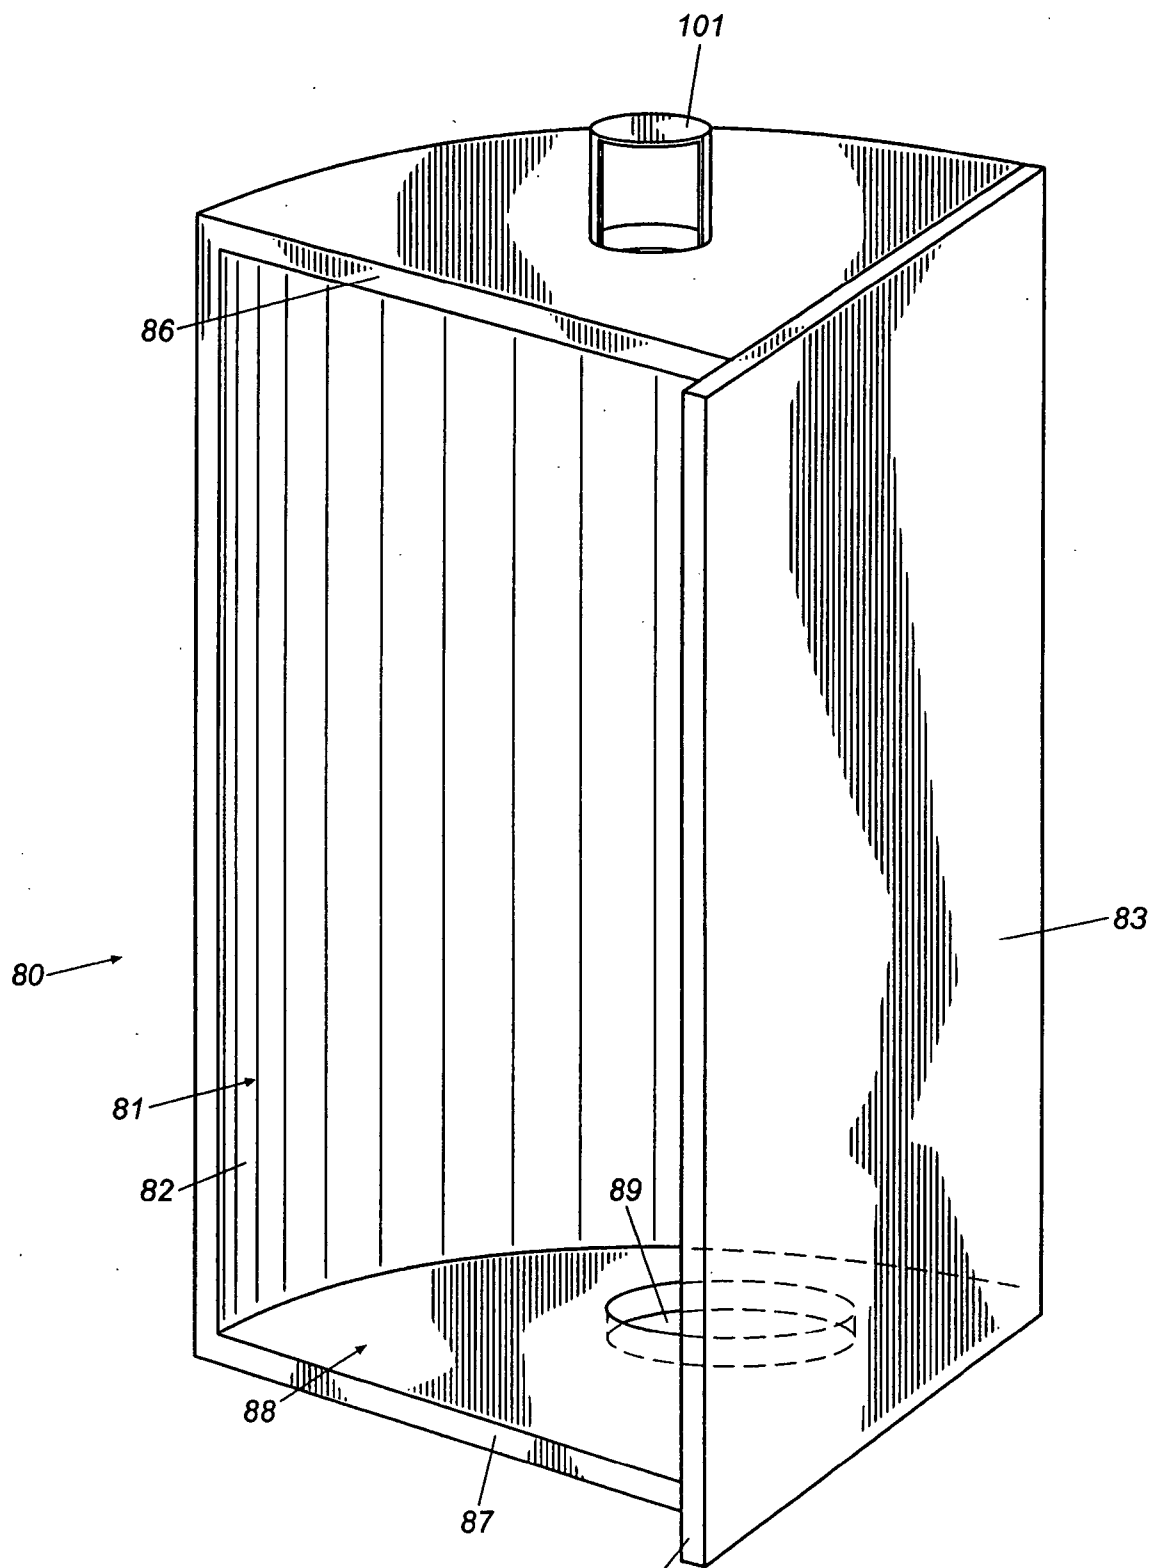


Fig. 9B

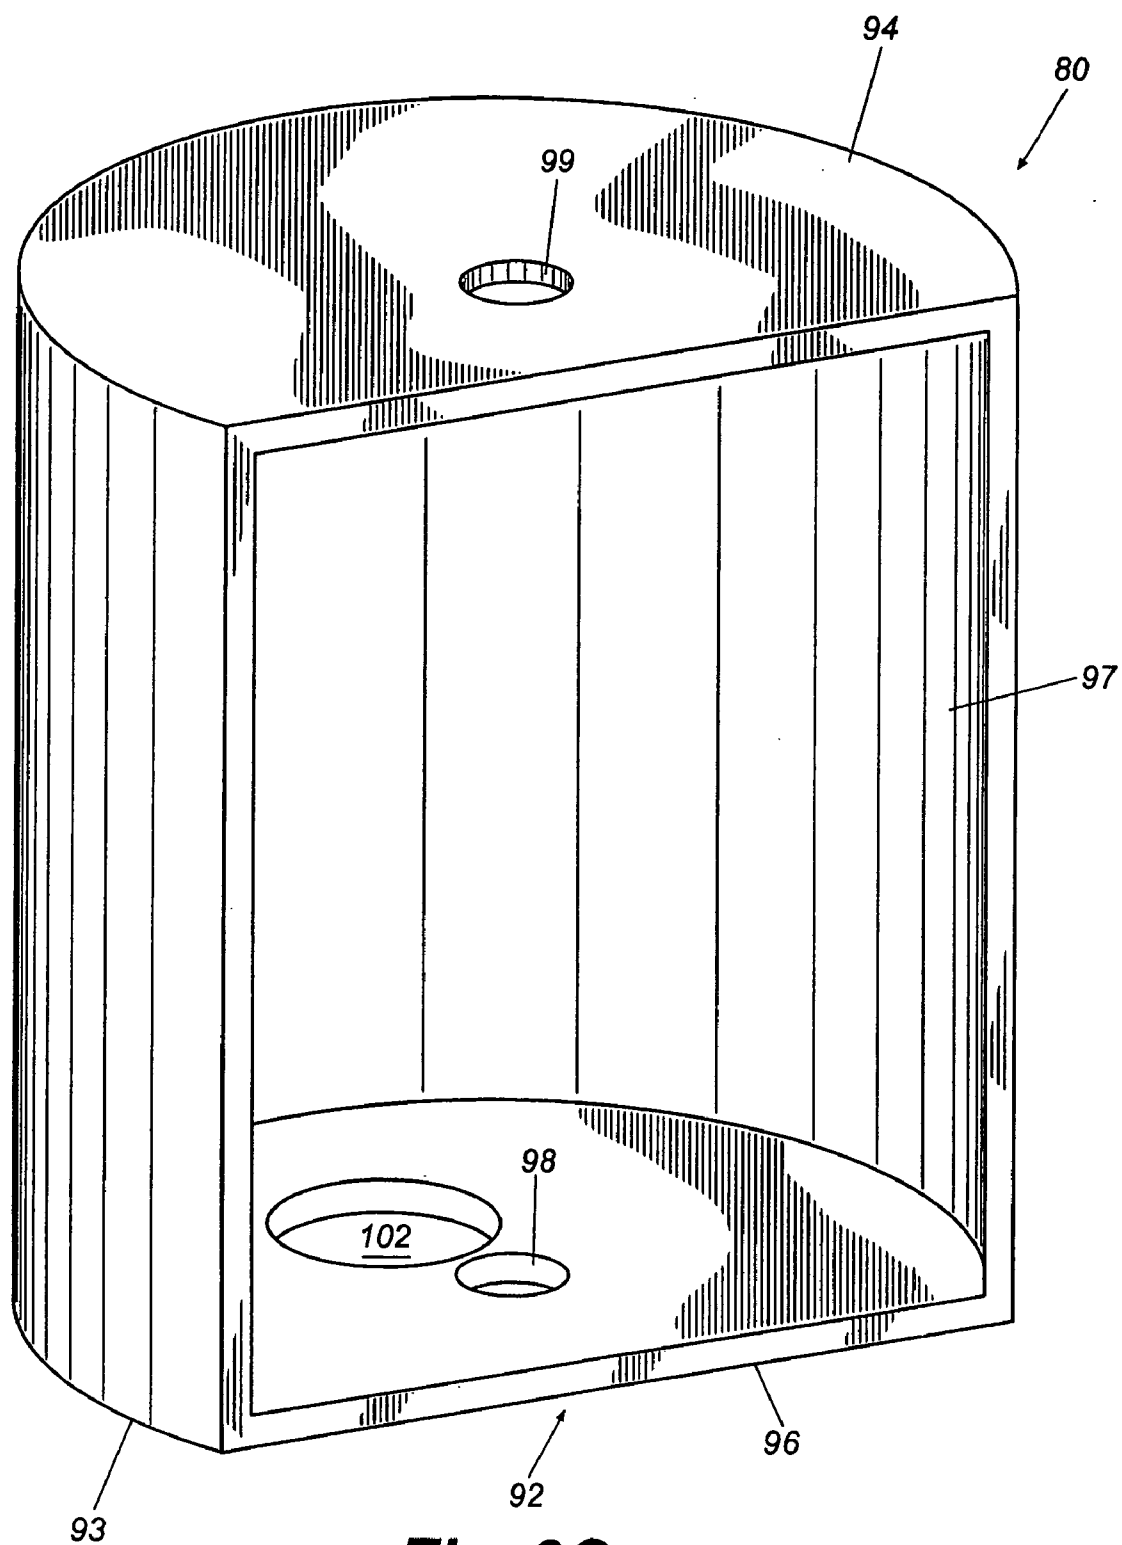


Fig. 9C

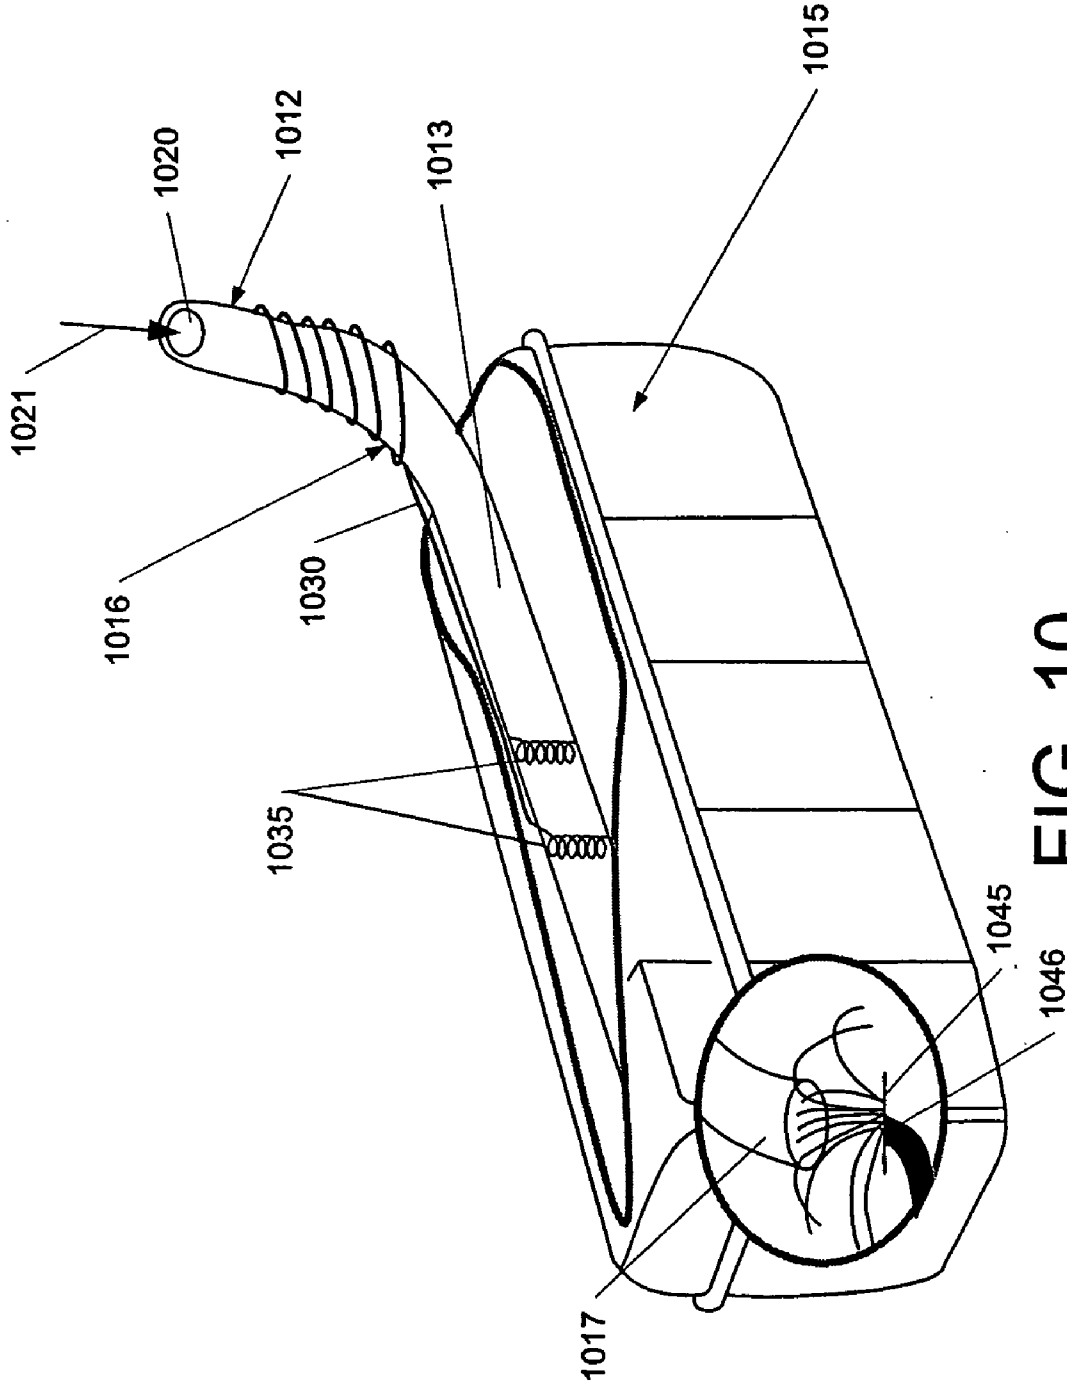


FIG. 10

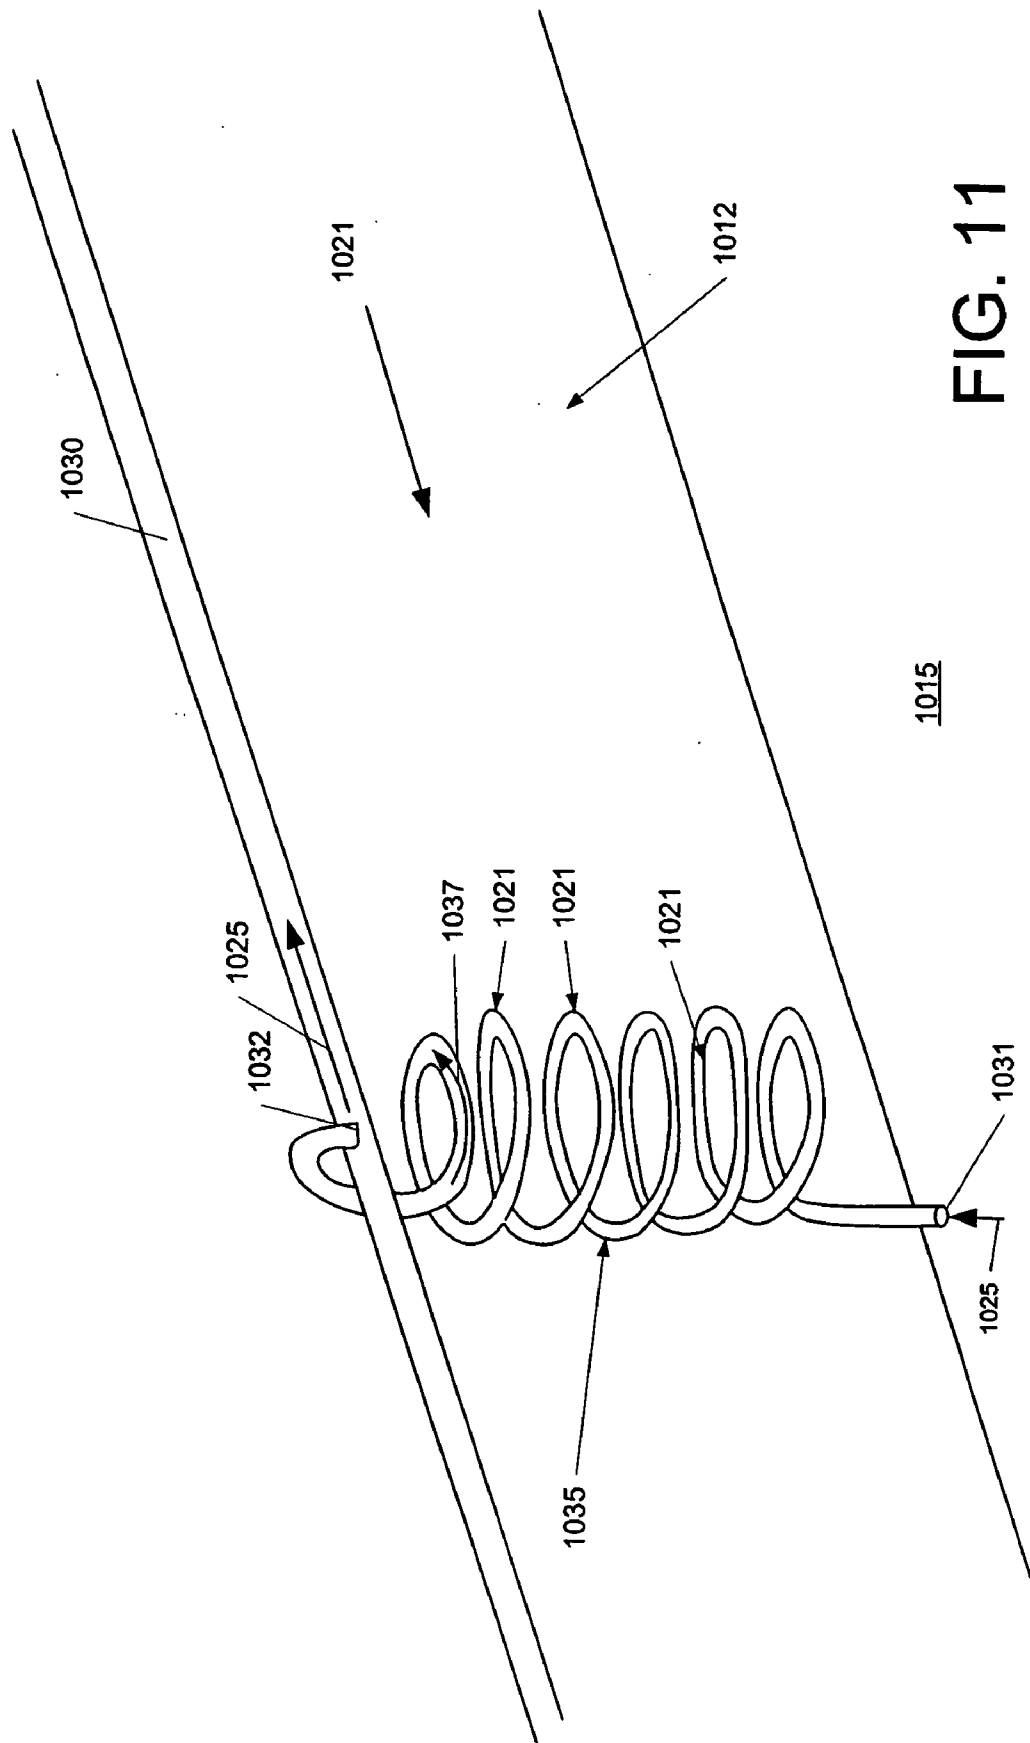


FIG. 11

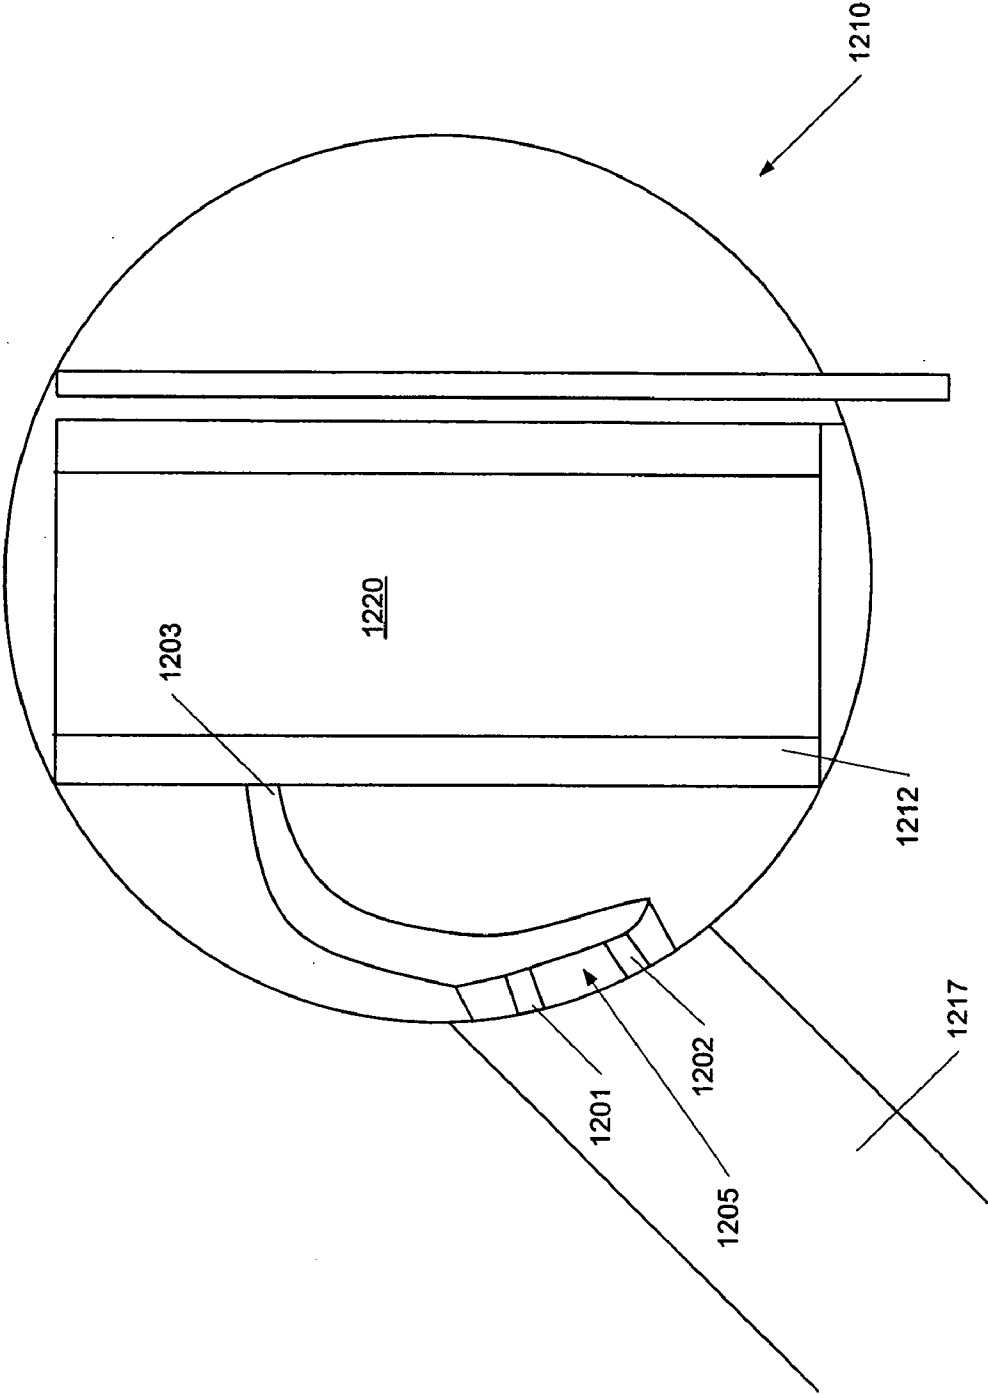


FIG. 12

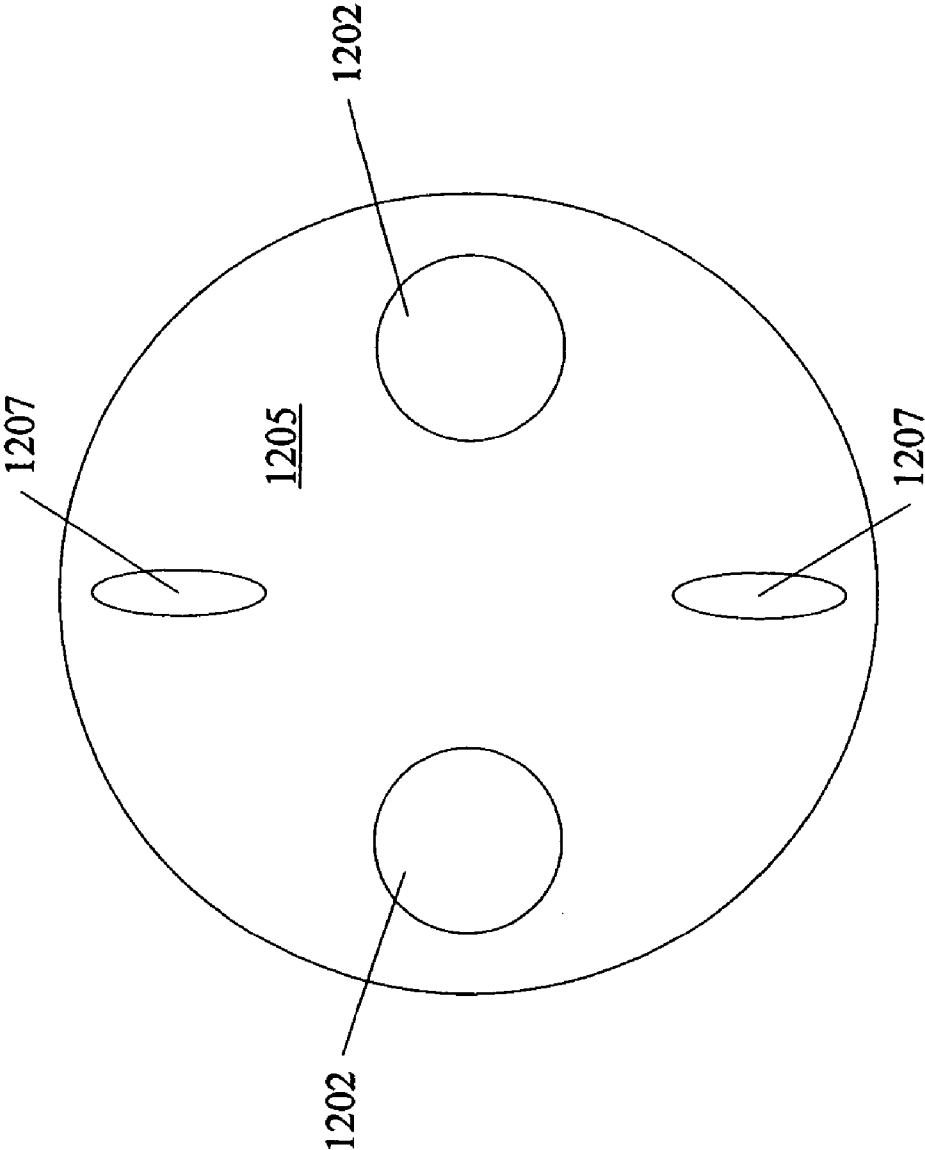


FIG. 13

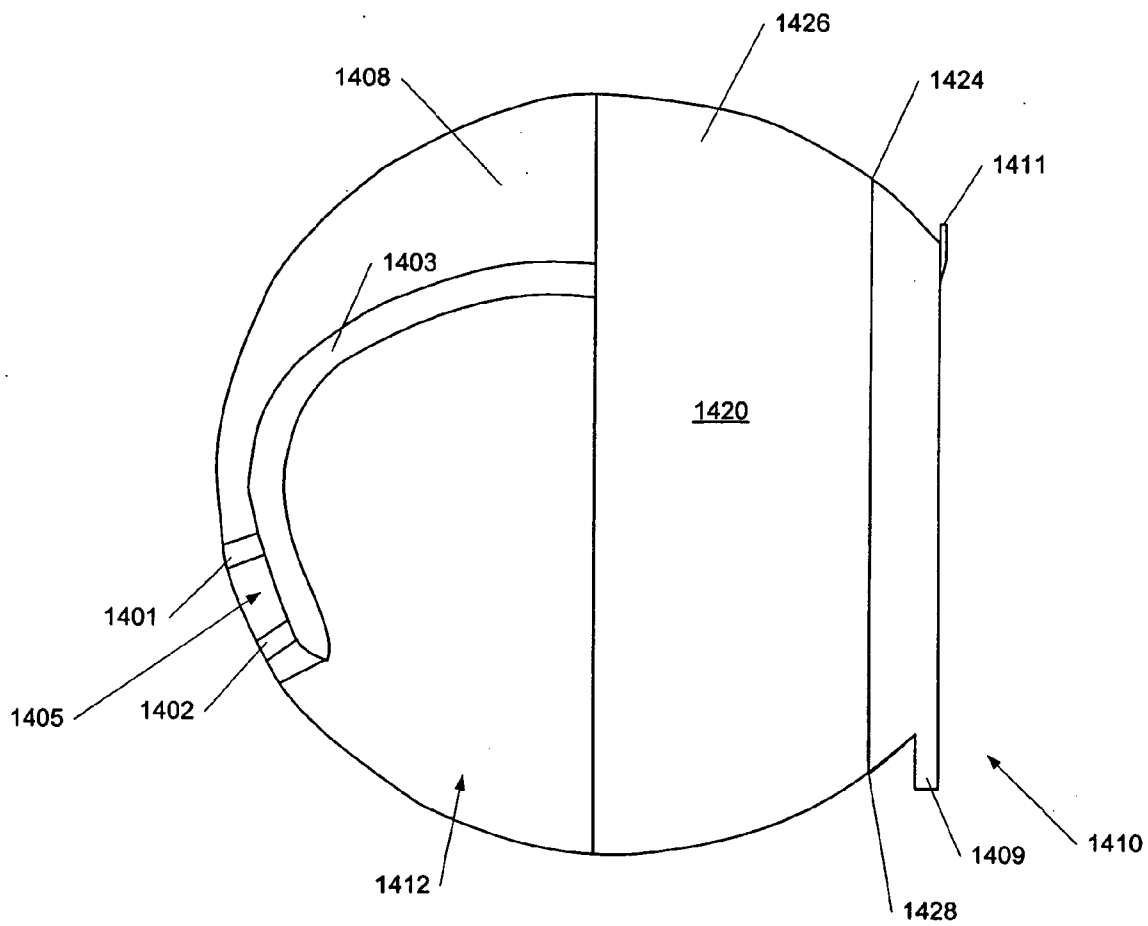


FIG. 14

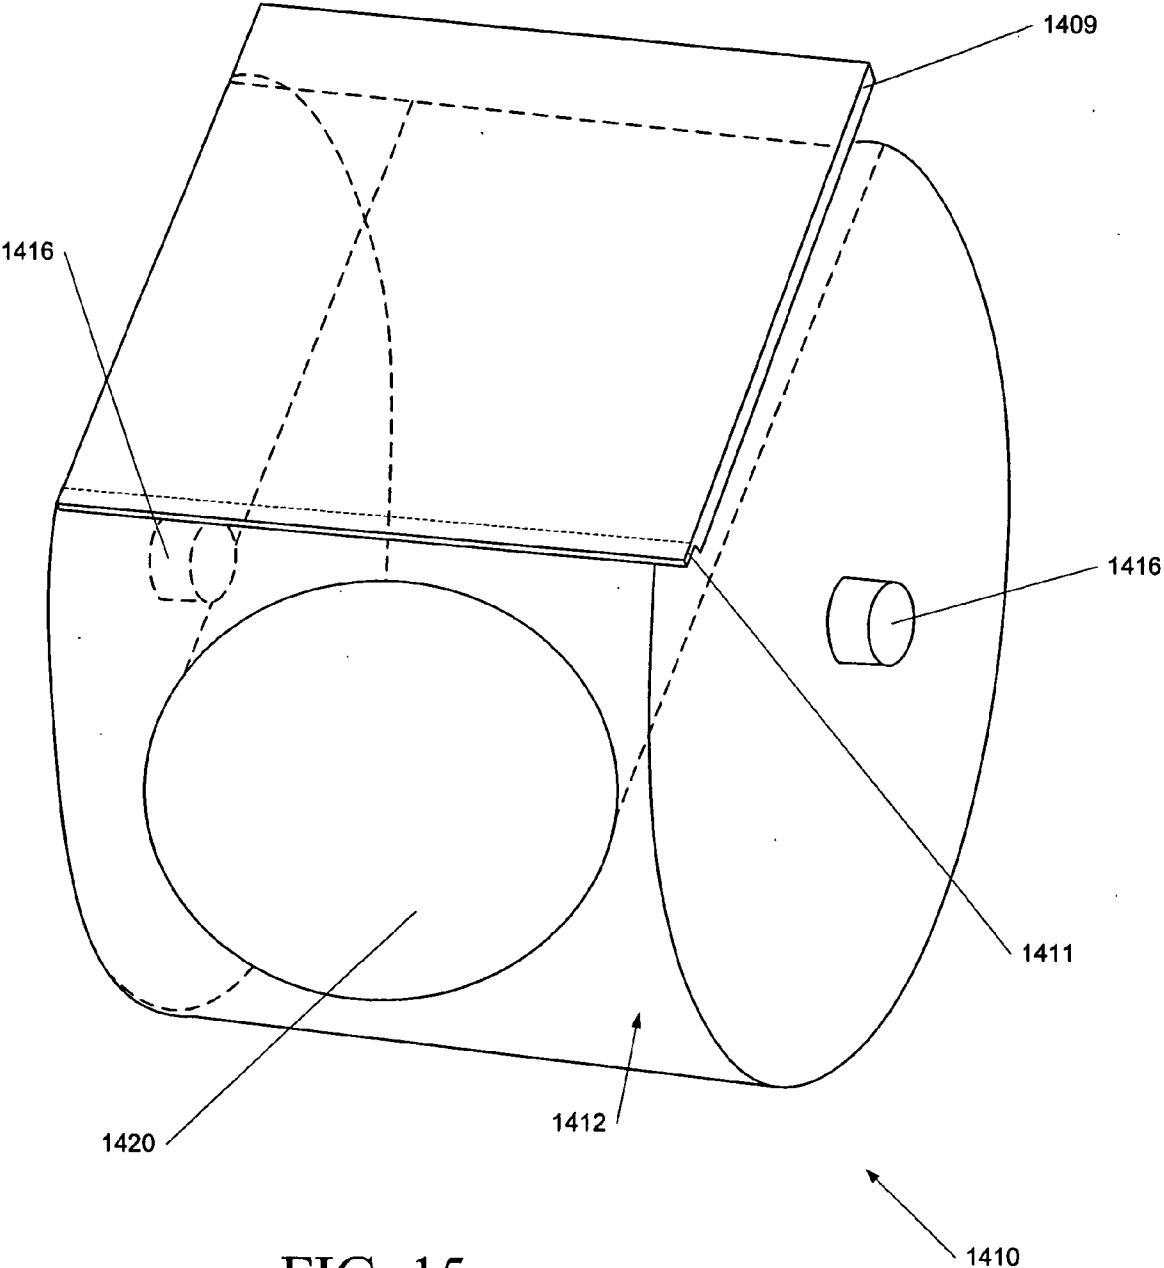


FIG. 15

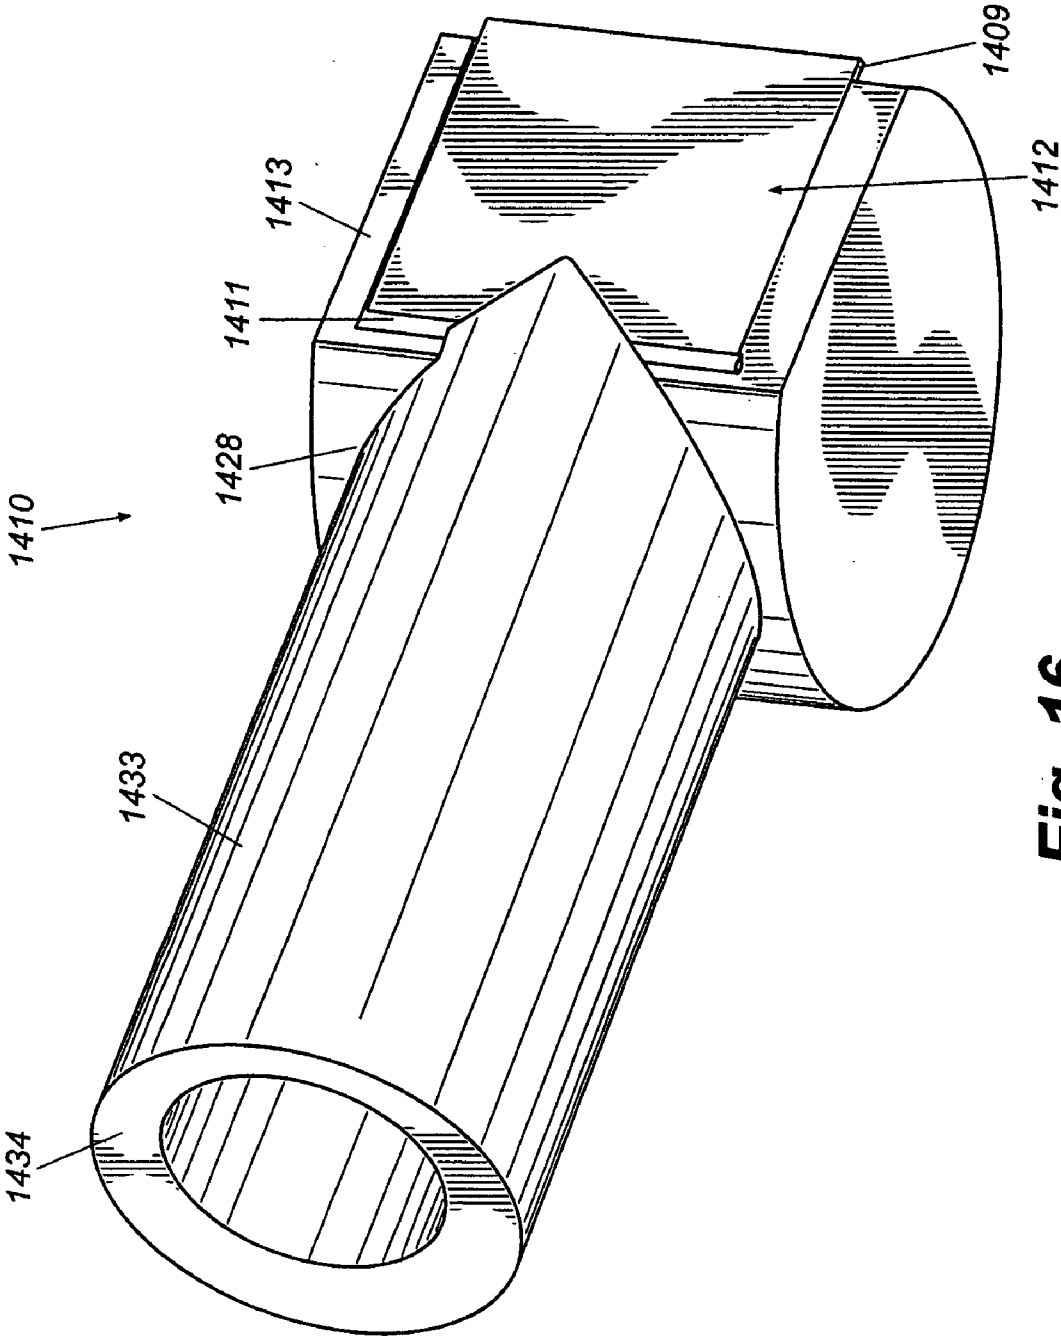


Fig. 16

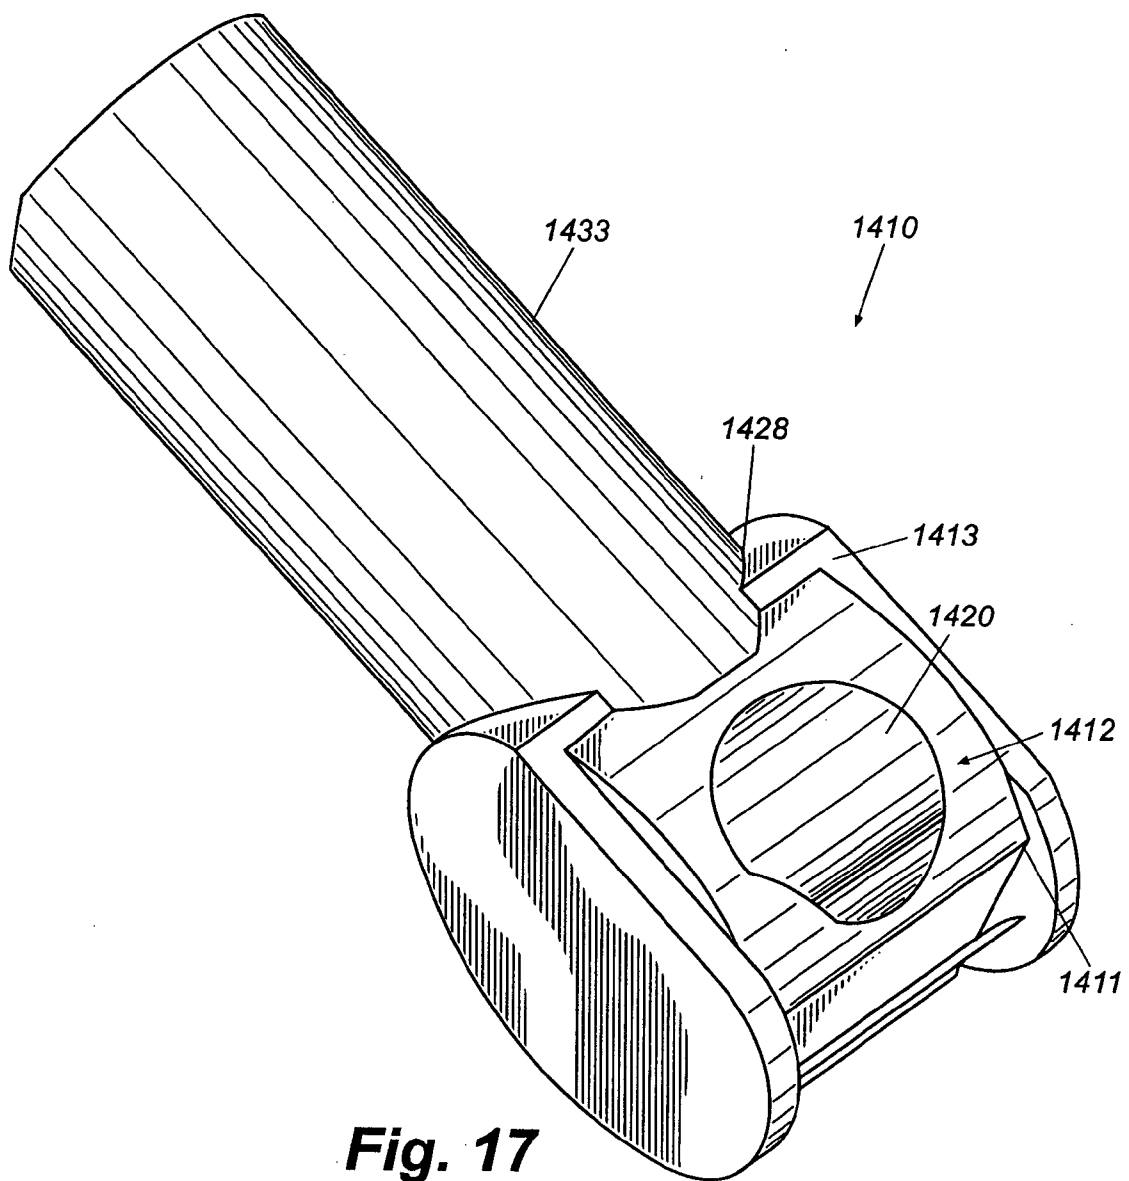


Fig. 17

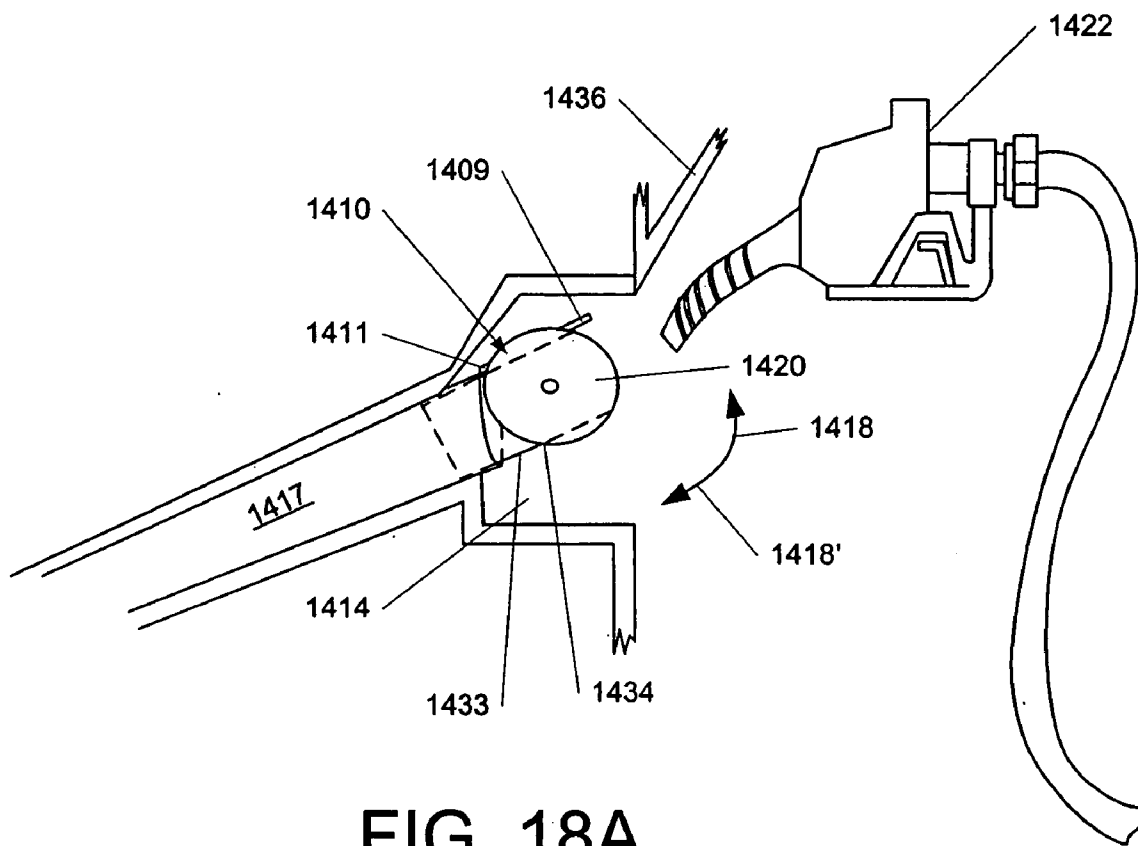


FIG. 18A

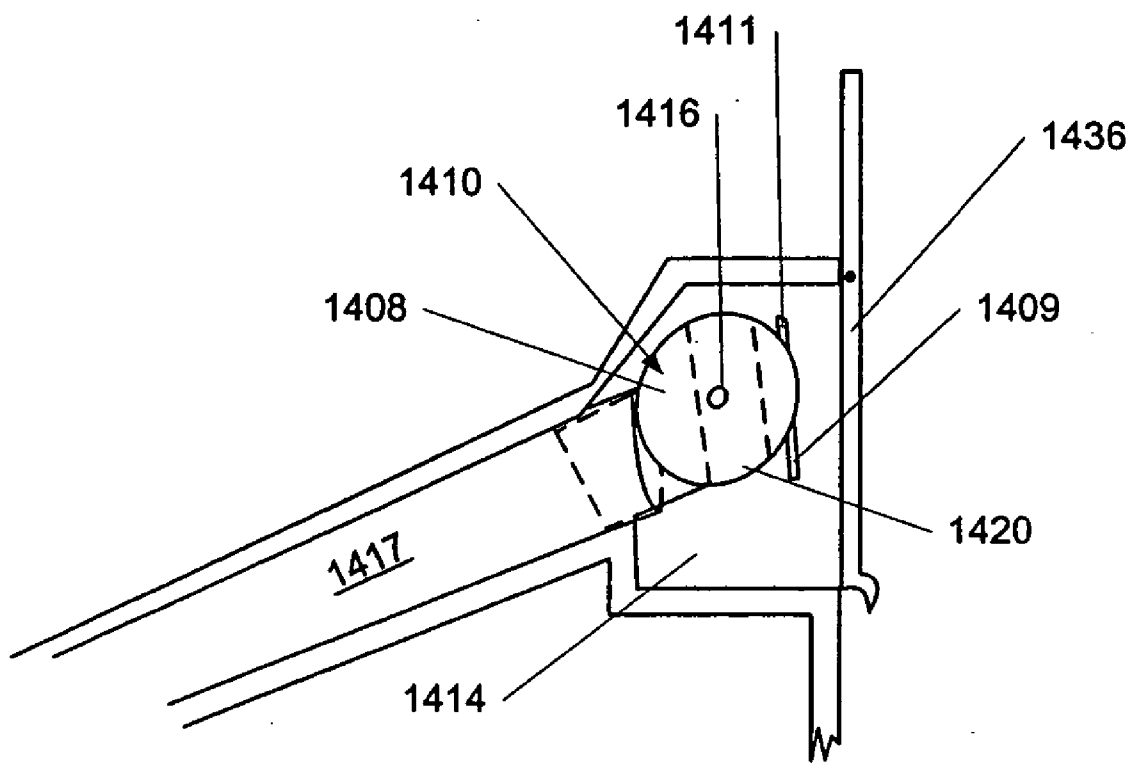


FIG. 18B

REPLACEMENT VEHICLE FUEL INTAKE DEVICE

CROSS REFERENCE TO RELATED APPLICATIONS

[0001] This application is a continuation of, and claims priority to, U.S. patent application Ser. No. 10/634,019, filed Aug. 4, 2003, which is a continuation-in-part of, and claims priority to, U.S. patent application Ser. No. 10/609,177, filed Jun. 26, 2003, which claims priority to U.S. Provisional Application No. 60/434,148, filed Dec. 17, 2002, U.S. Provisional Application No. 60/449,690, filed Feb. 24, 2003, and U.S. Provisional Application No. 60/457,537, filed Mar. 25, 2003; all of which are incorporated herein by reference.

FIELD OF THE INVENTION

[0002] The present invention generally relates to automotive accessories, and more particularly to a replacement vehicle fuel intake device for opening and closing a fuel intake passage for a vehicle that eliminates the need for a removable gas cap.

BACKGROUND OF THE INVENTION

[0003] Typically, to pump gas into most cars, boats or other vehicles, the operator generally must remove a locking seal cap covering a fuel intake passage to open the intake passage for entry of a fuel nozzle therein. The opening of the gas intake pipe cover and the subsequent removal of the fuel cap is a two-step process that is not as convenient or as efficient as merely opening the cover and inserting the gasoline hose. Often, especially with many older cars, the operator must either hold on to the cap or lay it down on top of the car or somewhere else close to the vehicle while they pump the gas. A problem with this is that often times after pumping the gas, especially in inclement weather, the operator will forget to retrieve and replace the cap over the gas intake, often simply driving off and leaving the cap or having it roll away to become lost or destroyed. As a result, the gas intake for the car is left unsealed, enabling release of gasoline vapors and potential introduction of contaminants into the fuel tank, and the owner/operator must go to either the dealership or a specialty automotive store to find a gas cap of the particular size and configuration required for his or her vehicle.

[0004] More recently, vehicle gas caps have begun to be equipped with a tether or strap, which allows the caps to simply hang or swing down below the fuel intake. The edges of the caps, however, can scratch the vehicle finish when allowed to drop or swing down, and if the straps become broken, the caps still can be lost. Another problem is that over time the fuel caps typically become covered with grease, fuel, dirt and dust and thus become somewhat messy and unsanitary to remove.

[0005] Additionally, on average, there are over 16,000,000 vehicles sold in the United States every year and over 200,000,000 total vehicles on the road. Over the course of a year, it has been estimated that vehicles lose as much as 150,000,000 gallons of fuel a year because of a damaged or missing fuel cap. It is further estimated that upwards of over 200,000,000 gallons of fuel are lost every year through the forcing out of fumes of fuel that are in the fuel tank during the filling of the tank. These fumes are forced out of the fuel

tank because the tank is a closed system that exchanges the fuel tank fumes with fuel during filling and draws those replaced fumes out of the tank into the recapture system of the fueling station. These escaping fumes are both a safety and environmental hazard. Fueling stations have been the site of numerous explosions caused by escaping fumes from fuel tanks. Additionally, the fumes aspirate the air and create environmental hazards in the air for humans, plants, and animals.

[0006] It can therefore be seen that a need exists for an automobile fuel intake device that addresses these and other related and unrelated problems in the art.

SUMMARY OF THE INVENTION

[0007] A fuel intake device is provided that presents a pivotally mounted body moveable between an open position and a closed position. When the fuel intake device is in the open position, an intake opening is provided that communicates with a fuel intake passage of the vehicle. When the fuel intake device is in its closed position, the fuel intake passage is sealed to prevent access or escape therefrom of the fuel. In the closed position, a pressurization/depressurization valve can be positioned over the fuel intake passage (as either a fixed or removable part of the device). A locking system can also be provided to provide additional security for the fuel intake device while in the closed position. The locking system could include a lock for the outer cover and/or for the fuel intake device. The fuel intake device lock/locks could restrict the device from untwisting and from flipping to the open position.

[0008] A system and method for recovering escaping fumes from the fuel tank of a vehicle is also provided. This system and method works either in coordination with the fuel intake device as described herein or can be mounted within a traditional fuel tank to condense the fumes into fuel to be retained and used in the vehicle. The condensation system generally includes multiple coils in communication with a fume tube aligned along the fuel intake pipe. The coils have intake holes at their base that receive fumes rising to the top of the fuel tank. The coils spiral through the fuel intake pipe and dispense any fumes that are not condensed during travel through the coils into the fume tube. The fume tube can be in communication with the fuel intake device described above to discharge the fumes into the receiving jacket of the fuel nozzle provided for receipt of such fumes. In addition, the coils are cooled during a fueling operation by the passage of the liquid fuel through the fuel intake pipe about which the coils are extended and act to condense the fumes into liquid, condensed fuel as the fumes rise upwardly through the intake pipe toward the fume tube. The condensed fuel will then drain down the coils into the fuel tank to be used by the vehicle. Alternatively, or in addition to the cooling from the fuel flow, the coils can be cooled by connection to the air conditioning unit of the vehicle or by some other method.

[0009] A replacement fuel intake device is also provided that presents a body portion that contains a pivotal housing moveable between an open and a closed position. The replacement fuel intake device can be inserted into the fuel intake pipe of the vehicle through a pipe fitting extension of the body portion. The pipe fitting extension can be threaded or force fit into or onto the fuel intake pipe to receive a fuel flow from a fuel nozzle into the tank of the vehicle.

BRIEF DESCRIPTION OF THE DRAWINGS

[0010] **FIG. 1** is a top plan view of a vehicle intake device of the present invention.

[0011] **FIG. 2** is a cross-sectional view of the vehicle fuel intake device in a closed position.

[0012] **FIG. 3** is a cross-sectional view of the fuel intake device rotated to an open position.

[0013] **FIG. 4A** is a perspective illustration schematically illustrating an alternative design of the fuel intake device in an open position for receiving a fuel nozzle of a gas pump.

[0014] **FIG. 4B** is a side view schematically illustrating the fuel intake device of **FIG. 4A** in a closed position with a valve between the vehicle fuel intake passage being closed.

[0015] **FIG. 5** is a side view illustrating an additional embodiment of the vehicle fuel intake device of the present invention.

[0016] **FIG. 6** is a side elevational view of another alternative design of the vehicle fuel intake device.

[0017] **FIGS. 7A-7B** are perspective views of still a further embodiment of the vehicle fuel intake device of the present invention.

[0018] **FIGS. 8A and 8B** are perspective views of the embodiment of the vehicle fuel intake device of **FIGS. 7A-7B**, illustrated schematically with parts broken away.

[0019] **FIGS. 9A-9C** are perspective illustrations of a further alternative embodiment of the vehicle fuel intake device.

[0020] **FIG. 10** is a side view of a fuel tank with the coil condensation system.

[0021] **FIG. 11** is a schematic illustration of a coil of **FIG. 10**.

[0022] **FIG. 12** is a cross-sectional view of the vehicle fuel intake device in the closed position and with pressurization and depressurization valves in a removable cap.

[0023] **FIG. 13** is a detailed view of the removable cap with the valves of **FIG. 12**.

[0024] **FIGS. 14-16** show various views of an intake pipe for an additional embodiment of the vehicle fuel intake device.

[0025] **FIG. 17** is a detailed view of the intake pipe of **FIGS. 14-16** in a hollow chamber of a cylinder shell.

[0026] **FIG. 18A** is a perspective illustration schematically illustrating an alternative design of the fuel intake device in an open position for receiving a fuel nozzle of a gas pump.

[0027] **FIG. 18B** is a side view schematically illustrating the fuel intake device of **FIG. 18A** in a closed position.

DESCRIPTION OF THE INVENTION

[0028] The present invention generally comprises a fuel intake device **10** for a fuel intake system of a vehicle such as an automobile, boat, etc. As shown in the attached drawings, **FIG. 1-4B**, the fuel intake device **10** generally includes a cylindrical or tubular intake body or pipe **12**, generally formed from a metal material such as aluminum or

other types of corrosion resistant material such as various synthetics or plastic materials. As shown in **FIGS. 1-3**, the pipe **12** generally is cylindrical, although other shapes and configurations also can be used, and typically is mounted within a larger cylindrical base portion **13** that will be pivotally mounted within a recess or well **14** (**FIGS. 1 and 4A**) of a vehicle, by a pivot pin or rod **16**. Alternatively, as shown in **FIGS. 4A and 4B**, the base **13** can be of a reduced size sufficient to support the intake pipe **12** so as to define a valve between the intake pipe **12** and a vehicle fuel inlet pipe **17**. As a result, the intake pipe **12** of the fuel intake device **10** is enabled to pivot from a closed position, as shown in **FIGS. 2 and 4B**, to an open position as illustrated in **FIGS. 1, 3 and 4A**, by being rotated in the direction of arrows **18** and **18'** (**FIGS. 3 and 4A**).

[0029] As indicated in **FIGS. 1-4B**, the intake pipe or body **12** of the fuel intake device **10** defines an intake or flow passage **20**, through which fuel can be pumped from a fuel pump nozzle **22**, as indicated in **FIG. 4A**. In addition, the intake pipe **12** generally includes a forward or proximal end **24** having an intake opening **26** that generally includes a biased closure element **27** (**FIGS. 3 and 4A**) as is commonly included with the fuel intakes for most vehicles. The intake pipe further includes a distal end **28** (**FIG. 4B**) that communicates with a proximal end **34** of the fuel inlet pipe **17** of the vehicle so as to define a reclosable valve between the proximal and distal ends of the intake pipe **12** and vehicle fuel inlet pipe **17**, respectively.

[0030] When the intake pipe **12** of the fuel intake device **10** is pivoted in the direction of arrow **18** to its open position shown in **FIGS. 3 and 4A**, the internal valve **15** within the cylindrical base **13** is opened so that the fuel intake or flow passage **20** through the intake pipe **12** is in open communication with the passage of the vehicle fuel inlet pipe **17** to allow fuel to be pumped therethrough. Once a fueling operation has been completed and the fuel pump nozzle **22** has been removed from the fuel flow passage **20** of the intake pipe **12**, the fuel intake device can then be pivoted downwardly in the direction of arrow **18'** (**FIG. 4A**) to move the body to its closed position whereupon the proximal and distal ends of the body and vehicle fuel inlet pipe **17**, respectively, are moved out of registration so as to close off and substantially seal the passage therebetween, as indicated in **FIG. 4B**.

[0031] As further indicated in **FIGS. 2-4B**, a lid or cover **36**, such as typically found on most vehicles, further generally will be provided attached to the base portion **13** (**FIGS. 2-3**) or to the intake pipe itself (**FIGS. 4A-4B**) of the fuel intake device **10** of the present invention, for enclosing the fuel intake well or recess **14** (**FIG. 4A**). When the fuel intake device is in its closed position as shown in **FIG. 4B**, the cover will be lowered to a closed and covering position, enclosing the recess **14**. In addition, a lock (not shown) can be provided so as to secure the cover in a closed and locked position and prevent access to the fuel intake device and fuel inlet pipe of the vehicle when the fuel intake device is in its closed and locked position, which lock can be remotely actuated, such as by a button within the vehicle, or electronically for added security.

[0032] Still further alternative embodiments or designs of the fuel intake device **10** are illustrated in **FIGS. 5 and 6**. In each of these embodiments, the cover **36** includes a stopper

38 (FIG. 5) or a sleeve **40** adapted to engage and close/seal the open end **42** of the vehicle fuel inlet pipe **17**. The stopper **38 (FIG. 5)** and/or sleeve **40 (FIG. 6)** can be formed from a flexible sealing material such as a rubber, plastic, or other corrosion-resistant, synthetic material that will either engage and fit within the opening **42** of the vehicle fuel inlet pipe **17** as indicated in **FIG. 5**, or alternatively, engage and fit over the open end **42** of the vehicle fuel inlet pipe **17** as shown in **FIG. 6**. Alternatively, the stopper **38 (FIG. 5)** or sleeve **40 (FIG. 6)** can be formed from a substantially rigid, corrosion resistant material and include a gasket or sealing ring formed from a sealing material such as rubber or other synthetic material, and which is adapted to engage and fit tightly about, mate to, or fit within the open end of the vehicle fuel inlet pipe to form a substantially air tight seal therebetween. As indicated in **FIGS. 5 and 6**, the cover can simply be pivoted in the direction of arrows **18** and **18'** between its open and closed positions for unsealing and sealing the vehicle fuel inlet pipe.

[0033] **FIGS. 7A-8B** illustrate yet a further embodiment of the fuel intake device **50**. In this embodiment, the fuel intake device includes a body portion typically formed as a cylinder **51 (FIGS. 7A, 8A, and 8B)** that is pivotally received within an inner housing or well **52 (FIGS. 7B and 8B)** mounted within the vehicle. The cylinder **51** typically is pivotally attached to the housing by pins or axles **53 (FIG. 8B)** received within openings **54** formed in the end walls **56** and **57** of the housing as indicated in **FIG. 8B**. As discussed above, the cylinder **51** can be formed from a durable, lightweight, corrosion resistant material such as aluminum, steel or other metals, or can be formed from a synthetic material such as various plastics, and typically is approximately 3-4 inches in diameter, although other size cylinders can be used sufficient to enable ease of access of the nozzle of the gasoline pump to fit therewithin, while at the same time enable the cylinder to easily rotate between an open, operative position and a closed, non-operative position.

[0034] As shown in **FIGS. 7A and 8A**, the cylinder **51** generally includes a body **58** having opposed ends **59** and **61** at which the hinge pins **53** are mounted, and a cover portion **62** formed or mounted along an upper side portion thereof. The cover portion **62** is adapted to close and seal the housing when the cylinder is in a non-operative, closed position, and can include a sealing material such as a rubberized or silicone gasket applied about the edge of the cover so as to form a substantially airtight seal with the edges of the housing. As indicated in **FIGS. 7A and 8A**, the cylinder body further includes a recessed or cut-away portion **63** having a nozzle passage or port **64** formed at one end thereof. As the cylinder is rotated with the raising of the lid, the nozzle port **64** is moved into registration or communication with an opening **65** in the inner housing **52** and the inlet end **66 (FIG. 8B)** of the vehicle fuel inlet pipe.

[0035] The nozzle port or passage **64** generally has a diameter sufficient to facilitate the receipt of a gasoline nozzle or pipe and has an approximately $\frac{1}{8}$ - $\frac{1}{16}$ inch rim or seat **67 (FIG. 8A)** formed about its upper end and which extends into the cut-away portion of the cylinder body to facilitate the seating of a sealing material or gasket of the gasoline nozzle to fit over and bear against the rim to prevent escape of gas vapors, etc. In addition, a gasket or sealing material also can be provided around the inlet end of the vehicle fuel pipe and/or about the bottom end of the nozzle

port of the cylinder so that these ported openings are substantially sealed against air, water, and other debris or fluids flowing into the vehicle fuel inlet pipe when the cylinder is in its closed, non-operative position, such as indicated in **FIG. 8B**.

[0036] When the lid is opened, the cylinder is rotated upwardly until the portion extending below the cylinder will contact or engage the top opening of the housing, which will prevent further pivoting movement of the cylinder with its nozzle port or passage being aligned with the inlet opening of the vehicle fuel inlet pipe. At this point, the gasoline nozzle can be received within the nozzle port **64 (FIG. 7A, 8A)** for input of fuel into the vehicle. Upon completion of the fueling operation, the nozzle will be removed and the lid closed, causing the cylinder **51** to be rotated to its non-operative position and closing off the inlet end of the fuel inlet pipe. In addition, a spring or similar biasing mechanism can be provided for urging or biasing the cylinder to its closed, non-operative position. The cylinder further can be locked in place, such as by conventional gas compartment locking mechanism that requires a remote access or opening or can simply be biased to its closed, locked position as desired. The cylinder can be oriented in any alignment desired, such as diagonal, though horizontal and vertical are envisioned to be typical.

[0037] **FIGS. 9A-9C** illustrates yet a further embodiment **80** of the fuel intake device of the present invention. In this embodiment, the fuel intake device **80** is oriented substantially vertically and includes an inner chamber or housing **81 (FIGS. 9A and 9B)** having a substantially cylindrical side wall **82** that terminates at a substantially flat wall **83**, a portion of which, indicated at **84** in **FIGS. 9A and 9B**, extends or projects outwardly and typically is flush with the surface of the vehicle. The inner housing includes upper and lower end walls **86** and **87** that, together with side walls **82** and **83**, define an open nozzle receiving area **88** therein. A nozzle receiving opening port **89** is formed in the bottom end wall **87** of the inner housing for receiving the nozzle of a gas pump therein. The nozzle opening port **89** can be formed with a rim **91** or can have a sealing or gasket material applied thereabout to form the rim, which provides a seat and bearing surface against which a rubber skirt or cover of a gasoline nozzle can bear, so as to seal the port or opening against the escape of fumes.

[0038] As illustrated in **FIG. 9C**, the fuel intake device **80** of this embodiment further includes an outer housing **92** having a substantially cylindrical side wall **93** with upper and lower end walls **94** and **96** defining an open ended chamber or recess **97** in which the inner housing **81 (FIG. 9A)** is received. Openings **98** and **99 (FIG. 9A)** are formed in the upper and lower end walls **94** and **96** of the outer housing and receive hinge pins **101** attached to the upper and lower end walls of the inner housing to enable pivoting movement of the outer housing with respect to the inner housing. The outer housing further includes a nozzle opening **102** formed in the lower end wall thereof, which typically will include a gasket or other flexible, rubberized sealing material about its upper and lower edges thereof.

[0039] The outer housing is rotatable with respect to the inner housing to move the outer housing between a closed, non-operative position and an open, operative position, wherein its nozzle opening **102** is moved into communica-

tion with the nozzle opening port **89** (**FIG. 9A**) formed in the lower end wall of the inner housing and with an inlet end of a vehicle fuel inlet pipe. As a result, a passage between the nozzle opening port of the inner housing and inlet opening of the vehicle fuel inlet pipe and enable the nozzle of the fuel pump to be inserted therein for inputting fuel. When the outer housing is in its closed, non-operative position, the inlet opening of the vehicle fuel inlet pipe will be substantially sealed (other than a pressurization valve and a depressurization valve) to prevent escape of fumes or the passage of water, debris or other materials into the vehicle fuel inlet pipe. Still further, a biasing member, such as a spring, can be provided to bias the outer housing toward its closed, non-operative position to maintain the outer housing in its closed, non-operative position until a fueling operation has commenced.

[0040] In addition, while the present invention has generally been illustrated with the cover being pivotable upwardly so as to open and permit access to the vehicle fuel intake device of the present invention, it will be understood by those skilled in the art that the cover also can be mounted and opened in other orientations or directions, such as being opened laterally toward either side of the vehicle well, or further pivoted downwardly as necessary or desired. The present invention therefore is not intended to be, nor should it be limited to a specific orientation or direction of opening of the cover.

[0041] Still further, in order to try to help reduce static discharge when pumping gas, the vehicle fuel intake device of the present invention can be subjected to being weighed or biased toward its closed position, such as by a spring or similar biasing element. Accordingly, an operator generally will be required to grasp and hold the cover of the vehicle fuel intake device in its open position to insert the fuel/gas pump nozzle therein. As a result, any static electricity built up between the operator and the vehicle likely will be discharged before the fueling operation can be started to reduce the risk of accidents from static discharges.

[0042] Additionally, the vehicle fuel intake device of the present invention also can be utilized with a fuel vapor reclamation system shown in **FIGS. 10-11** that will generally include a condenser coil or unit mounted about the vehicle fuel inlet pipe. The condenser coil extends along the fuel inlet pipe from a first or vapor inlet end positioned within the vehicle fuel tank, to an upper, distal end outside of the fuel tank and adjacent the upper end of the vehicle fuel inlet pipe that is in communication with the vehicle fuel intake device (**FIGS. 1-9B**) of the present invention as discussed above. As fuel is received in the fuel tank, the fuel tends to displace fuel vapors that have built up within the fuel tank as the fuel tank was emptied during operation of the vehicle. Such vapors are received at the open inlet end of the condenser unit and are passed about the vehicle fuel inlet pipe toward the upper end thereof. As a result, the vapors generally will be caused to condense into a liquid state. The now liquid fuel can then be fed back into the vehicle fuel inlet pipe at the upper, distal end of the condenser coil for reintroduction into the fuel tank. The amount of vapors being released into the surrounding environment thus can be reduced, as well as at least a portion of the fuel lost via the escape of such vapors, reclaimed.

[0043] As shown in detail in **FIGS. 10 and 11**, the fuel vapor reclamation system includes a series of coils **1035**

mounted or formed within or along the fuel intake pipe **1012** that extend along the fuel intake pipe **1012** as it travels at a slightly downward angle from where an upper, intake end **1020** through which a fuel nozzle inputs a fuel flow **1021** to where the fuel flow **1021** is dispensed into the fuel tank **1015** of the vehicle. As further shown in **FIG. 10**, the upper, intake portion **1020** of the fuel intake pipe **1012** generally is of a conventional size and includes an expanded or wider size segment or section **1013** extending from the point of abutment of the intake pipe **1012** abutment with the fuel tank **1015** (shown for reference at numeral **1016**) to a lower or discharge end **1017**. This increased size or volume of the fuel intake pipe **1012** is included to accommodate, without an appreciable reduction in the input of the fuel flow, a series of spaced coils **1035** as indicated in **FIG. 10**.

[0044] As shown in further detail in **FIG. 11**, the coils **1035** generally are of a size and spacing to permit the fuel flow **1021** to easily pass between the coils **1035** to not interfere with the fuel flow. The coils **1035** connect to a fume tube **1030** that runs along the top of the fuel intake pipe **1012** and wraps or is coiled about the intake pipe adjacent the upper end **1020**. The coils **1035** receive fuel fumes **1025** from the fuel tank **1015** through an intake hole **1031** at the bottom of coils **1035** and which opens the fuel tank **1015**. The fuel fumes **1025** generally are urged into and travel along the coils **1035** and to a tube outlet hole **1032** and into fume tube **1030** as a fuel flow fills the tank, which accordingly displaces the fumes in the tank. At the same time, the incoming fuel flow will cool the coils to promote condensation of the fumes passing therethrough.

[0045] The coils **1035** channel and permit condensed fuel/fumes **1037** to flow in an opposite direction to the fuel fumes **1025** and reenter as fuel the fuel tank **1015** as fuel. The fume tube **1030** runs along the fuel intake pipe **1012** to point **1016**, where the intake pipe turns and proceeds upwardly to its upper end **1020** as shown in **FIG. 10**. The fume tube **1030** can proceed in any manner up the remainder of the fuel intake pipe **1012**, but will typically wrap or coil about the outside of the fuel intake pipe **1012** as shown. The fume tube **1030** also can be resident within the fuel intake pipe **1012**, either being integrally formed as a separate channel within the intake pipe or otherwise mounted or positioned therein, to further provide cooling from the fuel flow to enhance condensation of the fuel fumes **1025**. Regardless of whether the fume tube **1030** is wrapped on the inside or outside of the fuel intake pipe **1012**, the fume tube **1030** generally will be cooled by the incoming fuel flow **1021**. Alternatively, or in addition to the cooling provided by the incoming fuel flow **1021**, the coils and fume tube can be cooled by attachment to the air conditioning unit of the vehicle or some other method (not shown). Such cooling by the air conditioner or other method would provide an additional measure to maintain or create a desired temperature differential to facilitate condensation of fuel fumes in the coils or fume tube.

[0046] The expanded section **1013** of the fuel intake pipe **1012** extends along the fuel tank **1015** until the fuel intake pipe **1012** extends into the fuel tank **1015** to disperse the flow of fuel into the fuel tank. This transition from a wider sized fuel intake pipe **1013** to a more conventional or reduced sized fuel intake pipe **1012** can vary per fuel tank **1015** and vehicle. The fuel intake pipe **1012** generally returns to a regular or narrower sized fuel intake pipe **1012** toward its discharge end **1017** so that the fumes do not rise

up the pipe and circumvent the coils **1035**. As also shown in **FIG. 10**, a splash plate **1045** can be inserted near the end of the fuel intake pipe **1012**, mounted on a support **1046**.

[0047] The coils **1035** are formed of a shape and size to remove the fuel fumes **1025** from the tank **1015** and to not impede the fuel flow **1021** proceeding along the fuel intake pipe **1012** and entering the fuel tank **1015**. Although some fuel fumes **1025** will inherently escape initially upon fueling, as the fuel intake pipe **1012** becomes filled with fuel during a fueling operation, the displaced/escaping fuel fumes **1025** generally will be directed to and pass through the coils **1035**. The coils **1035** are dispersed at varying locations along the fuel intake pipe **1012** to promote more even distribution of the fumes through the coils **1035** as the fuel flow **1021** fills the fuel tank **1015**. Although **FIG. 10** shows only two coils along the fuel intake pipe **1012**, the coils **1035** typically will extend from point **1016** to the end of the fuel intake pipe **1012**. The coils **1035** are cooled by the fuel flow to cause the fuel fumes **1025** in the coils and fume tube **1030** to condense as the fuel tank **1015** fills. The condensed fuel **1037** can either pass back into the tank from the coils or from the upper end of the fume tube after the filling operation is ended. As the fuel tank **1015** level rises during filling, some of the coils **1035** will be taken out of operation because they will become below the fuel level.

[0048] The coils **1035** further will gradually fill with fuel as the fuel level continues to rise. The wider sized portion of the fuel intake pipe **1013** will thus provide extra room for the fuel to flow a bit slower in the middle of the intake pipe **1012** while the fuel continues to pour out the discharge end of the fuel intake pipe **1012** and while the fuel fumes **1025** continue to rise through the coils **1035**. The coils **1035** are also generally formed of a size to promote condensation and can be included in any number and arrangement along the fuel intake pipe **1012** with the number and size dependent upon the type of fuel, length of intake pipe **1012**, and type of tank **1015** used in the vehicle. The fume tube **1030** extends up the fuel intake pipe **1012** and spirals around the inlet portion of the intake pipe **1012** to further provide a condensation path for the fumes before they are vented into the vapor collector of the fuel nozzle.

[0049] The coils **1035** in this embodiment also have been shown in the figures as round in shape, but can be formed in any desired shape. For example, the coils **1035** may be elliptical or rectangular, have a flattened slot-like center, be rounded only on the ends, or be merely a slit. Additionally, the coils **1035** may be provided with multiple chambers therein to encourage condensation of the fuel from the fuel fumes **1025**. Still further, although the condensation devices provided herein have been shown as coils, any other configuration that permitted or encouraged recycling of fumes into usable fuel could be utilized. For example, one could utilize fins such as seen in radiators in place of the coils.

[0050] The intake and outlet holes **1031** and **1032** in the coils **1035** closer to the upper end of the intake pipe can be larger than the holes **1031** and **1032** in the coils **1035** closer to the lower section or end of the intake pipe to further aid in evenly distributing the fuel fumes **1025** along the array of coils **1035**. Additionally, selected ones of the tube outlet holes **1032** also could house a valve that would open an even larger outlet opening once the fuel within the tank has reached a certain point that those valved holes (not shown)

were the only ones receiving fuel fumes **1025**. The use of such a valve could provide a further release mechanism to let out additional fumes as needed. Thus, the fuel tank **1015** could be filled to capacity without having the fuel nozzle shut off prematurely.

[0051] The coils **1035** of the present embodiment can be integrated with the other embodiments detailed above. For example, with the cylinder **51** of **FIGS. 1-4** and **7-9**, a separate hole (not shown) could be included that aligns with the body or pipe portion **12** of the fuel intake device **10**. As the cylinder **51** turns, the pipe **12** would allow any fuel fumes **1025** that have not condensed to escape. This design will ensure that the fuel fumes **1025** will not escape when the fuel intake device is placed in a closed position. Additionally, this design will meet the current environmental standards for fueling stations by allowing a nozzle vapor collector, typically on the outside of the fuel nozzle, to collect the fuel fumes **1025** escaping from the nozzle and from the fume tube **1030**.

[0052] As further shown in **FIGS. 12 and 13**, a pressurization/depressurization valve **1201** can be placed in the base portion **1213** of a fuel intake device **1210** to rotate over the vehicle fuel inlet pipe **1217** when the fuel intake device **1210** is in the closed, non-operative position. The pressurization/depressurization valve **1201** generally includes pressurization and depressurization passages or ports **1202** and **1203**, respectively, that communicate with a relief passageway **1204** to facilitate the pressurization or depressurization of the valve **1201** as required by the fuel tank **1215** and/or movement of the fuel intake device **1210**. The pressurization/depressurization valve **1201** can be recessed into the base portion of the fuel intake device to an extent sufficient to not interfere with the fuel intake device **1210** or the vehicle fuel inlet pipe **1217** during rotation from closed to open or open to closed positions. Typically, the pressurization/depressurization valve **1201** is formed in or mounted on a removable cap **1205**, and is received in an end of the relief passageway **1204**, or in an alternative unsealed area, to allow communication with the pressurization valve **1201** and depressurization valve **1202**. The removable cap **1205** is typically screw-threaded into the base portion **1213**, but can be attached to the base portion in any manner that permits an airtight seal.

[0053] As shown in detail in **FIG. 13**, the removable cap **1205** includes indentations **1207** capable of receiving a removal tool (not shown). The indentations **1207** are shown in **FIG. 13** as substantially oval-shaped, but can be of any configuration capable of receiving and engaging a removal tool for removal of the removable cap **1205** from the base portion **1213** of the fuel intake device. The removable cap **1205** thus will allow for testing of the pressurization/depressurization valve **1201** to enable the fuel intake device **1210** of the present invention to meet current emissions and environmental requirements of several states for testing of the vehicle's fuel and emissions control system.

[0054] The removable cap **1205** can also include a lock mechanism (not shown) for securing the removable cap **1205** within the base portion **1213**. Such a lock mechanism can include any system capable of retaining the removable cap **1205** in place, including locking pins. The lock mechanism can also interact with the removal tool to allow the removal tool to disengage the lock upon insertion of the

removal tool into the indentations 1207 and/or to engage the lock upon removal of the removal tool. For example, the engaged lock mechanism could operate with a spring operable by the removal tool to disengage a pin or pins holding the removable cap securely in place. The removal tool could operate to release the spring for removal/release of the removable cap 1205 from the base portion 1213. To replace the removable cap 1205, the removal tool could also compress the spring and engage the pin or pins for locking the removable cap 1205 in place. In this manner, a tester could remove the cap for environmental testing and receive a positive indication that the cap was replaced in the proper position upon reinstallation.

[0055] Additionally, the other elements herein can be replaced with elements that perform similar functions, but that are arranged in different configurations. For example, the fume tube has been shown mated with the vehicle fuel intake pipe, but could be formed independently and aligned along the top of the vehicle fuel intake pipe. In addition, the splash plate is shown as attached to the wall of the fuel tank, but could be attached to and extend from the vehicle fuel intake pipe.

[0056] In an alternative embodiment, an internal valve is provided to fit into an existing gas intake pipe (as original equipment or to replace an existing gas cap). The internal valve is housed in a chamber that can be spherical or cylindrical, but that has been shown in FIGS. 14-18B as cylindrical for simplicity. The fuel intake device 1410 of FIGS. 14-18B utilizes corresponding numbering for corresponding features from other embodiments; including fuel intake device 1410, intake body or pipe 1412, pivot pins 1416, and fluid flow passage 1420 defined through the intake body or pipe 1412 and which communicates with the vehicle intake flow pipe 1417. The fuel intake body 1412 is generally formed from a metal material such as aluminum or other types of corrosion resistant materials such as various synthetic or plastic materials.

[0057] FIGS. 14-15 show the vehicle fuel intake device 1410. In FIG. 14, the fuel intake body 1412 generally includes flow passage 1420 with a forward or proximal end 1424, an intake opening 1426, and a distal end 1428. The fuel intake body 1412 is allowed to pivot on pins 1416, as shown in FIG. 15, to move between open and closed positions using a body handle or lip 1409. The fuel intake body 1412 can also include a stop 1411 to arrest the rotation from the closed to open position. Although the stop 1411 is shown in the FIGS. 14-18B as an edge that will engage the base portion 1413, the stop 1411 could be a bracket, lip, or any arrangement that will enable the passage 1420 to be aligned with the vehicle fuel inlet pipe 1417. The fuel intake body 1412 can also include any of the features of the embodiments detailed above. As indicated in FIGS. 14 and 18B, the lower portion 1408 of the intake body completely covers the opening of the fuel intake pipe 1417 when the fuel intake device 1412 is in the closed position.

[0058] As shown in FIG. 14, pressurization/depressurization valves 1401, 1402 can be provided in a lower portion 1408 of the fuel intake body 1412. The valves are aligned with the intake pipe 1417 when the device is in the closed position with respect to the vehicle fuel inlet pipe 1417. The pressurization/depressurization valves 1401, 1402 generally include pressurization and depressurization passages or

ports that communicate with a relief passageway 1403 to facilitate the pressurization or depressurization of the valves 1401, 1402 as required by the fuel tank and/or movement of the fuel intake device 1410. The pressurization/depressurization valves 1401, 1402 also could be recessed into the base portion of the fuel intake device to an extent sufficient so as to not interfere with the fuel intake device 1410 or the vehicle fuel inlet pipe 1417 during rotation of the fuel intake body 1412 between its closed and open or open and closed positions. The pressurization/depressurization valves 1401, 1402 also could be formed in or mounted on a removable cap 1405 that would be receivable into an end of the relief passageway 1403, or in an alternative unsealed area. The pressurization/depressurization valves 1401, 1402 also could be formed as an integral part of the body 1412 of the fuel intake device 1410. As an integral unit, the pressurization/depressurization valves 1401, 1402 would render themselves to testing in an analogous manner as traditional fuel caps that are removed and placed in a testing apparatus for pressurization/depressurization.

[0059] As shown in FIGS. 16 and 17, the fuel intake body 1412 typically is pivotally mounted within a larger cylindrical base portion 1413 and can be pivoted through the use of pivot pins or rods 1416 from a closed position that occludes or seals the vehicle flow intake pipe 1417 to an open position in alignment with vehicle flow intake pipe that opens the intake pipe to allow fuel to flow therethrough. As a result, the intake pipe 1412 of the fuel intake device 1410 is enabled to pivot from a closed position, as shown in FIG. 18B, to an open position as illustrated in FIG. 18A, by being rotated in the direction of arrow 1418. The base portion 1413 generally is formed from a metal, synthetic, or plastic material and will be secured within a recess or well 1414 of the vehicle (FIGS. 18A and 18B). The base 1413 further can be of a reduced size sufficient to support the intake pipe 1412 and define a valve between the intake pipe 1412 and a vehicle fuel inlet pipe 1417. The intake pipe or body 1412 of the fuel intake device 1410 defines the intake or flow passage 1420 through which fuel can be pumped from a fuel pump nozzle 1422, as indicated in FIG. 18A. With reference to FIG. 18A, the distal end 1428 of the fuel intake body 1412 communicates with a proximal end 1434 of the extension 1433 to define a closable valve between the proximal and distal ends of the intake pipe 1412 and the extension 1433. The extension 1433 then communicates with fuel inlet pipe 1417 after being received therein.

[0060] FIGS. 16 and 17 show the intake pipe 1412 of FIGS. 14-15 in further detail, illustrating the intake pipe communicating with a pipe fitting extension 1433 that is formed to fit into the gas intake pipe 1417 to install the intake device 1410 in the vehicle. The pipe fitting extension 1433 is designed to fit snugly within the gas intake pipe 1417 and can be threaded to allow removal from the vehicle or can be permanently mounted within the gas intake pipe 1417. The pipe fitting extension 1433 can be of any length necessary to extend into the pipe and securely hold the fuel intake device 1410 therein. Typically, the pipe extension 1433 will not extend into the manufacturer's valve resident in the gas intake pipe 1417. Additionally, since the pipe fitting extension 1433 could be affixed over or extend forwardly from the gas intake pipe 1417, the present embodiment should not be limited to encompass only internal fittings. As the intake device is pivoted, the intake pipe will be moved into the open position with the flow passage

1420 aligned within the extension **1433** for receipt of fuel into the gas intake pipe **1417**.

[0061] In order to ensure exact placement of the fuel intake device **1410** into the recess **1414** and fitting into the pipe **1417**, the lid should be facing a driver standing outside the vehicle and should open toward the inside of the vehicle. This desired placement will likely result in different size or configurations of the fuel intake device as needed to fit different model vehicles, depending upon how the fuel inlet systems/components are designed. Since fuel intake pipes are not identical between manufacturers, washers, gaskets, rings, or other sealing devices also could be used to help fit and secure the fuel intake device over the fuel intake pipe or pipe fitting extension to ensure proper alignment with the threads for a tight fit and seal when the fuel intake device **1410** is installed. For example, the fuel intake device could include three gaskets that could be added or removed individually as desired to align the fuel passage in a preferred orientation during installation.

[0062] **FIGS. 18A and 18B** show the fuel intake device **1410** received into the vehicle well **1414** and pipe fitting extension **1433** inserted into the gas intake pipe **1417**. **FIG. 18A** shows the fuel intake device **1410** in an open position with intake passage **1420** aligned with gas intake pipe **1417** after rotation of the fuel intake device **1410** and a cover **1436** in the direction of arrow **1418**. As a result, when the intake pipe **1412** of the fuel intake device **1410** is pivoted in the direction of arrow **1418** to its open position, the fuel intake or flow passage **1420** through the intake pipe **1412** is placed in open communication with the passage of the vehicle fuel inlet pipe **1417** to allow fuel to be pumped from the nozzle **1422** therethrough.

[0063] Once a fueling operation has been completed and the fuel pump nozzle **1422** has been removed from the fuel flow passage **1420** of the intake pipe **1412**, the fuel intake device **1410** can then be pivoted downwardly with handle **1409** in the direction of arrow **1418'** (**FIG. 18A**) to its closed position whereupon the proximal and distal ends of the intake pipe and vehicle fuel inlet pipe **1417**, respectively, are moved out of registration so as to close off and seal the passage therebetween, as indicated in **FIG. 18B**.

[0064] As further indicated in **FIGS. 18A and 18B**, a lid or cover **1436**, such as typically found on most vehicles, generally will be provided for enclosing the fuel intake well or recess **1414**. When the fuel intake device is in its closed position as shown in **FIG. 18B**, the cover **1436** will be lowered to a closed and covering position, enclosing the recess **1414**. The lid **1436** could alternatively be formed as a part of, or connected to, the outer cylinder or base **1413** so as to rotate with the base or can be independently moveable as desired. Additionally, to facilitate the pressurization/depressurization valve **1401**, the lid **1436** can include a small hole therethrough (not shown). In addition, a locking system (not shown) could be provided so as to secure the cover in a closed and locked position and prevent access to the fuel intake device and fuel inlet pipe of the vehicle when the fuel intake device is in its closed and locked position. The locking system could include a lock for the cover **1436** and/or a lock for the fuel intake device **1410** for additional security. The fuel intake device **1410** lock would prevent the device from untwisting and from flipping to the open position. The locks could be remotely or electronically

actuated, such as by a button within the vehicle or by a key chain device, for added security.

[0065] The fuel device **1410** of the present embodiment can be formed of any necessary dimensions to fit within a recess of a vehicle. For example, the fuel intake body **1412** can be about 1-1.4 inches in width and about 1-2 inches in diameter with passage **1420** having a diameter of approximately 0.75 to 1.5 inches, and about 0.1-0.2 inches on each side of the passage **1420**, though greater or lesser dimensions also can be used as needed. The pivot rods or pins **1416** each can be about 0.18 inches in diameter and extend approximately 0.1 inch or more from the side of the fuel intake body **1412**. Further, the outer cylinder typically can be about 2-3 inches in diameter, and the pipe extension **1433** typically will be formed with a hole or passage of a sufficient size to match and align with the fuel intake passage **1417**.

[0066] The embodiment of **FIGS. 14-18B** has been described herein for use as a fuel intake device, but it is contemplated that such device could be used in several applications, especially for use as a device for inputting oil for the engine, for inputting water for the radiator or washer reservoir, or for inputting other fluids.

[0067] It will be understood by those skilled in the art that while the present invention has been discussed with regard to preferred embodiments, various changes, additions, and modifications can be made thereto without departing from the spirit and scope of the invention.

1. A fuel intake system for a vehicle comprising:

- a fuel intake pipe connected to a fuel tank of the vehicle and having an inlet end for receiving a flow of fuel;
- at least one coil mounted along the fuel intake pipe and including an inlet end and an outlet; and
- a fume tube extending along the fuel intake pipe and in communication with the fuel intake pipe;

wherein the at least one coil extends through the fuel intake pipe and is connected to the fume tube so as to direct fumes from the fuel tank to the fume tube for recovery.

2. The fuel intake system of claim 1 wherein the fuel intake pipe further comprises an expanded section having a diameter greater than a diameter at each end section of the fuel intake pipe.

3. The fuel intake system of claim 1 wherein the at least one coil is sized to permit a fuel flow to pass through the fuel intake pipe.

4. The fuel intake system of claim 1, wherein the inlet end of the at least one coil receives fuel fumes displaced from the fuel tank by the flow of fuel.

5. The fuel intake system of claim 4, wherein the fuel flow cools the at least one coil as the fuel flow passes through the fuel intake pipe to promote condensing of the fuel fumes passing through the at least one coil.

6. The fuel intake system of claim 1, and further comprising a body pivotally mounted adjacent the inlet end of the fuel intake pipe, defining a flow passage and moveable from an open position in communication with the fuel intake pipe and a closed position so as to substantially seal the inlet end of the fuel intake pipe.

7. The fuel intake system of claim 6, and further including a housing mounted in the vehicle and which pivotally receives the body therein.

8. The fuel intake system of claim 6, wherein the body is formed from a corrosion resistant material.

9. The fuel intake system of claim 6, wherein the housing is positioned within a surface of the vehicle and the cover includes an appearance corresponding to the surface of the vehicle.

10. The fuel intake system of claim 1, wherein the fume tube proceeds along an exterior portion of the fuel intake pipe.

11. The fuel intake system of claim 1, wherein the fume tube extends along an interior portion of the fuel intake pipe.

12. A method for fueling a vehicle comprising:
inputting a flow of fuel into a fuel tank of the vehicle through a fuel intake pipe;
receiving fuel fumes displaced by the flow of fuel filling the fuel tank through at least one coil that passes through the fuel intake pipe;
at least partially condensing the fuel fumes passing through the at least one coil; and,
returning the partial amount to a fuel tank of the vehicle.
13. The method of claim 12 and further comprising:
dispensing the fuel fumes from the at least one coil into a fume tube that proceeds along the fuel intake pipe.

* * * * *