

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
7 April 2005 (07.04.2005)

PCT


(10) International Publication Number
WO 2005/031518 A2

- (51) International Patent Classification⁷: **G06F**
- (21) International Application Number: PCT/US2004/031157
- (22) International Filing Date: 22 September 2004 (22.09.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:

60/481,407	22 September 2003 (22.09.2003)	US
10/711,495	21 September 2004 (21.09.2004)	US
10/711,494	21 September 2004 (21.09.2004)	US
- (71) Applicant (for all designated States except US): **SECURE DATA IN MOTION, INC.** [US/US]; 1875 South Grant Street, 10th Floor, San Mateo, California 94402 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **OLKIN, Terry M.** [US/US]; 104 Regent Drive, Los Gatos, California 95032 (US). **OLKIN, Jeffrey C.** [US/US]; 1015 Mountain Home Road, Woodside, California 94062 (US). **MOREH, Jahanshah** [US/US]; 1131 San Ysidro Drive, Beverly Hills, California 90210 (US).
- (74) Agents: **ROBERTS, Raymond E.** et al.; 1901 South Bascom Ave., Suite 660, Campbell, California 95008 (US).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,

[Continued on next page]

(54) Title: SYSTEM FOR DETECTING SPOOFED HYPERLINKS IN MESSAGES

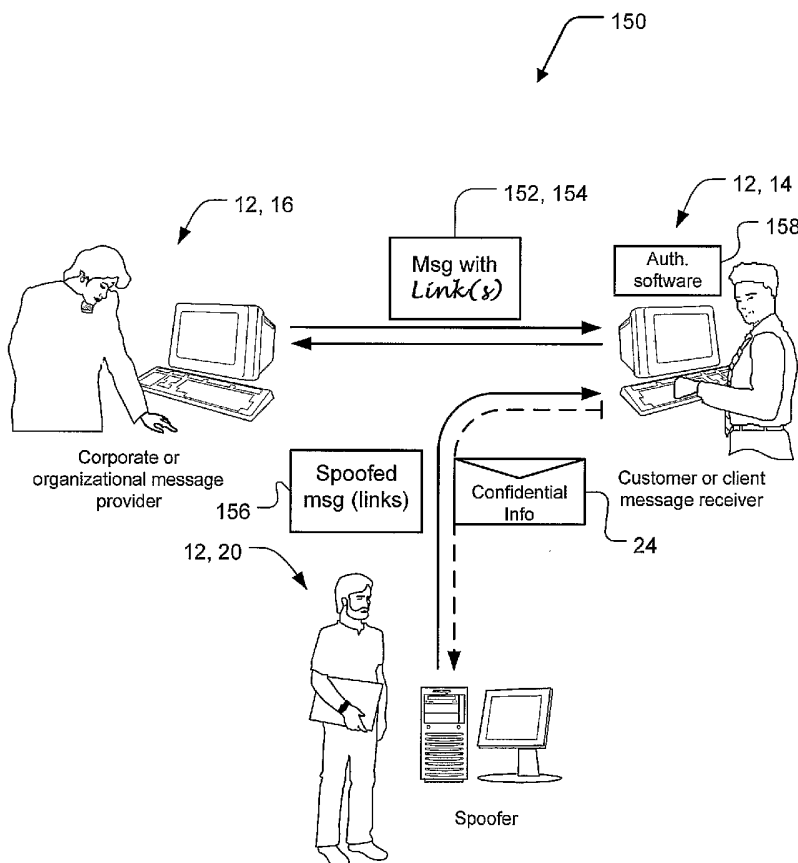

(57) Abstract: A system (50, 150) for assisting a user (14) to determine whether an email (18) or a hyperlink (152) in a message (154) are spoofed. A computerized system with a display are provided with logic (54, 158). The logic determines whether the email includes an authenticity mark (52) including an originator identifier (102) and encrypted data (104), or listens for activation of the hyperlink in the message and extracts the originator identifier and encrypted data from the hyperlink. The encrypted data is decrypted based on the originator identifier. For the email, the logic displays whether the email includes the authenticity mark, whether the encrypted data decrypts, and information based on the authenticity mark and the decrypted data. For the message, the logic presents a warning dialog or a confirmation of authentication conveying the owner name and the domain name for the hyperlink target URL and redirects the user to there.

WO 2005/031518 A2



TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,

Published:

— *without international search report and to be republished upon receipt of that report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

SYSTEM FOR DETECTING SPOOFED HYPERLINKS IN MESSAGES

TECHNICAL FIELD

5 The present invention relates generally to electronic communications, and more particularly to securing email and other message forms including hyperlinks.

BACKGROUND ART

10 The use of spoofed hyperlinks has recently grown to the point that it is undermining many desirable forms of electronic communications. In this discussion, spoofing of uniform resource locators (URLs) in email messages is used as a primary example, but this is not the only example of this growing problem and the discussion provided here should not be interpreted as restrictively applying only to email.

15 One of the biggest problems now preventing email from becoming a legitimate means of business communications is email message spoofing. A spoofed email message is one that appears to the receiver to have come from a perfectly legitimate source, usually a reputable individual, firm, or company. Furthermore, an email, spoofed or otherwise, but typically spoofed, can include one or more spoofed hyperlinks. Such spoofed hyperlinks (links) can
20 lead the receiver of the email down a path, typically to a spoofed web site, such that the email recipient is asked to reveal some “important” data, usually personal data like a social security number, account number, personal identification number (PIN), etc. Since the email, the URL (i.e., the hyper link, or “link”), and the supporting web site all appear outwardly to be completely authentic (sometimes even including the use of images stolen right from a
25 legitimate entity’s web site), the email recipient is usually completely unaware of what is going on.

 FIG. 1 (background art) is a block diagram depicting a representative spoofing scheme 10. There are three parties 12 involved here: a customer, client, or user (user 14) whom we are trying to protect; a trusted firm or organization (organization 16) that wants to
30 use an electronic communication or email message (email 18) for business communications without worrying about spoofing; and an attacker or spoofer (spoofer 20) who sends a spoofed email 22 in an attempt to elicit a response 24 from the user 14 to learn personal data or confidential information (information) for malicious purposes.

The parties **12** each use appropriate computerized devices to send and receive the email **18**, spoofed email **22**, and response **24**. For example, the organization **16** may use computerized workstations or terminals and a server; the user **14** may use a personal computer (PC) or personal digital assistant (PDA), and the spoofer **20** may use a PC and a server. For the sake of simplification we herein treat the parties **12** and the hardware they use as synonymous.

The trusted organization **16** has a business relationship with its users **14** and may or may not have used email to previously communicate with them. FIG. 1 shows an organization-to-user path **26** for conventional email **18**, as well as a user-to-organization path **28** for a user's requested action, typically initiated by the user **14** following a URL to the web site of the organization **16**.

The problem is that the spoofer **20** can send the spoofed email **22** to the user **14** via an undetected spoofer-to-user path **30**, and this spoofed email **22** can include a spoofed link to a spoofed web site. Upon receipt of such a spoofed email **22**, the user **14** may respond under the assumption that it is the organization **16** that is requesting information. However, rather than the response from the user **14** proceeding via the intended user-to-organization path **28**, by following the spoofed link the user **14** proceeds via an unintended user-to-spooper path **32** to a spoofed web site of the spoofer **20**. Unaware of the deceptive tactics being employed, the user **14** may then divulge information at this spoofed web site that would not otherwise be shared with the spoofer **20**.

A recent example of this involved a large U.S. bank, its customers in the U.S. and spoofed emails with links that led to a computer server listed in Internet IP address databases as belonging to a futures trading company in China. The spoofed emails appeared to be from the U.S. bank, including original trademark logos and other images that were actually linked in via HTML code from the U.S. bank's own web servers in the continental United States. The spoofed emails informed the receivers that there had been a change in the bank's terms and conditions related to their accounts, and invited them to click a link to view the new terms and conditions. The link in these spoofed emails, however, led to the server in China rather than to the U.S. bank's website on a server in New York. These spoofed emails were sent to at least thousands of people, most of whom did not even have accounts with the bank and who simply deleted them. Unfortunately, many people who were the customers of the U.S. bank, probably numbering at least in the hundreds, received and clicked on the link in these spoofed emails.

—3—

The text labeling of this link read “Click here to access our terms and conditions page ...” while the actual content of the link resembled:

```
href="http://www.SomeBank.com:ac%398HAAA9UWDTYAZJWVWAAAA  
9pYWwgc2l6ZT00PjxTVgc2l6ZT00PjxT3Aac%398HAAA9UWDTYAZJW  
5 VWAAAA9pYWwgc2l6ZT00PjxTVgc2l6ZT00PjxT@200.0.0.0/cgi-  
bin/s.pl?m=receiver@isp.com"
```

The link thus overtly contained the U.S. bank’s web address, but actually covertly linked to a server at the IP address 200.0.0.0 (changed here from the actual IP address used), and worked to send the receiver’s email address (e.g., receiver@isp.com) when the link was clicked. With
10 this alone, the spoofer learned the email addresses of receivers who likely had accounts with the U.S. bank, as well as the fact that those particular receivers would easily rely on spoofed emails. Furthermore, once such a naive receiver clicked on the link and arrived at IP address 200.0.0.0, they could be greeted with a request for private information, such as: “So we can determine your account type and present the specific terms and conditions applicable for it,
15 please enter your account number.”

As can be appreciated from this single example, spoofing can employ quite sophisticated social engineering and poses a serious threat to legitimate companies and firms and to their customers and clients.

Unfortunately, while very serious and constituting a problem approaching epidemic
20 proportion, spoofed emails **22** are merely the most notable current symptom of what is actually a much larger and rapidly growing problem. The hyperlinks in instant messages (IM), web pages, etc. are also subject to spoofing. To facilitate discussing the larger problem here, and the inventor’s presently discussed solution, we generically term the medium in which spoofed links appear as “messages.”

25 As messages containing spoofed links are sent to users, the problem becomes how to alert the users to the links in those that are being spoofed. Unfortunately, as can be seen from the email-based message example above, this is often quite difficult because the spoofed links may appear as normal ones, with only extremely detailed analysis of the context they are in allowing the user to uncover aspects which show the link to be a spoofed one.

30 However, an alternative way to consider the problem here is to flip it over. Rather than ask how can a user know a link is inauthentic, ask how can a user know that a link in a message is authentic? This, combined with some education (i.e., if a message does not present itself as being authentic, then it is not) can certainly slow down the spoofing problem.

However, this still leaves the problem of how does a message “present” itself as being authentic. Many in this field feel that it will be very difficult to completely eliminate the spoofing problem without a universal secure messaging solution, for instance, a system where every message is digitally signed at origin. However, because signing and verifying every message is cumbersome, there remains a need for a “next best” solution that is both easy to
5 deploy and easy for users to understand.

SUMMARY OF THE INVENTION

10 Accordingly, it is an object of the present invention to provide a system for detecting spoofed hyperlinks in messages.

Briefly, a preferred embodiment of the present invention is a system for assisting a user to determine whether an email comes from a purported originator. A computerized system having a display unit is provided. A logic in the computerized system determines
15 whether the email includes an authenticity mark including an originator identifier and encrypted data. A logic in the computerized system then decrypts the encrypted data into decrypted data, based on the originator identifier. A logic in the computerized system then presents to the user, on the display, whether the email includes the authenticity mark, whether the encrypted data decrypts successfully, and information based on the authenticity mark and
20 the decrypted data.

Briefly, another preferred embodiment of the present invention is a system for assisting a user to determine whether a hyperlink to a target uniform resource locator (URL) is spoofed. A computerized system having a display unit is provided. A logic in the computerized system listens for activation of the hyperlink. A logic then extracts an
25 originator identifier and encrypted data from the hyperlink. A logic decrypts the encrypted data into decrypted data based on the originator identifier. A logic determines whether the hyperlink includes the originator identifier and that the encrypted data decrypts successfully. A logic responsive to the logic that determines, then presents on the display unit a confirmation of authentication conveying the name of the owner and the domain name of the target URL, and redirects the user to the target URL. Otherwise, responsive to the logic that
30 determines, the logic that presents a warning dialog to the user on the display unit.

An advantage of the present invention is that it is well suited for application in electronic communications of e-mail, other message types, of files, and other information.

Another advantage of the invention is that it is both easy to deploy and easy for users to understand, while concurrently providing high security.

Another advantage of the invention is that the only means of infiltrating it using a regular spoofing attack is through human error.

5 And another advantage of the invention is that even against a sophisticated attack, for instance, where a spoofer attempts to get a user to load their own counterfeit originator identifier to public key mapping, other authenticity checks will reveal inconsistent results and discrepancies to alert the user.

10 These and other objects and advantages of the present invention will become clear to those skilled in the art in view of the description of the best presently known mode of carrying out the invention and the industrial applicability of the preferred embodiment as described herein and as illustrated in the figures of the drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

15

The purposes and advantages of the present invention will be apparent from the following detailed description in conjunction with the appended figures of drawings in which:

FIG. 1 (background art) is a block diagram depicting a representative spoofing scheme.

20 FIG. 2 is a block diagram depicting one anti-spoofing system in an exemplary usage scenario in the context of email.

FIG. 3 is a flowchart showing a representative process for what the user experiences using the anti-spoofing system of FIG. 2.

25 FIG. 4 is a combination block diagram showing elements in an example mark as well as a flow chart showing a decryption process to work with the various data in the mark.

FIG. 5 is a block diagram depicting another anti-spoofing system in a usage scenario, here in a more general messaging context.

FIG. 6 is flow chart showing a process to work with a link in a message.

30 In the various figures of the drawings, like references are used to denote like or similar elements or steps.

BEST MODE FOR CARRYING OUT THE INVENTION

A preferred embodiment of the present invention is a system for detecting detecting spoofed hyperlinks in messages. As illustrated in the various drawings herein, and
5 particularly in the views of FIG. 2 and 5, embodiments of this invention are depicted by the general reference characters 50 and 150.

FIG. 2 is a block diagram depicting one anti-spoofing system 50 in an exemplary usage scenario in the context of email. In the scenario there are three parties 12 involved: a user 14 whom we are trying to protect, an organization 16 that wants to use email 18 for
10 communications without worrying about spoofing, and a spoofer 20 who sends a spoofed email 22 in an attempt to elicit a response 24 from the user 14 and learn information for inappropriate purposes. For now, we focus on the first two parties 12.

The general idea here is that the organization 16 can send out a conventional email 18 including an authenticity mark (mark 52). The presence of the mark 52 then triggers a piece
15 of trusted software (software 54) running on the local machine of the user 14. And this software 54 is then able to determine whether the mark 52 is authentic and to convey that critical information to the user 14.

The anti-spoofing system 50 thus forewarns the user of possible spoofing. It is, however, also essential to properly instruct the end user to take full advantage of the
20 protective nature of the anti-spoofing system 50. The user 14 needs to recognize that when a message appears to come from a trusted organization 16 (or at least one that has advised that it is using this technology), and when the message does not have the mark 52, then the message should be treated as a spoofed email 22 and ignored, deleted, or reported. The user 14 also needs to be educated that when an email (e.g., potentially still a spoofed email) has a
25 mark 52, it should be inspected with the software 54 to determine whether the putative authenticity mark is a true mark 52 or an imitation. Simply put, messages without any form of mark should immediately be considered bad and messages with those with a mark should be further scrutinized to make sure that the mark in them has not been stolen or spoofed.

One of the important aspects of the anti-spoofing system 50 is the software 54 which
30 helps the user 14 to determine authenticity. Ultimately, the user 14 needs to trust that this software 54 is an effective tool to use against spoofer 20 and spoofed email 22. This means that the software 54 should preferably come from a known and trusted source. This also means that the software 54 should render its verification results to the user 14 in a way that

—7—

the result cannot itself be spoofed or easily forged. In particular, what the software **54** displays on the machine of the user **14** should preferably not look anything like a browser window or like anything that can be emulated by a browser window (since a browser window is the easiest software to use remotely as a front). It is also preferable that the software **54** run on the actual local machine of the user **14**, since it is much easier for a spoofer **20** to provide a link to a remote site if an authenticity check occurs remotely and this can, of course, be arranged to indicate that the spoofed email **22** is authentic.

How the authenticity checking software **54** is installed is up to each organization **16** that deploys the anti-spoofing system **50**. However, standardization can be expected to occur, with multiple organizations **16** adopting the same software. The software **54** then need only be installed once, with other information added easily on the machine of a user **14** on a “per organization” basis for each different organization **16** that the user **14** wants to be able to authenticate. The software **54** can be written in C/C++ to keep its size small and to minimize an installation package that can be downloaded via a secure channel for installation. The entire installation package can also be digitally signed, thus reassuring the organizations **16** adopting the anti-spoofing system **50** of its trustworthiness as well.

The software **54** can run as a “service,” and thus always be running. Once the software **54** is installed the service then begins listening, with a further advantage being that it can be started automatically each time that the machine of the user **14** is rebooted. [Another possibility is that the software **54** is triggered under certain conditions and does not always run. This is not the preferred deployment, but is still a perfectly legitimate one.]

With the software **54** running as a service, it can listen at a well-known port on the machine of the user **14**. Choosing this port should be done carefully, however, to ensure that it is always available for efficient transactional verifications and authentication of incoming messages. This is not too much of a problem, however, given that few services listen on ports of client machines. The specific port selection can also permit limiting access to the local machine of the user **14**, as a further security feature. For example, the service can listen using the non-routable IP address 127.0.0.1. This address cannot be accessed from outside. In fact, because of the way TCP/IP works, even if one knows the port number that the service is listening for at this IP address, another process cannot access that port remotely.

When the software **54** is implemented as a service it can be as a very simple, single task HTTP server that listens for a request to authenticate a mark **52**. Assuming the request is well-formed, the service will then easily process the request and display the results to the user

14. Again, the result preferably is displayed in such a way that only locally running software can provide. For instance, the software can provide a dialog box that scrolls up from the task bar, with a non-rectangular shape.

FIG. 3 is a flowchart showing a representative process 80 for what the user 14 experiences using the anti-spoofing system 50 of FIG. 2. The process 80 starts in a step 82, and in a step 84 the user 14 receives an email 18 including an authenticity mark 52 at their local machine.

In a step 86, formal authentication is initiated. Depending on the particular implementation being employed, the user 14 will either need to manually click on a button or a link to authenticate, or authentication will proceed automatically. To proceed automatically, a “link” to the trusted software 54 can be provided as an HTML tag that is automatically received and processed by the email viewer in the machine of the user 14. This automated approach is convenient because it minimizes the time and effort of the user 14.

In a step 88, in the link-based variation used for the sake of example here, an HTTP GET is activated to a URL of the form: `http://127.0.0.1:port?mark=mark-data`. Here “port” is a well-defined port specifically chosen for the software 54 to use and the “mark-data” includes encrypted data (described presently).

In a step 90, the software 54 running as a service is triggered by the HTTP GET and returns a branded image. The service accordingly processes the mark 52 to determine an analysis result. For this, different organizations can supply their own images specifically for the anti-spoofing system 50 and a particular organization ID can be included in the mark 52 so that the correct image can be returned when more than one choice is possible. The content of the branded image itself is unimportant, since its primary purpose is to satisfy the HTTP GET request. The branded image can, however, be used for additional purposes. For instance, to built user 14 recognition of a trademark of the organization 16.

In a step 92, the software 54 displays its analysis result in the “unforgeable” local window on the machine of the user 14. The user 14 can now simply accept the results (e.g., click on an “OK” button). Of course, a more detailed way to get help can also be provided for when something suspicious is detected.

If the software 54 is not running as a process (e.g., not running as a service or is other software that is not already started), the mark 52 can be passed in an attachment to the email 18. To handle a mark 52 sent in this manner the installed software 54 can be registered for a particular file type (e.g., *.sma for Sigaba Mark of Authenticity), with this being the same as

the file type of the attachment then containing the mark **52**. In this variation, the body of the attachment is the same mark **52** as described above. The user **14** here simply “opens” the attachment, launching the software **54** to read the mark **52** in the attachment. After that, verification proceeds similarly to the link-based approach already described.

5 The process **80** stops in a step **94** after the software **54** has determined the authenticity of the email **18**, or the lack of such. The user **14** may decide to respond to the email **18** or the software **54** may be configured to automatically delete an inauthentic email **18** (i.e., a spoofed email **22**). In sum, the total experience of the user **14** can thus be simplified by displaying verification results and allowing the user **14** to decide whether a message (e.g., an email **18**)
10 is truly authentic.

DETECTING AUTHENTIC MARKS

Having provided the above overview, we now describe how this works in more detail.
15 FIG. 4 is a combination block diagram showing elements in an example mark **52** as well as a flow chart showing a decryption process **100** to work with the various data in the mark **52**.

Turning first to the block diagram portion of FIG. 4, it depicts how the email **18** includes the mark **52**, which in turn, includes an originator identifier (OID **102**), encrypted data **104**, and an integrity checksum **106**.

20 Each organization **16** can have a unique OID **102**, and each will typically create its own unique public/private key pair for encryption and decryption of the encrypted data **104**. The organization **16** provides the users **14** with (1) a copy of the software **54**, if a user **14** does not already have it; (2) its OID **102**; and (3) the particular public key that the organization **16** has designated for message communications. Each user **14** installs the
25 software **54** and stores the OID **102** and respective public key in the registry of their machine (typically) or in a flat file.

The block diagram portion of FIG. 4 also depicts examples of typical encrypted data **104**, here including: a timestamp **108** indicating when the message was encrypted, and thus approximately when it was sent; a “topic” of the message (topic **110**); a salt **112**; and an
30 optional user ID **114**. When the trusted software **54** decrypts the encrypted data **104** it then can use the contents as follows.

The timestamp **108** permits comparison with the clock of the local machine of the user **14**. If the time difference is outside of a certain range, this can be noted in a dialog with

—10—

the user **14**. However, this does not necessarily signify that anything is actually wrong. For example, it may simply be the case that the local clock is incorrect or that the user **14** is looking back at an authentic message received last week. Alternately, if an email **18** has just arrived but the software **54** is telling the user **14** that it was sent weeks ago, the user **14** should become very suspicious. All of this can alert the user **14** be presenting information so that he or she can determine what the problem is.

Next, the topic **110** contained in the mark **52** can be displayed to the user **14** (e.g., in bold or with other emphasis). To gain full benefit of this the user **14** should be educated to compare the topic **110** with the content of the email **18** itself. The topic **110** can be more than merely a conventional email subject. It can be sufficiently detailed enough so that the spoofer **20** cannot provide a spoofed email **22** under the same topic **110**. For example, if the topic **110** is "October 2003 Statement," it would be difficult for a spoofed email **22** that is not a statement to get by, assuming that the user **14** actually compares these, but this is where education comes in.

The salt **112** is essentially conventional, as such is used in the cryptography arts. It is a random number used to strengthen security, and here is more important when end-user identifying data (e.g., the optional user ID **114**) is included.

Including the optional user ID **114** makes an attack by a spoofer **20** significantly more difficult. Unfortunately, it also makes sending an authentic email **18** a little more burdensome as well, since each message is now essentially unique and has to be prepared accordingly. For instance, when the user ID **114** is included, a legitimate organization **16** cannot simply bulk mail emails **18**.

The user ID **114** can be anything from a random number, to a hash of an account number, to an actual account number. In preparation for this, the user ID **114** can be stored in the registry on the machine of the user **14** at the same time that the OID **102** and its public key mapping are downloaded and stored. The software **54** can then automatically compare the value in the registry with the user ID **114** in the mark **52** in an email **18**. If these do not match, the email **18** should be regarded as spoofed.

To send an authentic email **18** the sending organization **16** needs to construct the mark **52** and then include it in the email **18**. If the email **18** is formatted as an HTML message the mark **52** can be hidden in an `` tag (which will also cause the check to happen automatically), or behind a button (which itself can be an image), or as just a regular hyperlink. If the email **18** is formatted as plain text, the link must be included as an actual

URL, but most email clients will convert this to a live link. At worst, the user 14 will have to cut and paste the URL into their browser for execution.

As already noted, a slight complexity in preparing and sending the email 18 is presented by whether the optional user ID 114 is included. When not included, the mark 52 need only be computed once and then included in every email 18 being sent. When included, however, the mark 52 has to be computed once for each user 14, and thus will likely involve some kind of lookup operation to determine the proper data for each of the respective users 14. This data can be based on existing user information (e.g., name, account, etc.), which has the advantage that it does not require any additional storage requirements for the sending organization 16.

Turning now to the flow chart portion of FIG. 4, it summarizes much of what has just been stated. The decryption process 100 starts in a step 120, where an email 18 has been received at the machine of the user 14 and the mark 52 from it has been received by the software 54.

In a step 122, the software 54 extracts the OID 102 from the mark 52, and in a step 124 uses it to try to retrieve an associated key for the organization 16. In a step 126 a determination is made whether a key was retrieved. If not, e.g., if no entry for the OID 102 exists, in a step 128 the user 14 is warned that the present email 18 could be a spoof, altered, or from a legitimate organization 16 but one for which the user 14 has not been setup or correctly registered.

Otherwise, in a step 130 the software 54 decrypts the encrypted data 104, and in a step 132 compares the email 18 with the checksum 106. In a step 134 a determination is made whether there is a match. If not, in a step 136 the user 14 is warned that the present email 18 has been altered.

In a step 138 the software 54 compares the timestamp 108 and in a step 140 a determination is made whether the difference between the timestamp 108 and the clock of the machine of the user 14 are within a preset range. If not, in a step 142 the user 14 is warned of this.

In a step 144 the topic 110 and, optionally, the user ID 114 are displayed to the user 14. The user 14 now has the information that he or she needs to make an informed decision about the email 18. And in a step 146 the process 100 is finished.

There are two broad classes of attacks that the anti-spoofing system 50 can address. The first, most obvious and easiest, is for a spoofer 20 to do what spoofer do now: simply

—12—

send legitimate looking spoofed emails **22**. This approach relies completely on the lack of education by end users **14**. In this case, even when the authenticity checking software **54** is installed it will not be triggered. So the users **14** must be cognizant of this negative indicator, which can be tricky. This comes down to education. If the users **14** expect an authenticity dialog to appear, then they will notice when it does not.

The other class of attack is actually trying to spoof the authenticity mark **52**. Since we know that encrypted data **104** in it cannot be altered due to the power of cryptography (and we here ignore the case where a private key of a legitimate organization **16** is compromised), the only other option for a spoofer **20** is to simply “steal” an existing, valid instance of the mark **52** and to place it into a spoofed email **22**. That is, the only action that the spoofer **20** can take with respect to the mark **52** is to copy it.

In the case of a bulk email send (i.e., no individual identifying data like the user ID **114** is included in the mark **52**), the spoofer **20** merely needs to get a hold of a single valid email **18** from the organization **16** and then copy the mark **52** from it into a spoofed email **22**. But this is where the encrypted data **104** comes in. For one thing, it is likely that the spoofer **20** would need to be able to legitimately decrypt the encrypted data **104** just to see what the topic **110** and even the timestamp **108** are. Getting the public key of the organization **16** for this is not necessarily difficult but generally requires getting to someone who has gotten that key legitimately. Assuming the spoofer **20** can know the topic **110**, the spoofer **20** will then have to craft the spoofed email **22** to come as close to the topic **110** as possible, or else risk raising flags by the end users **14**. And because there is (or should be) a fairly small valid time interval (which is configurable on a per originator basis), the spoofer **20** also needs to act quickly or else the time alarm will go off, again raising suspicion.

When the optional user ID **114** is added, the burden on the spoofer **20** increases considerably more. The spoofer **20** still needs to circumvent the barriers above, but now, even harder, the spoofer **20** has to intercept an email **18** for each user **14** that the spoofer **20** is trying to spoof (and to then map the mark **52** to each email address, etc.). This becomes a much more difficult task. Intercepting one email **18** in the bulk case is not hard and, in fact trivial, if the spoofer **20** is also a valid user **14**, but intercepting an email **18** for each user is likely to be virtually impossible. Hence, if the organization **16** can do it, it is preferred to include the user ID **114** in the mark **52**.

In a typical deployment of the anti-spoofing system **50** a user **14** will likely receive authentic emails **18** from many different source organizations **16**. Therefore, the client

software **54** preferably should to be able to support multiple public keys and their mappings for each different source the organization **16**. An easy way to do this is to make the OID **102** be the broad domain name of the organization **16** (e.g., com.sigaba, edu.mit, etc.), since the goal here is merely to avoid conflicts.

5 An entry in the local registry of the machine of the user **14** can map the OID **102** to the formal name of the sending organization **16**; the public key of that organization **16**; and a timestamp interval alarm. Optionally, other values that can be stored are the user ID **114** by which the user **14** is known to the organization **16**; and a location of a file containing the image data returned for the HTTP GET (when not otherwise present, a default branded image
10 can be used). The OID **102** is included in the mark **52** in the clear (perhaps as a separate HTTP query parameter to separate it from the encrypted data).

Before a user **14** can know whether an email **18** is authentic they must have installed the public key (at least) of the sending organization **16**. When an OID mapping in the registry of the machine of the user **14** is used, as described above, an easy way to do this is to create a
15 new file type (.acd -- Authenticity Checking Data) and to associate this with the software **54** (the installation process can make this association). A sending organization **16** can then simply host a file of this type somewhere on their web site (e.g., on an SSL protected page, so that the file is only obtainable via HTTPS). When the user **14** clicks on a link that causes this file to be downloaded, the trusted software **54** receives and process that file. The software **54**
20 merely needs to open the file, verify the integrity (perhaps checking a signature chaining back to a VERISIGN (TM) certificate) and makes the entries in the registry.

One problem with associating a file type, however, is that it becomes easy for a spoofer **20** to email a file of the same file type and override a legitimate OID **102** with a bogus one. Therefore, a safer alternative is to force the user **14** to go through the trusted
25 software **54** in order to get the data. For example, the user **14** could right click on the taskbar icon and select something like "Import new authenticity data." This would prompt for a URL (which could be cut and pasted from an email or a web site). The software **54** can then make an SSL connection to the web site and download the file directly. The software **54** can also compare the name in the SSL certificate with the OID data to make sure they match up. This
30 will prevent a spoofer **20** from overriding or masquerading as a legitimate originator.

From a completeness perspective, the user **14** should also be able to list all authenticity data and to delete entries that are no longer wanted. Additionally, this approach can support each sending organization **16** setting a preferred window for the timestamp

alarm. Designers of embodiments of the anti-spoofing system **50** will also typically want to allow users **14** to override the time interval since different users **14** use email differently. In this case, if an override value is set, it can override all other values.

5

DETECTING SPOOFED HYPERLINKS

An alternative to authenticating the entire message (e.g., the email **18** containing the mark **52**) is to simply authenticate an embedded link within a message at the point that the link is activated by the user **14**, and to notify the user **14** appropriately.

10

FIG. 5 is a block diagram depicting another anti-spoofing system **150** in a usage scenario, here in a more general messaging context. This is similar to the anti-spoofing system **50** in FIG. 2 in many respects, and the same references are therefore used where appropriate. The general idea here is that the organization **16** can provide a message **152** that includes one or more authenticity links **154** to the user **14**, and when the spoofer **20** here provides a spoofed message **156** (including one or more spoofed conventional links) in an attempt to mislead the user **14** the anti-spoofing system **150** can detect this. The message **152** here may be the same as the email **18** with the mark **52**, as already discussed, but may be more generalized, e.g., an instant message (IM) or a link at a web site. The presence of the link **154** in the message **152** here triggers a piece of trusted software (software **158**) running on the local machine of the user **14**, which is able to determine whether the link **154** authentic and conveys that information to the user **14**.

15

20

25

Much as already described for the email **18** and the mark **52**, the organization **16** here constructs its message **152** and includes one or more links **154** in it. If the message **152** is to be in HTML, a link **154** can be hidden in an `` tag (which can also cause checking to proceed automatically), or behind a button (which can be an image) or as just a regular link. If the message **152** is to be in plain text, the link **154** can be included as an actual URL, and the machine of the user **14** can convert the link **154** to a live link. At worst, the user **14** here has to cut and paste the link **154** as a URL into their browser for execution. In all of these cases, the software **158** processes the link **154**.

30

The basic concept here is that when the link **154** is activated, the user **14** is notified via a (passing) dialog whether the link **154** was “signed” by the organization **16** that provided the message **152**. If the user **14** does not see a familiar indicator dialog that they have come to expect, through education, they should then regard the link as counterfeit and unrelated to the

trusted organization 16.

The experience of the user 14 can still be that all of the links 154 in the message 152 appear exactly as they normally would (e.g., hidden by an image or a text label), and all of the links 154 in each message 152 can be protected (as discussed presently), and the user 14 here as well sees an assuring window or dialog displayed on the screen of their machine. This window or dialog can include the name of the organization 16 (which will typically be owner of the key used to decrypt the link 154) and the domain name of the target URL in the link 154. By displaying the owner name, the user 14 should be able to correlate the link 154 with the organization 16 sending of the message 152, and the domain name serves for reassurance and further confirmation purposes.

In many implementations a better experience for the user 14 is to display an animation in a window on their machine that shows, for instance, a logo in motion along with an indication that the link 154 is authentic. Thus, clicking on a link 154 for Bank of XYZ could show a short animation indicating that the link 154, in fact, leads to a Bank of XYZ web site. The organizations 16 might also choose to use an animation and a sound clip (e.g., a sound type trademark).

Each organization 16 can be assigned a unique identifier (e.g., the OID 102 also used in the anti-spoofing system 50) and can create or be assigned its own, unique public/private key pair (key). The organization 16 then provides the users 14 with (1) a copy of the software 158, if a user 14 does not already have it; (2) its OID 102; and (3) the particular public key that the organization 16 has designated for communications of its messages 152.

Authentication of the links 154 embedded in a message 152 here works similar to the authentication of a mark 52 in an email 18 (the approach already described, above). The software 158 can again be a simple HTTP proxy process that listens at IP address 127.0.0.1 on some well-known port. Each authentic link 154 in a message 152 can then be encoded as “http://127.0.0.1:port?o=oid&t=encoded-url” where “oid” is a clear text string representing the originator ID (OID 102) and the “encoded-url” is the target URL, encrypted and URL-encoded. The encoded URL is encrypted with the private key of the originating organization 16, and the public key is distributed to the users 14 in any of various manners. The display animation, discussed above, can also be distributed along with the public key (and thus specifically “branded” to an organization 16). Note that this solution requires no identifying data for the user 14 to be passed outside of their machine.

FIG. 6 is flow chart showing a process 200 to work with a link 154 in a message 152.

The process **200** starts in a step **202**, where the user **14** has in some manner received the message **152** on their local machine.

In a step **204**, the user **14** clicks on the link **154** in the message **152**, and query parameters (“http://127.0.0.1:2099?o=SomeBank.com&t=A9B76...E77”) are passed to the software **158** (e.g., via the web browser the user **14** is using to view the message **152**; here, for instance, the software **158** is a simple HTTP proxy server listening at IP address 127.0.0.1 and port 2099, the OID **102** is “SomeBank.com,” and “A9B76...E77” is the still encrypted URL for Somebank).

In a step **206**, the software **158** starts to process the query parameters. The OID **102** is looked up, to get the public key and success animation (or video, image, sound, etc.) (for Somebank, in this hypothetical example).

In a step **208**, a determination is made if the OID **102** is present. If not, in a step **210** the process **200** returns an HTML page indicating that the OID **102** is unknown, and therefore that the connection to the URL should not be trusted or cannot be completed. Information can also be shown as to how to get the OID **102** loaded.

Otherwise, in a step **212**, the public key of the organization **16** is used to decrypt and integrity check the encoded URL (taken from the link **154**).

In a step **214** a determination is made if there is an integrity problem in the decrypted information from the link **154**. If there is, in a step **216** the process **200** returns an HTML page saying that the link **154** has been altered.

Otherwise, in a step **218**, the checks are successful and the confirming success animation is presented in an authentication window. Concurrently, the process **200** can redirect the browser of the user **14** to the now decoded URL from the link **154** by returning a HTTP 302 command (Location changed -- redirect).

In a step **220**, after 30 seconds or when the user **14** manually closes it, the authentication window automatically goes away, and in a step **222** the process **200** is finished

Alternatively, instead of encrypting the URL of the organization **16** in the link **154**, the organization **16** can simply digitally sign it and include a clear version of it in a list of parameters as the URL in the message **152**. In this case, the trusted software **158** verifies (instead of just decrypting) the signature on the target link **152**.

While various embodiments have been described above, it should be understood that they have been presented by way of example only, and not limitation.

INDUSTRIAL APPLICABILITY

5 The present invention, as shown herein by the exemplary anti-spoofing systems **50**, **150**, is well suited for application in electronic communications of e-mail, other message types, of files, and other information, and thus concurrently providing both high security and high ease of use.

 As has been discussed, the invention protects users **14** with multiple layers of
10 decryption to authenticate the marks **52** in emails **18** or the links **154** embedded in messages **152**.

 A spoofer **20** can try to attack by forging a spoofed email **22** or a spoofed message **156** that do not have the authenticated mark **52** or links **154** (i.e., that has regular links), in the manner presently most commonly used type of spoofing attack. In this scenario, however, the
15 only means of infiltrating the anti-spoofing systems **50**, **150** is through human error. This approach necessarily relies completely on the users **14** being both unsuspecting and ignorant of how the anti-spoofing systems **50**, **150** work. In this case, even when the software **54**, **158** is installed, it will not be triggered. The user **14** must be cognizant of this negative indicator, an absence of a result window, but this requires only a small amount of education. Once a
20 user **14** expects an authenticity dialog window to appear, they will take notice when one does not.

 Alternately, a spoofer **20** can try to attack by attempting to include some valid links in a spoofed email **22** or a spoofed message **156** and some invalid (regular) links, hoping that the user will not notice that only some of the links seem to work. Once implemented,
25 however, the fundamental concepts of education and comprehension of the anti-spoofing systems **50**, **150** will protect against this, and the user **14** releasing confidential information in a response **24**.

 A spoofer **20** cannot alter a mark **52** or a link **154** that is encrypted. The spoofer **20** can attempt to get the user **14** to load their own counterfeit OID to public key mapping, but a
30 counterfeit public key is counterproductive because other authenticity checks would reveal inconsistent results and discrepancies, as described above. It thus is not clear spoofers **20** could attain any advantage, especially if organizations **16** control their OIDs **102** by encryption with private keys known only to the organizations **16**, and possibly embedding the

corresponding public key into the software **54, 158** so that authenticity data for a new OID **102** can be checked.

Alternatively, a spoofer **20** try to could copy the same image/animation and correlate that with a counterfeit OID to make a mark **52** or a link **154** appear valid. To address this
5 issue, all possible DNS names for links that would correspond to an image could be listed and an attachment of the list would be coupled into an encrypted package. For example, valid domains (e.g., bankofXYZ.com) could include the image itself in an encrypted package. Before the image is displayed, the software then verifies that the target of the link is one of the names listed with the image. This prevents the image from being hijacked.

10 Accordingly, to provide the noted and other advantages, the present invention may now be implemented by those of reasonable skill in the art, creating embodiments using existing technologies if desired, and then the invention may be used by individuals and organizations with ordinary skills and aptitudes.

15 For the above, and other, reasons, it is expected that the anti-spoofing systems **50, 150** of the present invention will have widespread industrial applicability. Therefore, it is expected that the commercial utility of the present invention will be extensive and long lasting.

IN THE CLAIMS

What is claimed is:

- 1 1. A computer program, embodied on a computer readable storage medium, for assisting a
2 user to determine whether an email comes from a purported originator, the computer program
3 comprising:
 - 4 a code segment that determines with a computerized system whether the email
5 includes an authenticity mark including an originator identifier and encrypted
6 data;
 - 7 a code segment that decrypts said encrypted data based on said originator identifier,
8 into decrypted data;
 - 9 a code segment that presents to the user on a display unit:
10 whether the email includes said authenticity mark;
11 whether said encrypted data decrypts successfully; and
12 information based on said authenticity mark and said decrypted data.

- 1 2. The computer program of claim 1, wherein the computer program is digitally signed.

- 1 3. The computer program of claim 1, wherein said code segment that determines runs as a
2 service in said computerized system.

- 1 4. The computer program of claim 1, wherein said code segment that determines includes a
2 hypertext transport protocol (HTTP) server.

- 1 5. The computer program of claim 1, wherein said code segment that determines listens at a
2 port in said computerized system for a request for hypertext markup language (HTML)
3 content and extracts said authenticity mark from a uniform resource locator (URL) link
4 requesting said HTML content.

- 1 6. The computer program of claim 1, wherein said code segment that presents further
2 presents information to the user based on said originator identifier.

- 1 7. The computer program of claim 6, further comprising a code segment that matches said
2 originator identifier to one of a plurality of registered originators maintained in a storage unit,

3 to retrieve a decryption key associated with said originator identifier for use by said code
4 segment that decrypts.

1 8. The computer program of claim 1, wherein:

2 said code segment that determines compares a checksum from said authenticity mark
3 against contents of the email; and

4 said code segment that presents further presents to the user information based on said
5 checksum.

1 9. The computer program of claim 1, wherein said code segment that decrypts employs a
2 public key of said purported originator.

1 10. The computer program of claim 1, wherein:

2 said code segment that decrypts extracts at least one of a timestamp, a topic, and a
3 user identifier from said encrypted data; and

4 said code segment that presents further presents to the user information based on at
5 least one of said timestamp, said topic, and said user identifier.

1 11. The computer program of claim 10, further comprising a code segment that compares
2 said timestamp to preset timeliness criteria; and wherein said code segment that presents
3 emphasizes said information based on said timestamp when said timeliness criteria are
4 deviated from.

1 12. The computer program of claim 1, wherein said code segment that presents employs a
2 dialog box that only software running locally in said computerized system can provide,
3 thereby avoiding confusion with a remotely generated browser window.

1 13. A system for assisting a user to determine whether an email comes from a purported
2 originator, the system comprising:

3 a computerized system having a display unit;

4 a logic in said computerized system that determines whether the email includes an
5 authenticity mark including an originator identifier and encrypted data;

—21—

6 a logic in said computerized system that decrypts said encrypted data based on said
7 originator identifier, into decrypted data;
8 a logic in said computerized system that that presents to the user, on said display:
9 whether the email includes said authenticity mark;
10 whether said encrypted data decrypts successfully; and
11 information based on said authenticity mark and said decrypted data.

1 14. The system of claim 13, wherein said logic in said computerized system that determines
2 runs as a service.

1 15. The system of claim 13, wherein logic in said computerized system that determines
2 includes a hypertext transport protocol (HTTP) server.

1 16. The system of claim 13, wherein said logic in said computerized system that determines
2 listens at a port for a request for hypertext markup language (HTML) content and extracts
3 said authenticity mark from a uniform resource locator (URL) link requesting said HTML
4 content.

1 17. The system of claim 13, wherein said logic in said computerized system that that presents
2 to the user further presents information based on said originator identifier.

1 18. The system of claim 17, further comprising a logic in said computerized system that
2 matches said originator identifier to one of a plurality of registered originators maintained in
3 a storage unit, to retrieve a decryption key associated with said originator identifier for use by
4 said logic in said computerized system that decrypts.

1 19. The system of claim 13, wherein:
2 said logic in said computerized system that determines compares a checksum from
3 said authenticity mark against contents of the email; and
4 said logic in said computerized system that that presents to the user further presents
5 information based on said checksum.

1 20. The system of claim 13, wherein said logic in said computerized system that decrypts
2 employs a public key of said purported originator.

1 21. The system of claim 13, wherein:
2 said logic in said computerized system that decrypts extracts at least one of a
3 timestamp, a topic, and a user identifier from said encrypted data; and
4 said logic in said computerized system that that presents to the user further presents
5 information based on at least one of said timestamp, said topic, and said user
6 identifier.

1 22. The system of claim 13, further comprising a logic in said computerized system that
2 compares said timestamp to preset timeliness criteria; and wherein said logic in said
3 computerized system that that presents to the user emphasizes said information based on said
4 timestamp when said timeliness criteria are deviated from.

1 23. The system of claim 13, wherein said logic in said computerized system that that presents
2 to the user employs a dialog box that only software running locally in said computerized
3 system can provide, thereby avoiding confusion with a remotely generated browser window.

1 24. A method for assisting a user to determine whether an email comes from a purported
2 originator, the method comprising:
3 determining whether the email includes an authenticity mark including an originator
4 identifier and encrypted data;
5 decrypting said encrypted data based on said originator identifier, into decrypted data;
6 presenting to the user:
7 whether the email includes said authenticity mark;
8 whether said encrypted data decrypts successfully; and
9 information based on said authenticity mark and said decrypted data.

1 25. The method of claim 24, wherein said determining includes running a service in a
2 computerized system.

1 26. The method of claim 24, wherein said determining includes running a hypertext transport
2 protocol (HTTP) server.

1 27. The method of claim 24, wherein said determining includes listening at a port in a
2 computerized system for a request for hypertext markup language (HTML) content and
3 extracting said authenticity mark from a uniform resource locator (URL) link requesting said
4 HTML content.

1 28. The method of claim 24, wherein:
2 said determining further includes extracting an originator identifier from said
3 authenticity mark; and
4 said presenting further includes presenting information to the user based on said
5 originator identifier.

1 29. The method of claim 28, further comprising matching said originator identifier to one of
2 a plurality of registered originators and retrieving a decryption key associated with said
3 originator identifier for use in said decrypting.

1 30. The method of claim 24, wherein:
2 said determining includes comparing a checksum from said authenticity mark against
3 contents of the email; and
4 said presenting includes presenting information based on said checksum.

1 31. The method of claim 24, wherein said decrypting employs a public key of said purported
2 originator.

1 32. The method of claim 24, wherein:
2 said decrypting extracts at least one of a timestamp, a topic, and a user identifier from
3 said encrypted data; and
4 said presenting includes presenting information based on at least one of said
5 timestamp, said topic, and said user identifier.

1 33. The method of claim 32, further comprising comparing said timestamp to preset
2 timeliness criteria; and wherein said presenting emphasizes said information based on said
3 timestamp when said timeliness criteria are deviated from.

1 34. The method of claim 24, wherein said presenting employs a dialog box that only
2 software running locally in a computerized system can provide, thereby avoiding confusion
3 with a remotely generated browser window.

1 35. A computer program for assisting a user to determine whether a hyperlink to a target
2 uniform resource locator (URL) is spoofed, the method comprising:

3 a code segment that listens with a computerized system for an activation of the
4 hyperlink;

5 a code segment that extracts an originator identifier and encrypted data from the
6 hyperlink;

7 a code segment that decrypts said encrypted data into decrypted data based on said
8 originator identifier;

9 a code segment that presents information on a display unit;

10 a code segment that redirects; and

11 a code segment that determines whether the hyperlink includes said originator
12 identifier and said encrypted data decrypts successfully, and then:

13 runs said code segment that presents, to present a confirmation of
14 authentication to the user conveying the name of the owner and
15 the domain name of the target URL, and

16 runs said code segment that redirects, to redirect the user to the target
17 URL;

18 and otherwise, runs said code segment that presents, to present a warning
19 dialog to the user.

1 36. The computer program of claim 35, wherein the computer program is digitally signed.

1 37. The computer program of claim 35, wherein said code segment that listens runs as a
2 service in said computerized system.

- 1 38. The computer program of claim 35, wherein said code segment that listens includes a
2 hypertext transport protocol (HTTP) server.
- 1 39. The computer program of claim 35, wherein said code segment that listens listens at a
2 preset non routable internet protocol (IP) address and at a preset port.
- 1 40. The computer program of claim 35, wherein said code segment that decrypts includes a
2 code segment that extracts the target URL from said decrypted data.
- 1 41. The computer program of claim 35, wherein said the hyperlink includes the target URL
2 and said code segment that decrypts includes:
3 a code segment that extracts a digital signature from said decrypted data; and
4 a code segment that verifies said digital signature against said originator identifier.
- 1 42. The computer program of claim 35, wherein said code segment that decrypts employs a
2 public key associated with said originator identifier.
- 1 43. The computer program of claim 35, further comprising:
2 a code segment that matches said originator identifier to one of a plurality of
3 registered originators; and
4 a code segment that retrieves a decryption key associated with said originator
5 identifier for use by said code segment that decrypts.
- 1 44. The computer program of claim 35, wherein said code segment that presents employs a
2 dialog box that only software running locally in said computerized system can provide,
3 thereby avoiding confusion with a remotely generated browser window.
- 1 45. A system for assisting a user to determine whether a hyperlink to a target uniform
2 resource locator (URL) is spoofed, the system comprising:
3 a computerized system having a display unit;
4 a logic in said computerized system that listens for activation of the hyperlink;
5 a logic that extracts an originator identifier and encrypted data from the hyperlink;

6 a logic that decrypts said encrypted data into decrypted data based on said originator
7 identifier;
8 a logic that determines whether the hyperlink includes said originator identifier and
9 that said encrypted data decrypts successfully;
10 a logic responsive to said logic that determines, that presents on said display unit a
11 confirmation of authentication conveying the name of the owner and the
12 domain name of the target URL and that redirects the user to the target URL;
13 and
14 a logic responsive to said logic that determines, that presents on said display unit a
15 warning dialog to the user.

1 46. The system of claim 45, wherein said logic that listens runs as a service.

1 47. The system of claim 45, wherein logic that listens includes a hypertext transport protocol
2 (HTTP) server:

1 48. The system of claim 45, wherein said logic that listens listens at a preset non routable
2 internet protocol (IP) address and at a preset port.

1 49. The system of claim 45, wherein said logic that decrypts includes a logic that extracts the
2 target URL from said decrypted data.

1 50. The system of claim 45, wherein said the hyperlink includes the target URL and said
2 logic that decrypts includes:
3 a logic that extracts a digital signature from said decrypted data; and
4 a logic segment that verifies said digital signature against said originator identifier.

1 51. The system of claim 45, wherein said logic that decrypts employs a public key associated
2 with said originator identifier.

1 52. The system of claim 45, further comprising:
2 a logic that matches said originator identifier to one of a plurality of registered
3 originators; and

—27—

4 a logic that retrieves a decryption key associated with said originator identifier for use
5 by said logic that decrypts.

1 53. The system of claim 45, wherein said logic that presents employs a dialog box that only
2 software running locally in said computerized system can provide, thereby avoiding
3 confusion with a remotely generated browser window.

1 54. A method for assisting a user to determine whether a hyperlink to a target uniform
2 resource locator (URL) is spoofed, the method comprising:
3 listening for an activation of the hyperlink;
4 extracting an originator identifier and encrypted data from the hyperlink;
5 decrypting said encrypted data into decrypted data based on said originator identifier;
6 when the hyperlink includes said originator identifier and said encrypted data decrypts
7 successfully:
8 presenting a confirmation of authentication to the user, wherein said
9 confirmation of authentication conveys the name of the owner and the
10 domain name of the target URL; and
11 redirecting the user to the target URL;
12 and otherwise, presenting a warning dialog to the user.

1 55. The method of claim 54, wherein said listening includes running at least one of a service
2 and a hypertext transport protocol (HTTP) server in a computerized system.

1 56. The method of claim 54, wherein said listening is at a preset non routable internet
2 protocol (IP) address and a preset port.

1 57. The method of claim 54, said decrypting includes extracting the target URL from said
2 decrypted data.

1 58. The method of claim 54, wherein said the hyperlink includes the target URL and said
2 decrypting includes:

3 extracting a digital signature from said decrypted data; and
4 verifying said digital signature against said originator identifier.

- 1 59. The method of claim 54, further comprising:
2 matching said originator identifier to one of a plurality of registered originators;
3 retrieving a decryption key associated with said originator identifier for use in said
4 decrypting.
- 1 60. The method of claim 54, wherein said presenting a confirmation employs a dialog box
2 that only software running locally in a computerized system can provide, thereby avoiding
3 confusion with a remotely generated browser window.

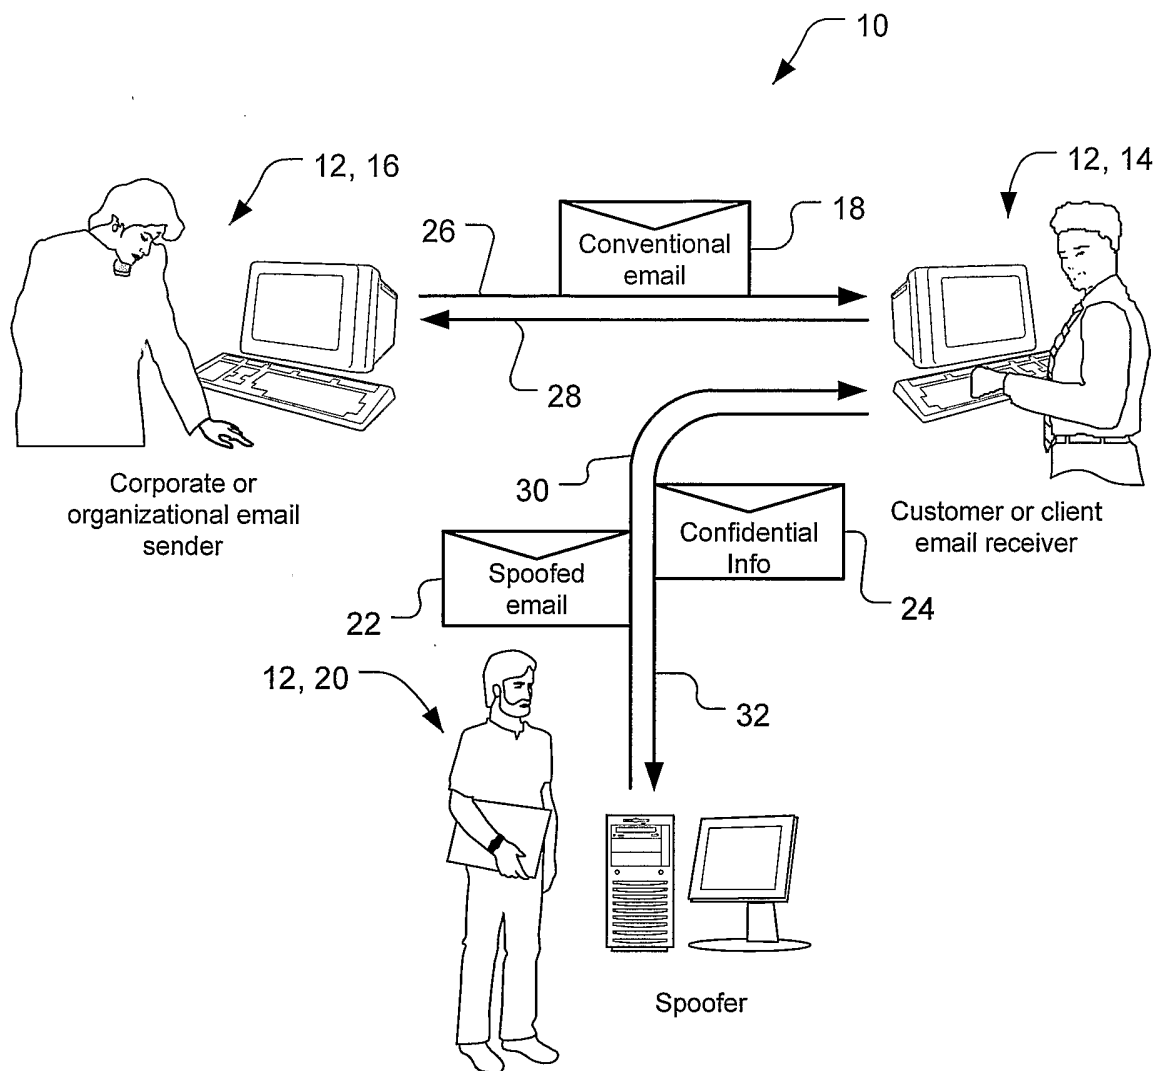


FIG. 1 (background art)

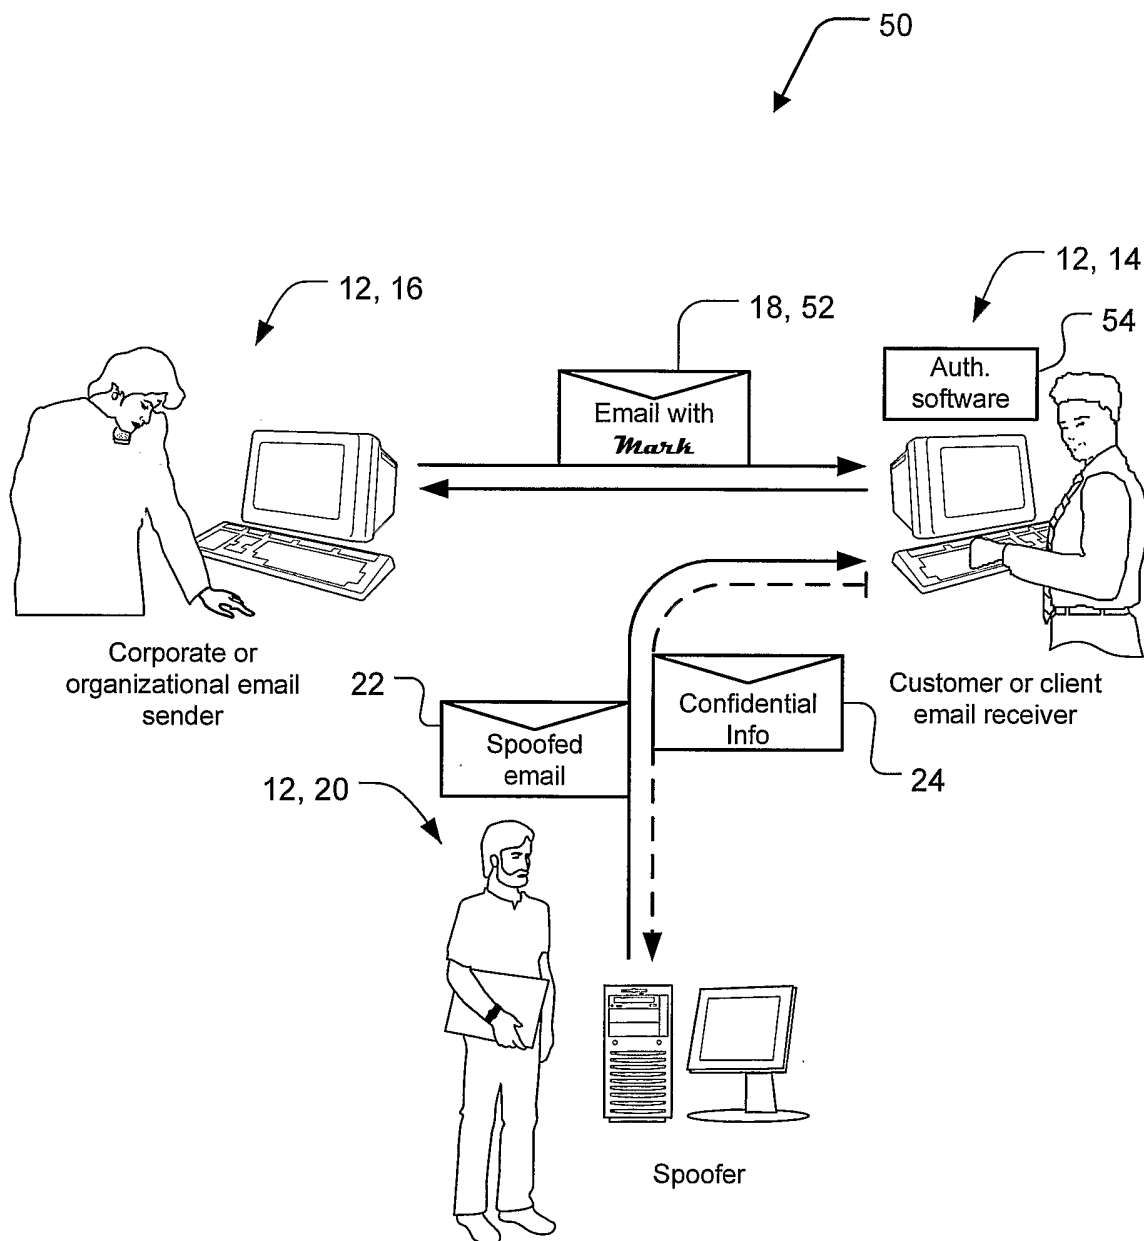


FIG. 2

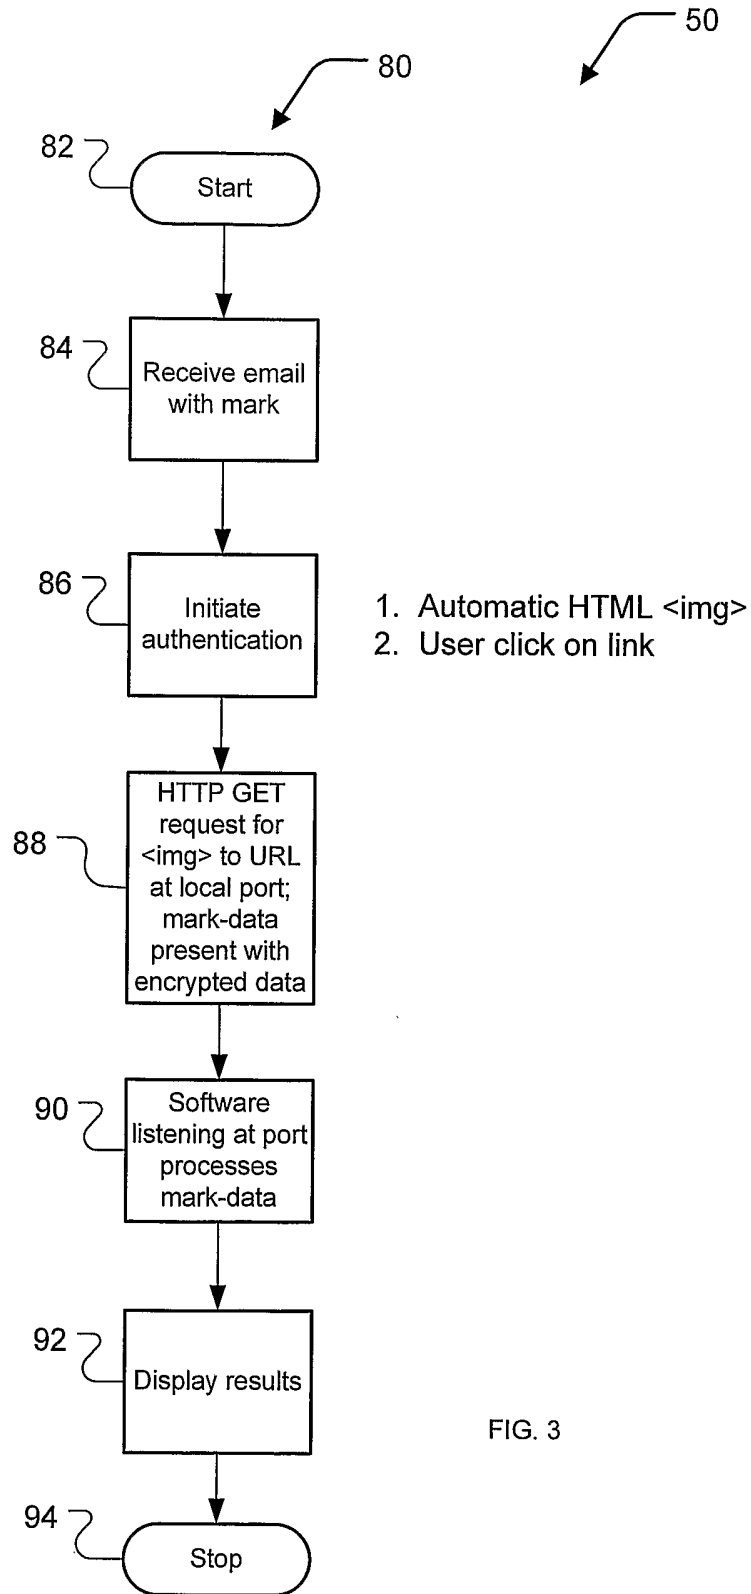


FIG. 3

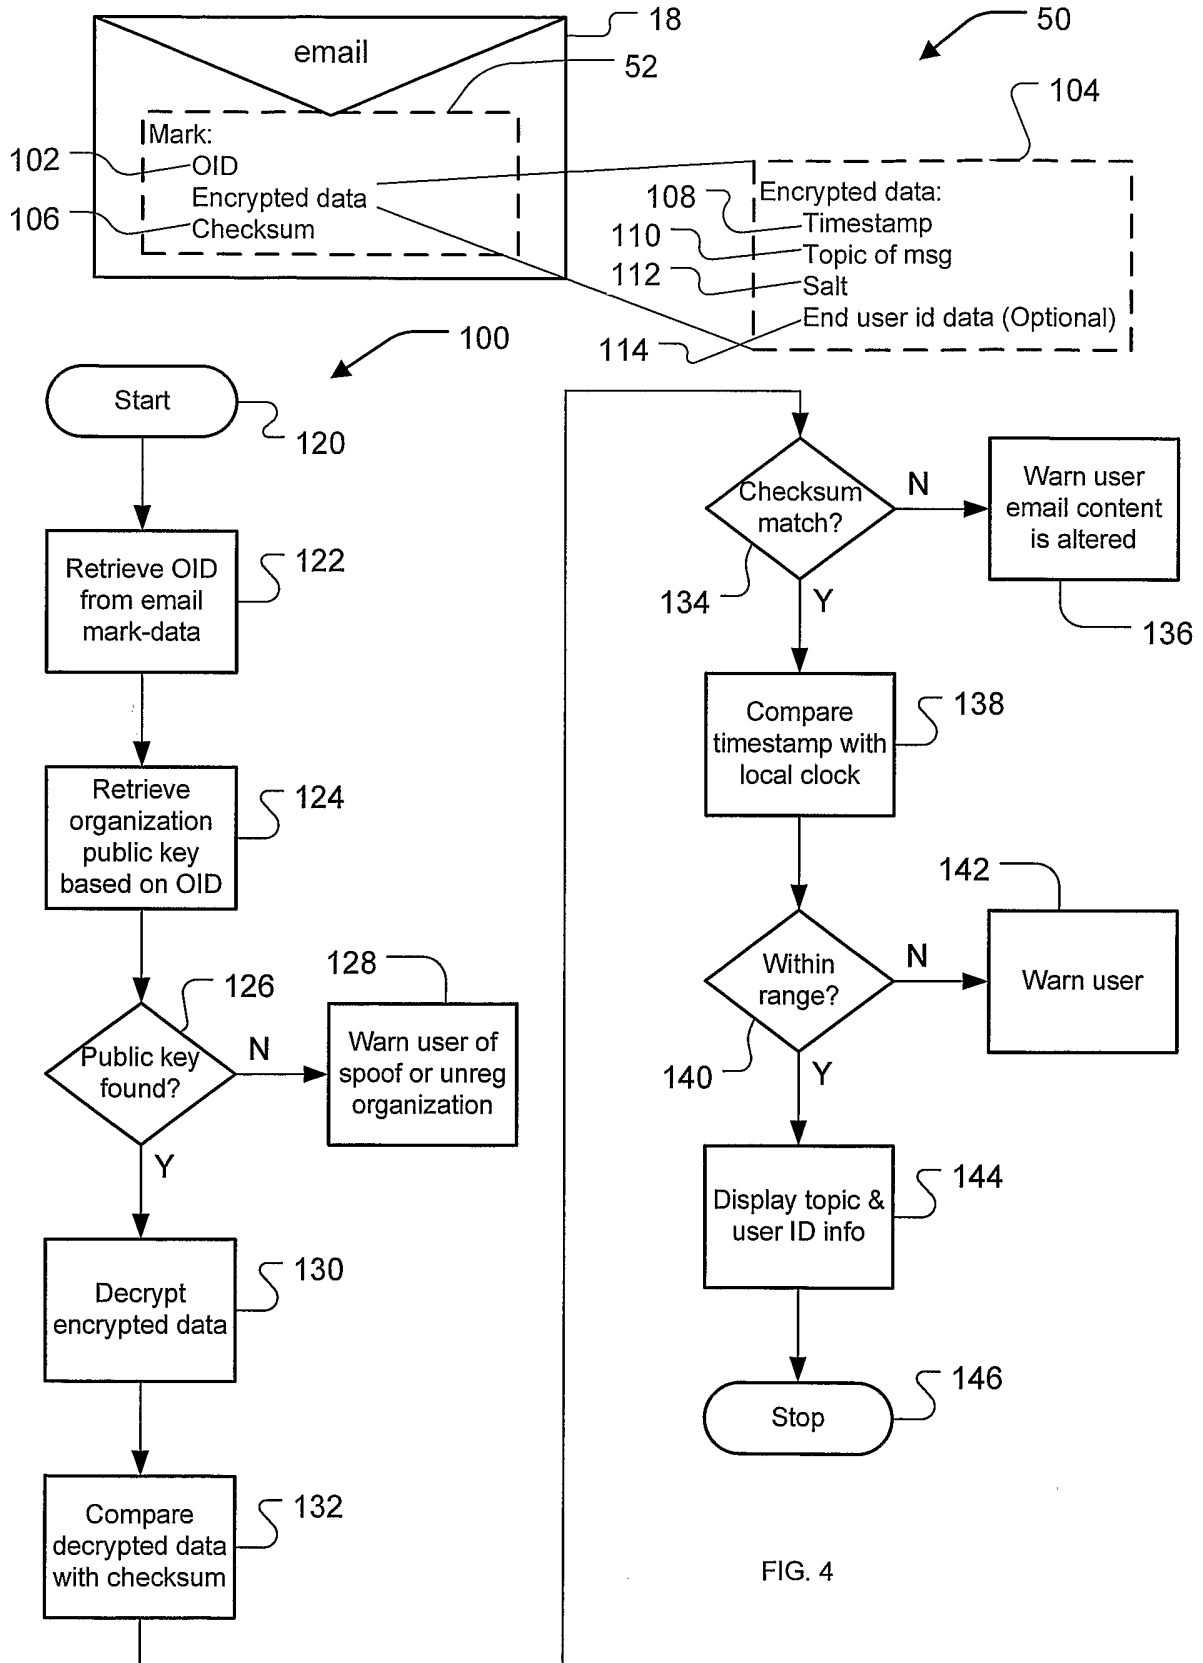


FIG. 4

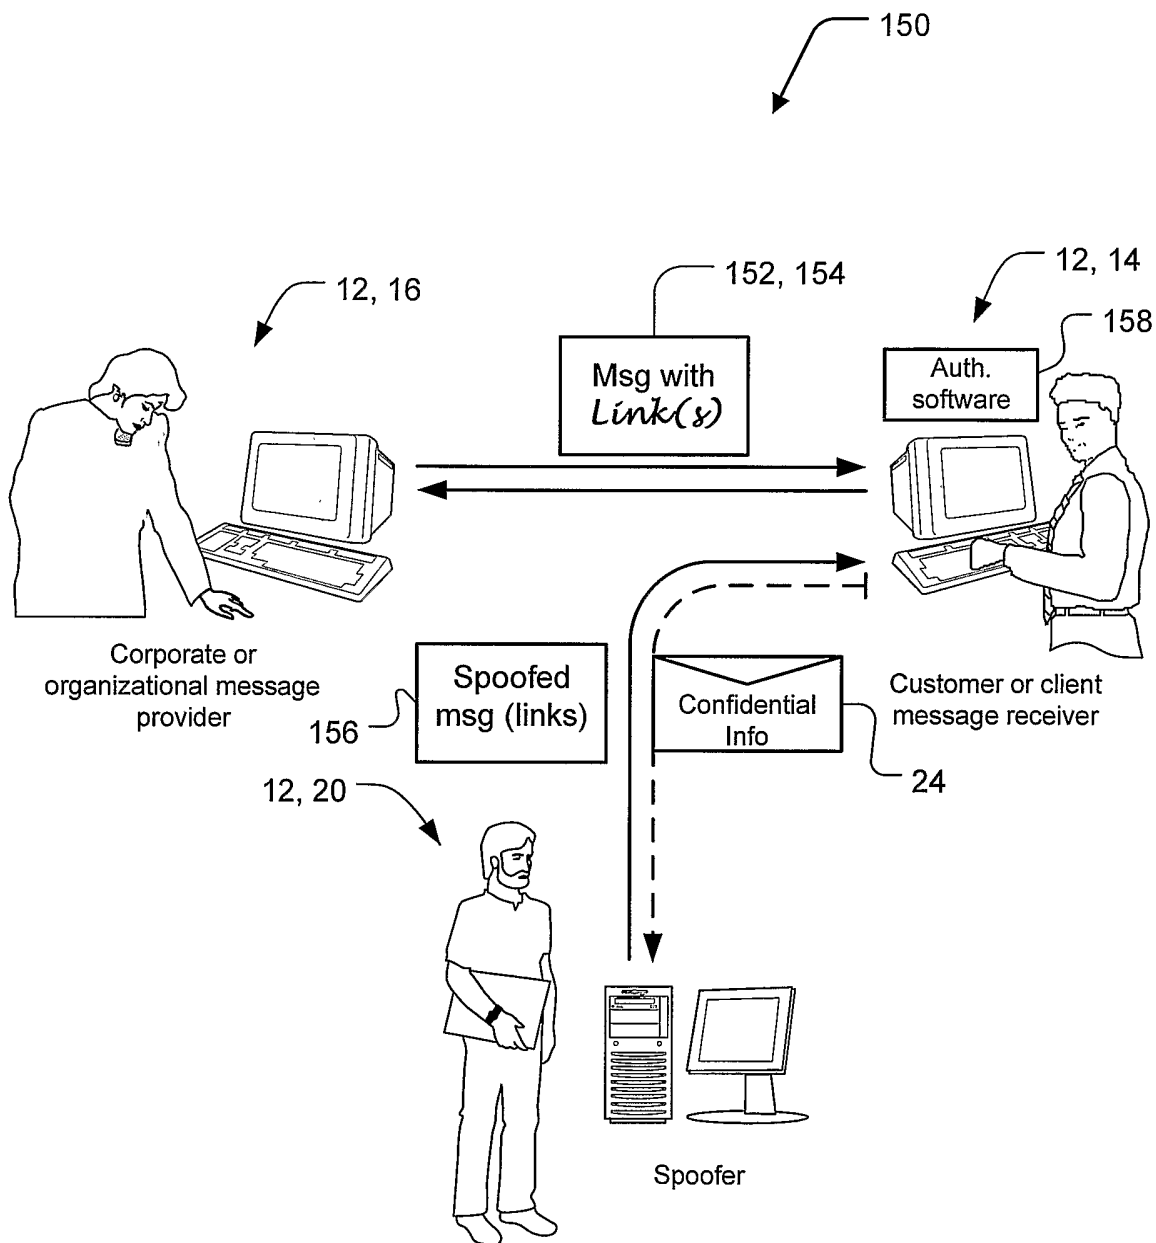


FIG. 5

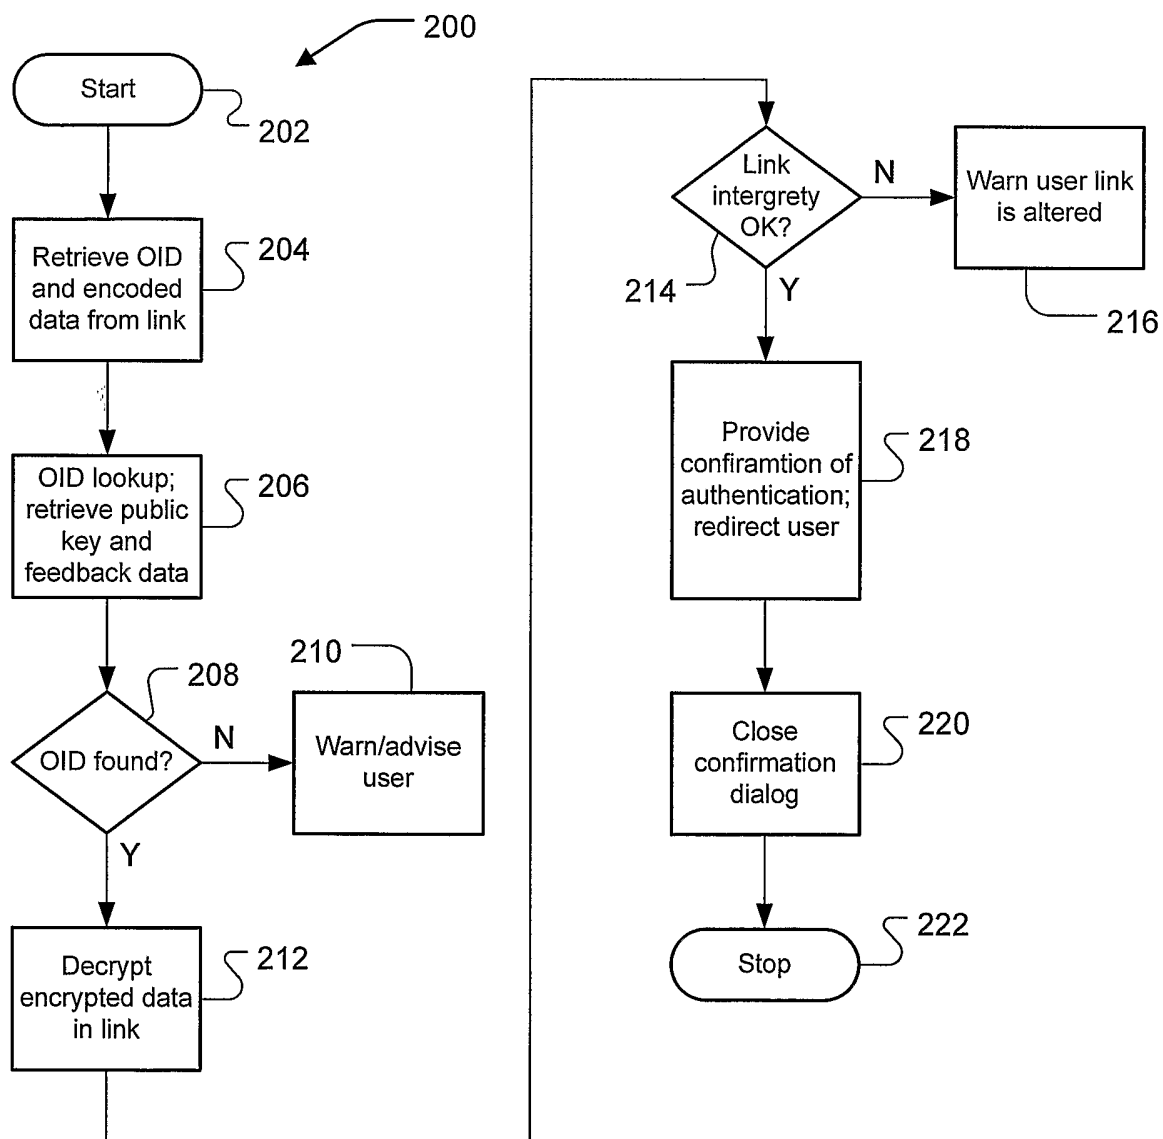


FIG. 6