



(43) International Publication Date
8 October 2015 (08.10.2015)

- (51) International Patent Classification:
G06F 3/048 (2013.01) G06Q 10/10 (2012.01)
- (21) International Application Number:
PCT/US2015/022609
- (22) International Filing Date:
26 March 2015 (26.03.2015)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
61/973,111 31 March 2014 (31.03.2014) US
14/461,275 15 August 2014 (15.08.2014) US
- (71) Applicant: MICROSOFT TECHNOLOGY LICENSING, LLC [US/US]; One Microsoft Way, Redmond, Washington 98052-6399 (US).
- (72) Inventors: MASTERSON, Joseph; c/o Microsoft Technology Licensing, LLC, LCA - International Patents (8/1172), One Microsoft Way, Redmond, Washington 98052-6399 (US). DE SOUZA, Jeremy; c/o Microsoft Technology Licensing, LLC, LCA - International Patents (8/1172), One Microsoft Way, Redmond, Washington 98052-6399 (US). MA, Jin; c/o Microsoft Technology Licensing, LLC, LCA - International Patents (8/1172), One Microsoft Way, Redmond, Washington 98052-6399 (US). CATRINESCU, Elena; c/o Microsoft Technology Licensing, LLC, LCA - International Patents (8/1172), One Microsoft Way, Redmond, Washington 98052-6399 (US). WADDOUPS,

Nathan; c/o Microsoft Technology Licensing, LLC, LCA - International Patents (8/1172), One Microsoft Way, Redmond, Washington 98052-6399 (US). FERN, Kenneth; c/o Microsoft Technology Licensing, LLC, LCA - International Patents (8/1172), One Microsoft Way, Redmond, Washington 98052-6399 (US). MEYERS, David Lloyd, Jr.; c/o Microsoft Technology Licensing, LLC, LCA - International Patents (8/1172), One Microsoft Way, Redmond, Washington 98052-6399 (US). LIMONT, David Paul; c/o Microsoft Technology Licensing, LLC, LCA - International Patents (8/1172), One Microsoft Way, Redmond, Washington 98052-6399 (US). PALMER, Michael B.; c/o Microsoft Technology Licensing, LLC, LCA - International Patents (8/1172), One Microsoft Way, Redmond, Washington 98052-6399 (US).

- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,

[Continued on next page]

(54) Title: IMMERSIVE DOCUMENT INTERACTION WITH DEVICE-AWARE SCALING

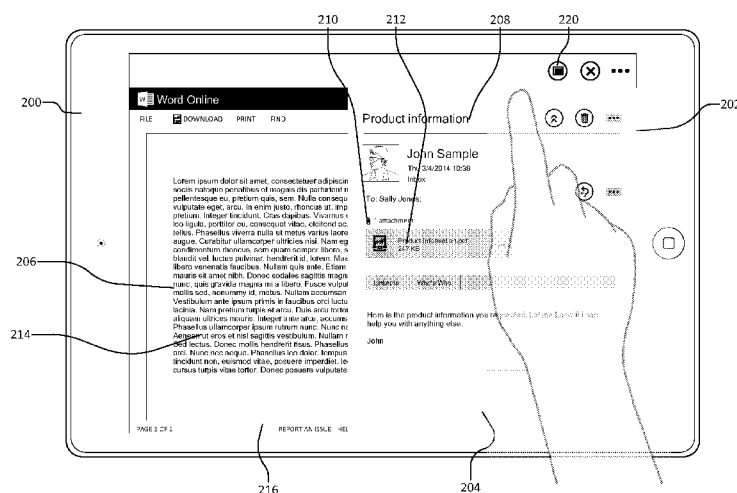


Fig. 2D

(57) Abstract: An adaptive layout and workflow engine. The adaptive layout and workflow engine allows various applications to dynamically render scaled views of content based on the characteristics of the display on the device being used to consume the content. The adaptive layout and workflow engine may select an appropriate view of the content to render based on the size, resolution, or aspect ratio of the display. The rendered size of the content and/or the user interface of the content application is evaluated relative to the characteristics of the display. Embodiments may provide different controls via the user interfaces based on the characteristics of the display and/or content. The adaptive layout and workflow engine may provide customized work flows via the user interface to improve the user experience depending on the display capabilities of the device used to consume the content.

WO 2015/153247 A1

TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

— *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

Published:

— *with international search report (Art. 21(3))*

Declarations under Rule 4.17:

— *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*

IMMERSIVE DOCUMENT INTERACTION WITH DEVICE-AWARE SCALING**BACKGROUND**

5 [0001] Users frequently work with multiple forms of content, such as email and documents, to communicate relevant information. Many tasks involve using both forms of content together. Conventional solutions generally treat the two forms of content as separate items requiring manual, and often inefficient, manipulation of the items and/or the information contained therein together to complete the task. For example, in a conventional work flow to edit an email attachment and return it to the sender, the user
10 must download the attachment, perform the edits using the appropriate software application, compose a new email message, locate and attach the edited attachment to the new email message, and send the new email message. Efficiency varies depending on the device being used to complete the workflow due to differences in the capabilities, such as display capabilities, of different devices.

15 [0002] It is with respect to these and other considerations that the present invention has been made. Although relatively specific problems have been discussed, it should be understood that the aspects disclosed herein should not be limited to solving the specific problems identified in the background.

BRIEF SUMMARY

20 [0003] This summary is provided to introduce a selection of concepts in a simplified form that are further described below in the Detailed Description section. This summary is not intended to identify key features or essential features of the claimed subject matter, nor is it intended to be used as an aid in determining the scope of the claimed subject matter.

25 [0004] Aspects of a system for immersive document interaction with device-aware scaling include an adaptive layout and workflow engine to dynamically render scaled views of content based on the display capabilities/configuration of the device being used to consume the content. The adaptive layout and workflow engine is in communication with one or more applications used to view, generate, and edit content items. The content
30 provided by the applications may include compound content. Compound content includes a primary content item (i.e., a container) carrying, or otherwise associated with, one or more attached or embedded content items (i.e., attachments). When a user interacts with an attachment using an application associated with the system, the adaptive layout and workflow engine collects information about the device requesting the attachment. Based

on the display capabilities, for example, the aspect ratio of the device, the adaptive layout and workflow engine selects a default layout for presenting the attachment to the user.

[0005] Devices with constrained displays, such as having small aspect ratios and/or small physical sizes, may not be well suited for simultaneously displaying the attachment and the container. In such cases, the default layout automatically selected by the adaptive layout and workflow engine may be a full screen layout presenting only the attachment. Other layouts may be available to be manually selected by the user, such as, but not limited to, a side-by-side layout and other multiple region layouts. On the other hand, for devices with more generous display capabilities, such as large aspect ratios, multiple displays, and/or large physical displays, the default layout automatically selected by the adaptive layout and workflow engine may be a side-by-side layout and other multiple region layouts may be considered suitable for simultaneously displaying the attachment and the container.

[0006] The adaptive layout and workflow engine may also provide adaptive workflows via the user interface based on the display capabilities of the device used to consume the content, and, optionally, the nature of the content and/or the actions taken by the user. The adaptive workflows provide context-sensitive task controls that allow the user to perform sequences of actions incorporating information from the compound content in ways that minimize limitations resulting from constrained displays. The context-sensitive task controls initiate task sequences that allow the user to focus on substantively working with the content rather than logistically managing the individual content items and switching between various applications to initiate multiple actions (e.g., load, save, edit, create, reply, or send) involved in completing the substantive task, which may be especially inefficient or unnecessarily complicated or difficult on devices with constrained displays.

BRIEF DESCRIPTION OF THE DRAWINGS

[0007] Further features, aspects, and advantages of the present disclosure will become better understood by reference to the following figures, wherein elements are not to scale so as to more clearly show the details and wherein like reference numbers indicate like elements throughout the several views:

Figure 1 is a system diagram illustrating aspects of a system for immersive document interaction with device-aware scaling;

Figures 2A-2D illustrate aspects of a user interface provided by the system allowing a user to selectively display an email and its attachments in various views rendered optimized for a device with a width constrained display;

Figures 3A and 3B illustrate aspects of a user interface provided by the system
5 allowing a user to selectively display an email and its attachments in various views rendered optimized for a device with a large aspect ratio display;

Figures 4A-4F illustrate aspects of a user interface implementing a customized workflow implemented by the system to provide the user with an immersive interactive experience that lets the user focus on performing substantive work instead trying to
10 navigate through the ministerial functions associated with the task on the device with the width constrained display;

Figures 5A-5C illustrate aspects of a user interface implementing a customized workflow implemented by the system to provide the user with an immersive interactive experience that lets the user focus on performing substantive work instead trying to
15 navigate through the ministerial functions associated with the task on the device with the large aspect ratio display;

Figure 6 is a high level flowchart showing aspects of the method for providing immersive document interaction with device-aware scaling;

Figure 7 is a simplified block diagram of an architecture for a computing device
20 with which aspects of the invention may be practiced;

Figure 8A illustrates a mobile computing device with which aspects of the invention may be practiced;

Figure 8B is a simplified block diagram of an architecture for a mobile computing device with which aspects of the invention may be practiced; and

Figure 9 is a simplified block diagram of a distributed computing system for
25 practicing aspects of the invention.

DETAILED DESCRIPTION

[0008] Various aspects of the invention are described more fully below with reference to the accompanying drawings, which form a part hereof, and which show
30 specific exemplary embodiments. However, embodiments may be implemented in many different forms and should not be construed as limited to the embodiments set forth herein; rather, these embodiments are provided so that this disclosure will be thorough and complete, and will fully convey the scope of the embodiments to those skilled in the art. Embodiments may be practiced as methods, systems, or devices. Accordingly,

embodiments may take the form of a hardware implementation, an entirely software implementation or an implementation combining software and hardware aspects. The following detailed description is, therefore, not to be taken in a limiting sense.

[0009] Aspects of a system for immersive document interaction with device-aware scaling are described herein and illustrated in the accompanying figures. The system includes an adaptive layout and workflow engine to dynamically render scaled views of content based on the display capabilities/configuration of the device being used to consume the content. The system may select an appropriate view of the content to render based on the size, resolution, or aspect ratio of the display. The rendered size of the content and/or the user interface of the content application may be evaluated relative to the display capabilities. Embodiments may provide different controls via the user interface based on the type of device, the display capabilities, and/or the task context. The system may also provide customized work flows via the user interface to improve the user experience depending on the type of device, the display capabilities, and/or the task context.

[0010] Figure 1 is a system diagram illustrating aspects of a system for immersive document interaction with device-aware scaling. The system **100** includes an aspect ratio aware layout and workflow engine **102** in communication with one or more applications **104** used to view, generate, and edit content items. Examples of suitable applications include, but are not limited to, word processing, spreadsheet, database, slide presentation, electronic mail, drawing, web browser, media player, and game applications.

[0011] In the illustrated embodiment, the system is a distributed system operating in a network computing environment. In the distributed system, the adaptive layout and workflow engine **102** and/or the application(s) **104** may run on a server **106** and communicate with a user agent **108** via a network **110**, such as, but not limited to, the Internet, an intranet, a local area network, or a wide area network. The user agent provides a user interface that allows a user **112** to interact with the content provided by the applications **104**. The user interface is displayed on a display of a client device **114** running the user agent.

[0012] The server and client device may be computing devices, such as, but not limited to, server or desktop computers **114a**, laptops **114b**, tablet computers **114c**, smartphones **114d**, smart watches, and smart appliances. In the distributed system, the applications serving the content to the user agent may not be aware of the display capabilities of the client device being used to interface with the content. One non-limiting

example of a distributed system is a web-based office application suite that provides communication using email or other messaging technologies (e.g., instant messaging or texting) and viewing/editing of multiple office application document types.

[0013] The content **116** provided by the applications may include compound
5 content. Compound content includes a primary content item **116a** carrying, or otherwise associated with, one or more attached or embedded content items **116b**. For convenience, the primary content item may be referred to as the container **116a** and attached or embedded content may be referred to as attachments **116b**. A common example of compound content is email messages (containers) with attached documents (attachments).
10 Other examples of compound content include presentations, spreadsheets, word processing documents, and fixed format documents (containers) with other linked or embedded documents, media files, or content snippets separately viewable or editable using another application.

[0014] When a user interacts with an attachment using an application associated
15 with the system, the adaptive layout and workflow engine collects information **118** about the device requesting the attachment. In the distributed embodiment of the system, users may access the applications from different client devices at various times. For example, a user may access the applications from a desktop computer while in the office at work, a laptop computer from home, and a tablet or smartphone from most anywhere else.
20 Accordingly, the adaptive layout and workflow engine may collect information each time a request for an attachment is made, on periodic basis, or only at the first attachment request of a single continuous session for a particular user.

[0015] Information may be requested by a wide variety of techniques including,
25 but not limited to, calls to an application programming interface (API) provided by the operating system on the client device, remote procedure calls (RPC) and other inter-process communications, structured query language (SQL) queries, electronic data interchange (EDI) communications, and requests using a general or specialized protocol suitable for obtaining about the client device. The information usable by the system includes information that can be used directly to assess the display capabilities of the
30 device (e.g., resolution, dots per inch, pixels per inch, orientation, or aspect ratio). The system may also obtain information that indirectly allows the display capabilities of the device to be determined. For example, the system may receive a model number associated with the device that may be used to locate the corresponding display capabilities, which may be stored in a database, table, list, or other reference source. Such information may

include extended information that is not normally utilized by the device, such as the physical size of the display.

[0016] Based on the display capabilities, for example, the aspect ratio of the device, the adaptive layout and workflow engine selects a default layout for presenting the attachment to the user. The selection of the default layout may be based on the display characteristics of the device, the type and/or format of the content, the amount of the content, or the applications used to present the content. Devices with constrained displays, such as having small aspect ratios and/or small physical sizes, may not be well suited for simultaneously displaying the attachment and the container. In such cases, the default layout automatically selected by the adaptive layout and workflow engine may be a full screen layout presenting only the attachment. Other layouts may be available to be manually selected by the user, such as, but not limited to, a side-by-side layout and other multiple region layouts. On the other hand, for devices with more generous display capabilities, such as large aspect ratios, multiple displays, and/or large physical displays, the default layout automatically selected by the adaptive layout and workflow engine may be a side-by-side layout and other multiple region layouts may be considered suitable for simultaneously displaying the attachment and the container. The various layouts may be predefined and stored as layout definitions **120**.

[0017] Layout selection may be based solely on the display characteristics. Basic layout selection may involve an evaluation of the display size and, when appropriate, the aspect ratio or orientation. Some determinations may be based solely on display size. For example, some displays having small resolutions or physical sizes (e.g., a smartwatch or smart phone) may never be suitable for a side-by-side view, regardless of orientation. However, in some instances, a side-by-side view may be appropriate depending upon the orientation of display (e.g., when in a landscape orientation).

[0018] Similarly, layout selection may involve evaluating selected usable or acceptable widths for displaying the container and the attachment in a meaningful side-by-side view against the available display area. Different selected widths may be established for the container and the attachment. When the sum of the selected widths of the container and the attachment are greater than the available display width, the adaptive layout and workflow engine selects a full screen view as the default layout for displaying the attachment. The selected widths may represent minimum widths for a proportional view layout or an absolute width for at least one of the attachment and/or the container in a fixed view layout. For example, a side-by-side view may be defined by allotting a fixed

400 pixels or a proportional 40 % of the display width to the attachment and the remainder to the container, provided that the display has a minimum width of 1000 pixels or the attachment or container has a selected minimum width (i.e., the container width is at least 600 pixels, in this example).

5 [0019] More complex layout selection may consider the context or the characteristics of the content in addition to the display characteristics. Layout selection may also factor in the format of the content, the type of content, the amount of content, and the applications used to present the content. For example, if the content is of a type that is not editable (i.e., read-only), a smaller minimum width may be acceptable than if
10 the content is editable because of factors such as the limited need to manipulate the content for viewing (e.g., primarily scrolling) in contrast to the additional display requirements of the editing user interface (e.g., a virtual keyboard) and the increased precision typically required for editing.

[0020] The type and format of the content may also be factored into layout
15 selection. If the content is in a reflowable format rather than a fixed format, a side-to-side view may be acceptable because the content may be reformatted to fit within the available area without requiring horizontal scrolling, significantly reducing the scale or font size of the content to fit within the space allotted, or otherwise reducing the readability of the content. In many cases, horizontal scrolling is less acceptable than vertical scrolling
20 because of the way that users are accustomed to processing content. In contrast, displaying fixed format content that exceeds the available width allotted in a side-to-side view necessarily requires reducing the scale of the content or horizontal scrolling. In the case of fixed format documents, the amount of scale reduction needed to avoid horizontal scrolling may render the content virtually unreadable on small form factor, low resolution,
25 and small aspect ratio devices. While reflowable content is often associated with text, reflowable content may also include images, tables, and other elements that have fixed size or otherwise do not reflow well. Accordingly, the adaptive layout and workflow engine may apply a threshold to the proportion of such fixed size elements to the reflowable elements when determining the default layout.

30 [0021] Layout selection may also consider the amount of content in the attachment. If the amount of content is small, a side-to-side view may be acceptable, even where the presentation is compressed width-wise (e.g., only a few word per line), when the entire content is displayable at one time or with limited scrolling (e.g., vertical scrolling). Conversely, a long document, even if it can be presented in the allotted space of

a side-to-side view, may be better suited to full screen view to minimize the amount of vertical scrolling required.

[0022] Additionally, the application user interfaces involved may be factored into layout selection. A full screen layout may be selected when the application user interfaces
5 involved require significant amounts of display space, especially to the sides of the content.

[0023] The adaptive layout and workflow engine may incorporate some or all of the various aspects of layout selection in any combination. For example, consideration of the application user interfaces may be combined with the determination of whether the
10 content is editable or not. Thus, whether the default layout for editable content is a side-by-side view or a full screen view may depend on the application user interface.

[0024] In addition to automatically adapting the default layout for presenting compound content to the user based on the device used to consume the content, the adaptive layout and workflow engine may also provide adaptive workflows via the user
15 interface based on the display capabilities of the device used to consume the content, and, optionally, the nature of the content and/or the actions taken by the user. The adaptive workflows provide context-sensitive task controls that allow the user to perform sequences of actions incorporating information from the compound content in ways that minimize limitations resulting from constrained displays. The context-sensitive task controls initiate
20 task sequences that allow the user to focus on substantively working with the content rather than logistically managing the individual content items and switching between various applications to initiate multiple actions (e.g., load, save, edit, create, reply, or send) involved in completing the substantive task, which may be especially inefficient or unnecessarily complicated or difficult on devices with constrained displays. The adaptive
25 context-based workflows may be predefined and stored as workflow definitions 122.

[0025] The nature of the content and/or the actions taken by the user considered may be used by the adaptive layout and workflow engine to predict the tasks the user may or is likely to perform. For example, if the content is not editable (e.g., a fixed format document), the adaptive workflow will not provide context-sensitive task controls
30 involving editing the document, but may provide context-sensitive task controls associated with responding to the email or redistributing the attachment in a new email (as opposed to forwarding the original email). If the user opens an editable email attachment for viewing, the adaptive layout and workflow engine may predict that the user is likely to engage in further communications based on or including the attachment without editing the

attachment and may provide context-sensitive task controls for replying to the email or redistributing the attachment in a new email via the user interface of viewing application.

[0026] Although described herein in the context of distributed system as a specific example benefiting from the device-aware adaptive layout and workflow functionality provided, the system may be suitably used in other contexts, including purely local contexts where the adaptive layout and workflow engine and the associated applications run on the client device.

[0027] Figures 2A-2D illustrate aspects of a user interface provided by the system allowing a user to selectively display an email and its attachments in various views rendered optimized for a device with a width constrained display. Width constrained displays are generally any display whose physical size, resolution, dots per inch (dpi), pixels per inch (ppi), and/or aspect ratio are not well for displaying multiple documents at one time. Width constrained displays may have smaller widths than heights (e.g., 3:2 or 71:40 aspect ratios) or may have only slightly larger widths than heights (e.g., a 4:3 aspect ratio). The specific aspect ratios mentioned herein are representative and not intended to be limiting in any way. Examples of devices having width constrained displays include, but are not limited to, smartphones and some tablets, as well as some laptops and monitors used with desktop computers.

[0028] Figure 2A illustrates aspects of a user interface for an email application presented by the adaptive aspect ratio system on the device with the width constrained display. In the illustrated embodiment, the device **200** with the width constrained display **202** is a tablet with a 4:3 aspect ratio. While larger than smartphones, the displays on tablets are still limited in size and resolution compared to desktop displays. Although described in the context of a tablet as a representative computing device, the adaptive aspect ratio system is operable with a wide variety of computing devices including, but not limited to, smartphones, tablets, laptops, and desktop computers using a wide variety of user interface and input types, such as, but not limited to, speech, typing, touch gestures, and menu navigation via, for example, text based interfaces, graphical user interfaces (GUIs), natural user interfaces (NUIs), spoken language interfaces (i.e., speech recognition systems).

[0029] The user interface **204** of an email application provided via the user agent shows a two panel view of the inbox **206** and a selected email message **208** containing an attachment **210**. The user wishing to view the attachment clicks on the attachment control **212** in the email message user interface. At this time, the adaptive layout and workflow

engine determines the size of the display area available for rendering the email attachment. In this case, the user interface is rendered on a tablet with a relatively limited display and 4:3 aspect ratio. The adaptive layout and workflow engine may also consider the size of the attachment and the user interface of the viewer. The attachment is a document with a size that is large relative to the size of the display on the tablet. Accordingly, the adaptive layout and workflow engine determines that the attachment should be rendered in a full screen view on the tablet display for consumption by the user.

[0030] Figure 2B shows aspects of the default full screen view based on the available display area of the width constrained tablet using the system. Although the adaptive aspect ratio system selected the full screen view of the attachment **214** as the most appropriate default view given the available display area, the user interface **216** of the viewer application may offer the user with an option to manually select one or more alternate views. For example, the adaptive layout and workflow engine may show an alternate view control **218** in the user interface of the document viewer/editor application. In the illustrated embodiment, the alternate view control is a side-by-side view control.

[0031] Figure 2C shows aspects of interaction with the user interface of the document viewer/editor application to select an alternate view using the system. For example, the user may wish to review the email that contained the attachment while also viewing the attachment and clicks on the side-by-side view control **218** in the user interface of the document viewer/editor application causing the adaptive aspect ratio display system to present a scaled side-by-side view of the attachment and the email in the user interface.

[0032] Figure 2D illustrates aspects of the user interface presented by the adaptive layout and workflow engine showing a scaled side-by-side view of the email attachment and the email on the device with the constrained width display. In the alternate view, the user interface may present a default view control **220** allowing the user to manually return to the default layout and view the attachment individually in a full screen view.

[0033] Figures 3A and 3B illustrate embodiments of a user interface provided by the system allowing a user to selectively display an email and its attachments in various views rendered optimized for a device with a large aspect ratio (e.g., 16:9 or 16:10 aspect ratios) display. Examples of devices with large aspect ratio displays include, but are not limited to, some tablets, laptops, and monitors used with desktop computers.

[0034] Figure 3A illustrates aspects of a user interface for an email application presented by the adaptive aspect ratio system on a device with a large aspect ratio display.

In the illustrated embodiment, the device **300** with the large aspect ratio display **302** is a tablet with a 16:9 aspect ratio. As before, the user clicks the attachment control in the email message and the system selects the default display.

[0035] Figure 3B shows a default side-by-side view of the attachment and the email message on the tablet with the large aspect ratio display using the system. In this instance, the default layout selected by the system is a side-by-side view because the larger width of the tablet is suitable to display a substantial portion of both documents with limited overlap. The system may scale the side-by-side view to display the wider view of one content item and a narrower view of the other content item. For example, when the attachment is a fixed format document, the system may devote more of the available display area to showing the attachment and using a minimal amount of space to display the email message, which is generally a flowing document that reformats based on the available view window. The user interface on a device with a large aspect ratio display may still offer alternative view controls giving the user the ability to change to a full screen view of either content item or another available layout.

[0036] Figures 4A-4F illustrate embodiments of a user interface implementing a customized workflow implemented by the system to provide the user with an immersive interactive experience that lets the user focus on performing substantive work instead trying to navigate through the ministerial functions associated with the task on the device with the width constrained display.

[0037] Figure 4A shows the user initiating interaction with the attachment; however, the attachment is an editable document (e.g., a presentation). Once again, the system determines that the device requesting the document has a width constrained display and selects the default full screen view for the attachment.

[0038] Figure 4B shows the editable presentation initially opened in a full screen view layout on the device having a width constrained display in viewing mode. The system initially predicts that the user is interested in viewing the document and displays the presentation in a view-only user interface **405** of the presentation application mode (e.g., slideshow presentation mode). However, the system presents edit control **410**, a context-sensitive workflow control, providing access to the presentation edit mode of the presentation application. Figure 4C shows the user manually initiating editing of the presentation by activating the edit control.

[0039] Figure 4D shows the editable presentation opened in a full screen view layout on the device having a width constrained display in editing mode. The user may

edit the presentation via the presentation editing user interface **415** of the presentation application mode. Based on the task context, the system predicts that the user may want to send the edited attachment to someone else once changes have been made. Accordingly, the system provides save-and-share control **420** to facilitate the task of sending the revised attachment via email. Figure 4E shows the user manually selecting to save-and-share control after changes have been made to the presentation.

[0040] Figure 4F shows aspects of the conclusion of the dynamically customized workflow for revising and sending an email attachment using the system. The save-and-share control generates a draft email message, attaches the copy **425** of the revised presentation, and displays the resulting draft email message **430** in a device appropriate layout where it may be edited by the user for sending. Finally, a context-sensitive send control **435** may be provided by the adaptive layout and workflow engine as part of the presentation editing user interface **415** or the user interface **216** of the email application to actually send the finalized email message.

[0041] These predicted actions are accomplished from the presentation editing user interface **415** and do not require the user to switch between the presentation application, the email application, and various file system dialogs to compile the information into an email message ready to finalize and send. The adaptive workflow implemented by the system provides the user with an immersive interactive experience that lets the user focus on performing substantive work instead trying to navigate through the ministerial functions associated with the task (e.g., locating the saved copy of the revised presentation to attach to the draft email).

[0042] Even though the actions are performed on the device with a constrained display, the system may display the draft email message in a side-by-side layout with the presentation rather than alone in a full screen view, as in the illustrated embodiment. This may occur because the adaptive layout and workflow engine recognizes the context of the situation is that the user has finished substantively working with the presentation, but may desire to review/incorporate information from the revised presentation into the body of the email message. Further, given that the email message is generally a flowable document, it may be effectively composed/edited in a relatively small amount of display area. Similarly, review and/or consumption of the finished revised presentation may be accomplished using less display area than is typically required during composing and/or editing. However, a different layout may be selected on a different device. For example, on a smartphone, the draft email message may be presented in a full screen layout.

[0043] Figures 5A-5C illustrate aspects of a user interface implementing a customized workflow implemented by the system to provide the user with an immersive interactive experience that lets the user focus on performing substantive work instead trying to navigate through the ministerial functions associated with the task on the device with the large aspect ratio display using the system. Figure 5A shows the user initiating interaction with the editable attachment **212**, a spreadsheet. Figure 5B shows the default layout of a side-by-side view of the attachment and the email message based on a determination by the adaptive layout and workflow engine that the tablet has enough display area available to present both content items in a reasonably effective manner using the view mode user interface **510** of the spreadsheet application. Again, the user decides to edit the spreadsheet using the context-sensitive edit control **410**.

[0044] The illustrated embodiment also shows that the side-by-side layout has been scaled in a manner predicted by the adaptive layout and workflow engine to optimize the use of the available display area. In contrast to the view mode embodiment of Figure 2D, the email message occupies less of the overall display area and may occupy less actual display area as a result of optional scaling (e.g., layout scaling) by the adaptive layout and workflow engine. In Figure 2D, the portion of the layout allocated to the incoming email message occupies more than half of the available display area on the constrained display tablet. In Figure 5B, the portion of the layout allocated to the incoming email message has been scaled down to devote a greater portion of the layout for showing the spreadsheet content. The determination of the scaling applied by the adaptive layout and workflow engine may be based on the display capabilities of the device, as well as additional factors, such as, but not limited to, content type and characteristics. For example, flowing content (e.g., an email message) may be scaled down to show more of a fixed (e.g., an image) or large (e.g., a spreadsheet) format document that normally benefits from being displayed in a larger display area.

[0045] Figure 5C shows aspects of the conclusion of the dynamically customized workflow for revising and sending an email attachment. Because the larger aspect ratio makes it practicable to display and edit the attachment while simultaneously displaying and composing a draft email for transmitting the revised attached, the adaptive layout and workflow may dynamically shorten the workflow using the system. In this instance, the adaptive layout and workflow engine dynamically updates the edit control **410** to provide edit-and-share functionality. Activating the edit control **410** results in switching to the edit mode user interface **515** of the spreadsheet application, generating a draft email message,

attaching the copy **425** of the revised spreading, and displaying the resulting draft email message **430**.

[0046] In this instance, the default layout selected by the system for the tablet with the large aspect ratio display is a side-by-side view because the larger width of the tablet is suitable to display a substantial portion of both documents with limited overlap. The system scales the side-by-side view to display the wider view of one content item and a narrower view of the other content item. For example, when the attachment is a fixed format document, the system may devote more of the available display area to showing the attachment and using a minimal amount of space to display the email message, which is generally a flowing document that reformats based on the available view window. The user interface on a device with a large aspect ratio display may still offer alternative view controls giving the user the ability to change to a full screen view of either content item or another available layout.

[0047] Figure 6 is a high-level flowchart showing aspects of the method for providing immersive document interaction with device-aware scaling. The method **600** begins with an initial content display operation **602** in which the system renders the initial content item having an associated an attachment on the client device via the user interface. Next, in a content interaction operation **604**, the system receives a request indicating that the user wishes to interact with the attachment.

[0048] An information collection operation **606** collects information about the device used to make the request. The information collected may include, but is not limited to, the type of device, the physical size of the display, the resolution of the display, and the aspect ratio of the display. The information collected may also include information about the amount of the display available to the application for use in rendering the content. For example, a portion of the display may be reserved for display of components of the operating system or other programs.

[0049] A layout selection operation **608** uses the information collected to automatically determine the appropriate default layout for displaying the attachment on the device. On devices with displays that are physically small, have low resolution, or have a constrained width (i.e., a small aspect ratio), the default layout may be a view presenting the attachment by itself (i.e., full screen). On devices with displays that are physically large, have high resolution, or have wider width (i.e., a large aspect ratio), the default layout may be a view presenting the attachment side-by-side with the initial content item

(i.e., split screen). The amount of the display allotted to the initial content item and to the attachment may be scaled for the device.

[0050] A default view rendering operation **610** renders the attachment using the selected default layout. If the default layout presents the attachment by itself (i.e., full screen), an alternate view control may be presented in the user interface. The alternate view control allows the user to manually request an alternate layout, such as a side-by-side layout, displaying both the initial content item and the attachment.

[0051] In an alternate view request receipt operation **612**, the system receives a request indicating that the user wishes to interact with the attachment using the alternate layout. An alternate view rendering operation **614** renders the attachment using the alternate layout (e.g., the side-by-side layout). Once again, the amount of the display allotted to the initial content item and to the attachment may be scaled for the device. In the alternate view layout, a default view control may be presented in the user interface and associated with a default view request operation **616**. The default view control allows the user to manually return to the default layout and view the attachment individually in a full screen view. Other view controls, such as an initial view control, may be provided allowing the user to manually return to the initial layout displaying the initial content item individually in a full screen view.

[0052] The method may optionally include workflow customization. A workflow adaption operation **618** may dynamically select a sequence of actions (i.e., a workflow) based on the device display capabilities and the current context of the user interactions with the content items. For example, if the user initiates editing of an attachment directly from the email rather than storing the attachment locally and editing the local copy, it may be predicted that the user intends to resend or otherwise distribute the edited attachment.

[0053] The workflow adaption operation may also consider the device-appropriate layout associated with the one or more of actions from the sequence based on the device display capabilities. On a device having sufficient display area to allow the user to simultaneous work with both content items, a workflow may be broken down into fewer or different steps when compared to the workflow achieving the same end result on a device with limited display area.

[0054] For example, on a device with a large aspect ratio display, the workflow for editing an attachment and sending a reply including the revised attachment may allow the user to simultaneously edit the attachment and compose the reply in a side-by-side layout when the context-sensitive edit control is clicked. The revised attachment may be

associated with (e.g., pre-attached by reference) to the draft email and the context-sensitive send control may serve to save the attachment and send the email to the designated recipient(s).

[0055] In comparison, on a device with a small aspect ratio display, the workflow
5 takes into consideration that the device is better suited for editing the attachment separately from composing the reply using a full screen layout. Initially, the context-sensitive edit control brings up the attachment in the full screen layout. The workflow adds a context-sensitive share control that saves the revised attachment and attaches it to a draft email displayed using a device appropriate email composition layout, which may be full
10 screen or a side-by-side layout. The context-sensitive send control provided in the email composition context may send the email to the designated recipient(s).

[0056] The subject matter of this application may be practiced in a variety of systems, devices, and other articles of manufacture or as methods and may be implemented as hardware, software, computer readable media, or a combination thereof.
15 Aspects of the invention described herein may operate via a multitude of computing systems including, without limitation, desktop computer systems, wired and wireless computing systems, mobile computing systems (e.g., mobile telephones, netbooks, tablet or slate type computers, notebook computers, and laptop computers), hand-held devices, multiprocessor systems, microprocessor-based or programmable consumer electronics, minicomputers, and mainframe computers.
20

[0057] User interfaces and information of various types may be displayed via on-board computing device displays or via remote display units associated with one or more computing devices. For example, user interfaces and information of various types may be displayed and interacted with on a wall surface onto which user interfaces and information
25 of various types are projected. Interaction with the multitude of computing systems with which aspects of the invention may be practiced may be accomplished by, without limitation, keystroke entry, touch screen entry, voice or other audio entry, gesture entry where an associated computing device is equipped with detection (e.g., camera) functionality for capturing and interpreting user gestures for controlling the functionality
30 of the computing device, and the like.

[0058] Figures 7 through 9 and the associated descriptions provide a discussion of a variety of operating environments for practicing aspects of the invention. However, the devices and systems illustrated and discussed are for purposes of example and illustration

and are not limiting of a vast number of computing device configurations that may be utilized for practicing aspects of the invention described herein.

[0059] Figure 7 is a block diagram of an architecture for a computing device **700** with which aspects of the invention may be practiced. The computing device components described below may be suitable for embodying computing devices including, but not limited to, a personal computer, a tablet computer, a surface computer, and a smart phone, or any other computing device discussed herein. In a basic configuration, the computing device **700** may include at least one processing unit **702** and a system memory **704**. Depending on the configuration and type of computing device, the system memory **704** may comprise, but is not limited to, volatile storage (e.g., random access memory), non-volatile storage (e.g., read-only memory), flash memory, or any combination of such memories. The system memory **704** may include an operating system **705** and one or more program modules **706** suitable for running software applications **720** such as the adaptive layout and workflow engine **102**. For example, the operating system **705** may be suitable for controlling the operation of the computing device **700**. Furthermore, aspects of the invention may be practiced in conjunction with a graphics library, other operating systems, or any other application program and is not limited to any particular application or system. This basic configuration is illustrated by those components within a dashed line **708**. The computing device **700** may have additional features or functionality. For example, the computing device **700** may also include additional data storage devices (removable and/or non-removable) such as, for example, magnetic disks, optical disks, or tape. Such additional storage is illustrated by a removable storage device **709** and a non-removable storage device **710**.

[0060] As stated above, a number of program modules and data files may be stored in the system memory **704**. While executing on the processing unit **702**, the software applications **720** may perform processes including, but not limited to, one or more of the stages of the method **600**. Other program modules that may be used in accordance with aspects of the invention may include electronic mail and contacts applications, word processing applications, spreadsheet applications, database applications, slide presentation applications, or computer-aided drawing application programs, etc.

[0061] Furthermore, aspects of the invention may be practiced in an electrical circuit comprising discrete electronic elements, packaged or integrated electronic chips containing logic gates, a circuit utilizing a microprocessor, or on a single chip containing electronic elements or microprocessors. For example, aspects of the invention may be

practiced via a system-on-a-chip (SOC) where each or many of the illustrated components may be integrated onto a single integrated circuit. Such an SOC device may include one or more processing units, graphics units, communications units, system virtualization units and various application functionality all of which are integrated (or “burned”) onto the chip substrate as a single integrated circuit. When operating via an SOC, the functionality described herein with respect to the software applications **720** may be operated via application-specific logic integrated with other components of the computing device **700** on the single integrated circuit (chip). Aspects of the invention may also be practiced using other technologies capable of performing logical operations such as, for example, AND, OR, and NOT, including but not limited to mechanical, optical, fluidic, and quantum technologies. In addition, aspects of the invention may be practiced within a general purpose computer or in any other circuits or systems.

[0062] The computing device **700** may also have one or more input device(s) **712** such as a keyboard, a mouse, a pen, a sound input device, a touch input device, etc. The output device(s) **714** such as a display, speakers, a printer, etc. may also be included. The aforementioned devices are examples and others may be used. The computing device **700** may include one or more communication connections **716** allowing communications with other computing devices **718**. Examples of suitable communication connections **716** include, but are not limited to, RF transmitter, receiver, and/or transceiver circuitry; universal serial bus (USB), parallel, and/or serial ports.

[0063] The term computer readable media as used herein may include computer storage media. Computer storage media may include volatile and nonvolatile, removable and non-removable media implemented in any method or technology for storage of information, such as computer readable instructions, data structures, or program modules. The system memory **704**, the removable storage device **709**, and the non-removable storage device **710** are all examples of computer storage media (i.e., memory storage). Computer storage media may include random access memory (RAM), read only memory (ROM), electrically erasable read-only memory (EEPROM), flash memory or other memory technology, compact disc read only memory (CD-ROM), digital versatile disks (DVD) or other optical storage, magnetic cassettes, magnetic tape, magnetic disk storage or other magnetic storage devices, or any other article of manufacture which can be used to store information and which can be accessed by the computing device **700**. Any such computer storage media may be part of the computing device **700**.

[0064] Figure 8A illustrates a mobile computing device **800** with which aspects of the invention may be practiced. Examples of suitable mobile computing devices include, but are not limited to, a mobile telephone, a smart phone, a tablet computer, a surface computer, and a laptop computer. In a basic configuration, the mobile computing device **800** is a handheld computer having both input elements and output elements. The mobile computing device **800** typically includes a display **805** and one or more input buttons **810** that allow the user to enter information into the mobile computing device **800**. The display **805** of the mobile computing device **800** may also function as an input device (e.g., a touch screen display). If included, an optional side input element **815** allows further user input. The side input element **815** may be a rotary switch, a button, or any other type of manual input element. The mobile computing device **800** may incorporate more or less input elements. For example, the display **805** need not be a touch screen. The mobile computing device **800** may also include an optional keypad **835**. Optional keypad **835** may be a physical keypad or a “soft” keypad generated on the touch screen display. The output elements include the display **805** for showing a graphical user interface, a visual indicator **820** (e.g., a light emitting diode), and/or an audio transducer **825** (e.g., a speaker). The mobile computing device **800** may incorporate a vibration transducer for providing the user with tactile feedback. The mobile computing device **800** may incorporate input and/or output ports, such as an audio input (e.g., a microphone jack), an audio output (e.g., a headphone jack), and a video output (e.g., a HDMI port) for sending signals to or receiving signals from an external device.

[0065] Figure 8B is a block diagram illustrating an architecture of for a mobile computing device with which aspects of the invention may be practiced. As an example, the mobile computing device **800** may be implemented in a system **802** such as a smart phone capable of running one or more applications (e.g., browsers, e-mail clients, notes, contact managers, messaging clients, games, and media clients/players).

[0066] One or more application programs **865** may be loaded into the memory **862** and run on or in association with the operating system **864**. Examples of the application programs include phone dialer programs, e-mail programs, personal information management (PIM) programs, word processing programs, spreadsheet programs, Internet browser programs, messaging programs, and so forth. The system **802** also includes a non-volatile storage area **868** within the memory **862**. The non-volatile storage area **868** may be used to store persistent information that should not be lost if the system **802** is powered down. The application programs **865** may use and store information in the non-volatile

storage area **868**, such as e-mail or other messages used by an e-mail application, and the like. A synchronization application (not shown) also resides on the system **802** and is programmed to interact with a corresponding synchronization application resident on a host computer to keep the information stored in the non-volatile storage area **868** synchronized with corresponding information stored at the host computer. As should be appreciated, other applications may be loaded into the memory **862** and run on the mobile computing device **800**, including software applications **720** described herein.

[0067] The system **802** has a power supply **870**, which may be implemented as one or more batteries. The power supply **870** might further include an external power source, such as an AC adapter or a powered docking cradle that supplements or recharges the batteries.

[0068] The system **802** may also include a radio **872** that performs the function of transmitting and receiving radio frequency communications. The radio **872** facilitates wireless connectivity between the system **802** and the outside world via a communications carrier service provider, or a privately owned network. Transmissions to and from the radio **872** are conducted under control of the operating system **864**. In other words, communications received by the radio **872** may be disseminated to the application programs **865** via the operating system **864**, and vice versa.

[0069] The visual indicator **820** may be used to provide visual notifications, and/or an audio interface **874** may be used for producing audible notifications via the audio transducer **825**. As shown, the visual indicator **820** may be a light emitting diode (LED) and the audio transducer **825** may be a speaker. These devices may be directly coupled to the power supply **870** so that when activated, they remain on for a duration dictated by the notification mechanism even though the processor **860** and other components might shut down for conserving battery power. The LED may be programmed to remain on indefinitely until the user takes action to indicate the powered-on status of the device. The audio interface **874** is used to provide audible signals to and receive audible signals from the user. For example, in addition to being coupled to the audio transducer **825**, the audio interface **874** may also be coupled to a microphone to receive audible input, such as to facilitate a telephone conversation. The microphone may also serve as an audio sensor to facilitate control of notifications, as will be described below. The system **802** may further include a video interface **876** that enables an operation of an on-board camera **830** to record still images, video stream, and the like.

[0070] A mobile computing device **800** implementing the system **802** may have additional features or functionality. For example, the mobile computing device **800** may also include additional data storage devices (removable and/or non-removable) such as, magnetic disks, optical disks, or tape. Such additional storage is illustrated by the non-
5 volatile storage area **868**.

[0071] Data/information generated or captured by the mobile computing device **800** and stored via the system **802** may be stored locally on the mobile computing device **800**, as described above, or the data may be stored on any number of storage media that may be accessed by the device via the radio **872** or via a wired connection between the
10 mobile computing device **800** and a separate computing device associated with the mobile computing device **800**, for example, a server computer in a distributed computing network, such as the Internet. As should be appreciated such data/information may be accessed via the mobile computing device **800** via the radio **872** or via a distributed computing network. Similarly, such data/information may be readily transferred between computing
15 devices for storage and use according to well-known data/information transfer and storage means, including electronic mail and collaborative data/information sharing systems.

[0072] Figure 9 is a simplified block diagram of a distributed computing system for practicing aspects of the invention. Content developed, interacted with, or edited in association with the software applications **720** may be stored in different communication
20 channels or other storage types. For example, various documents may be stored using a directory service **922**, a web portal **924**, a mailbox service **926**, an instant messaging store **928**, or a social networking site **930**. The software applications **720** may use any of these types of systems or the like for enabling data utilization, as described herein. A server **920** may provide the software applications **720** to clients. As one example, the server **920** may
25 be a web server providing the software applications **720** over the web. The server **920** may provide the software applications **720** over the web to clients through a network **915**. By way of example, the client computing device may be implemented as the computing device **700** and embodied in a personal computer **902a**, a tablet computer **902b**, and/or a mobile computing device (e.g., a smart phone) **902c**. Any of these client devices may
30 obtain content from the store **916**.

[0073] The description and illustration of one or more embodiments provided in this application are intended to provide a complete thorough and complete disclosure the full scope of the subject matter to those skilled in the art and not intended to limit or restrict the scope of the invention as claimed in any way. The embodiments, examples, and

details provided in this application are considered sufficient to convey possession and enable those skilled in the art to practice the best mode of claimed invention. Descriptions of structures, resources, operations, and acts considered well-known to those skilled in the art may be brief or omitted to avoid obscuring lesser known or unique aspects of the subject matter of this application. The claimed invention should not be construed as being limited to any embodiment, example, or detail provided in this application unless expressly stated herein. Regardless of whether shown or described collectively or separately, the various features (both structural and methodological) are intended to be selectively included or omitted to produce an embodiment with a particular set of features. Further, any or all of the functions and acts shown or described may be performed in any order or concurrently. Having been provided with the description and illustration of the present application, one skilled in the art may envision variations, modifications, and alternatives falling within the spirit of the broader aspects of the general inventive concept embodied in this application that do not depart from the broader scope of the claimed invention.

CLAIMS

1. A method for immersive document interaction with device-aware scaling, the method comprising the acts of:

displaying an initial content item containing an attachment;

receiving a request to interact with the attachment;

collecting information about the display configuration of a computing device
presenting the initial content item via a display;

selecting a layout for displaying the attachment based on the display configuration;
and

presenting the attachment using the layout via the display.

2. The method of claim 1 wherein the act of selecting the layout for displaying the attachment based on the display configuration further comprises the act of determining whether the display has sufficient resolution to simultaneously display the attachment and the initial content item.

3. The method of claim 1 wherein the act of selecting the layout for displaying the attachment based on the display configuration further comprises the act of selecting a full screen view for the layout to use for presenting the attachment when the attachment is a document with a width that is large relative to the width of the display.

4. The method of claim 1 wherein the act of selecting the layout for displaying the attachment based on the display configuration further comprises the act of selecting a full screen view for the layout to use for presenting the attachment when the display is width constrained.

5. The method of claim 1 wherein the act of selecting the layout for displaying the attachment based on the display configuration further comprises the act of selecting a side-by-side view for the layout to use for displaying the attachment when the attachment is a document with a size that is small relative to the width of the display.

6. The method of claim 1 wherein the act of selecting the layout for displaying the attachment based on the display configuration further comprises the act of selecting a side-by-side screen layout for the layout to use for presenting the attachment when the display is not width constrained.

7. A system for method of immersive document interaction with device-aware scaling, the system comprising:

a computing device operable to run a first application for interacting with an initial content item containing an attachment and a second application for interacting with the attachment,

a display configuration associated with the computing device;

an adaptive layout and workflow engine operable to:

display the initial content item containing the attachment;

selecting a view based on the display configuration, the view being a full-screen view or a side-by-side view;

receive a request to display the attachment;

display the attachment using the view;

display a context-sensitive task control with multiple actions applicable to the attachment and the initial content item; and

perform each of the multiple actions when the context-sensitive task control is activated.

8. The system of claim 7 further operable to display a layout control allowing selection of an alternate view to override the view.

9. The system of claim 7 wherein the first application is an email application, the second application is an attachment editing application, and the view is a full screen view, the context-sensitive task control operable generate a new email message, save the attachment as a revised attachment, attach the revised attachment to the new email message, and open the new email message for editing.

10. The system of claim 7 wherein the first application is an email application, the initial content item is an email, the second application is a viewer for a read-only attachment, and the view is a full screen view, the context-sensitive task control operable to close the attachment and generate a new email based on the initial content item.

11. The system of claim 7 wherein the adaptive layout and workflow engine is further operable to select a full screen view as the view when the display configuration corresponds to a low aspect ratio.

12. The system of claim 7 wherein the adaptive layout and workflow engine is further operable to select a side-by-side view as the view when the display configuration corresponds to a large aspect ratio.

13. The system of claim 7 wherein the attachment is opened for viewing, the adaptive layout and workflow engine operable to display a context-sensitive task control for redistributing the attachment.

14. The system of claim 7 wherein the initial content item is an email, the adaptive layout and workflow engine is further operable to display a new email based on the initial content item and the attachment in a side-by-side view.

15. A computer readable medium containing computer executable instructions which, when executed by a computer, perform a method of immersive document interaction with device-aware scaling, the method comprising:

displaying an initial content item containing an attachment;

receiving a request to interact with the attachment;

collecting information about the display configuration of a computing device presenting the initial content item via a display;

displaying the attachment in a full screen view or the initial content item and the attachment in a side-by-side view via the display based on the display configuration; and

displaying a context-sensitive task control that, when activated, performs a sequence of actions based on context and the display configuration.

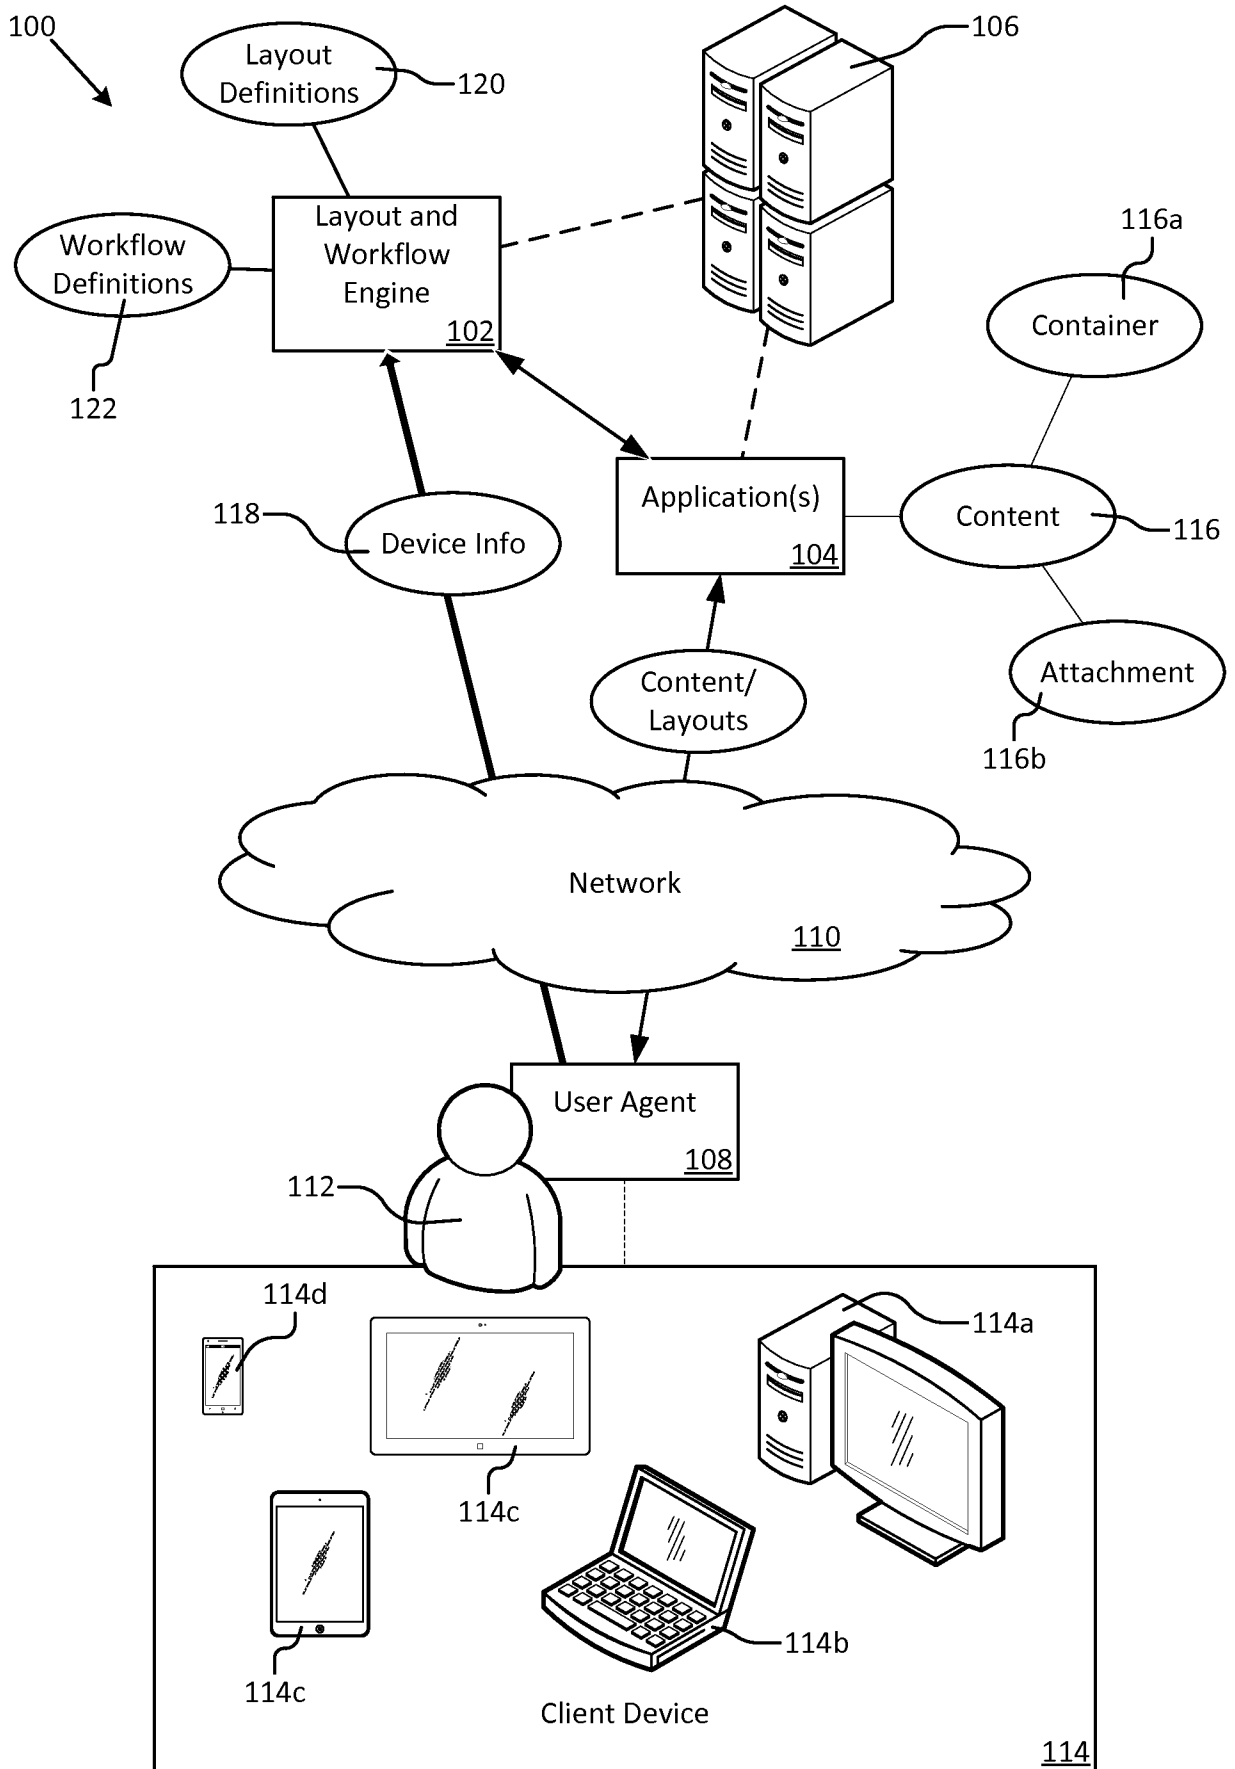


Fig. 1

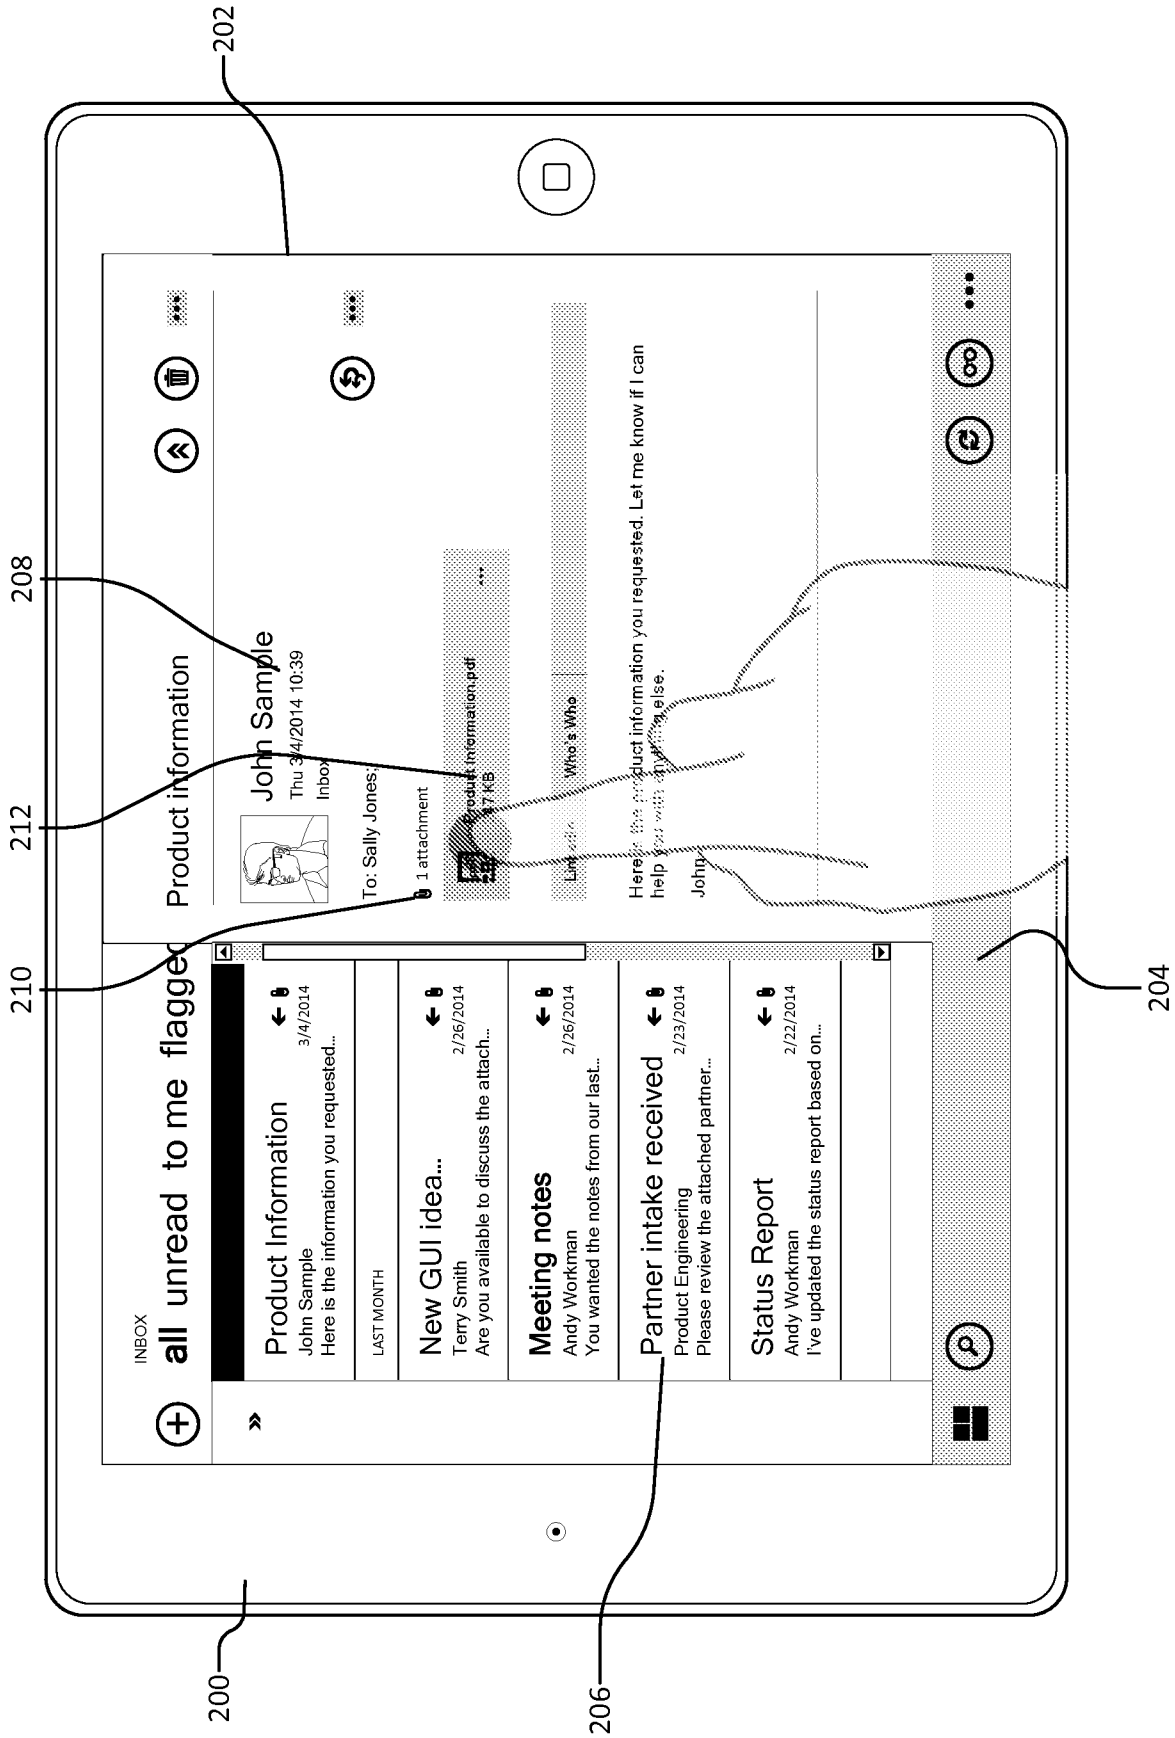


Fig. 2A

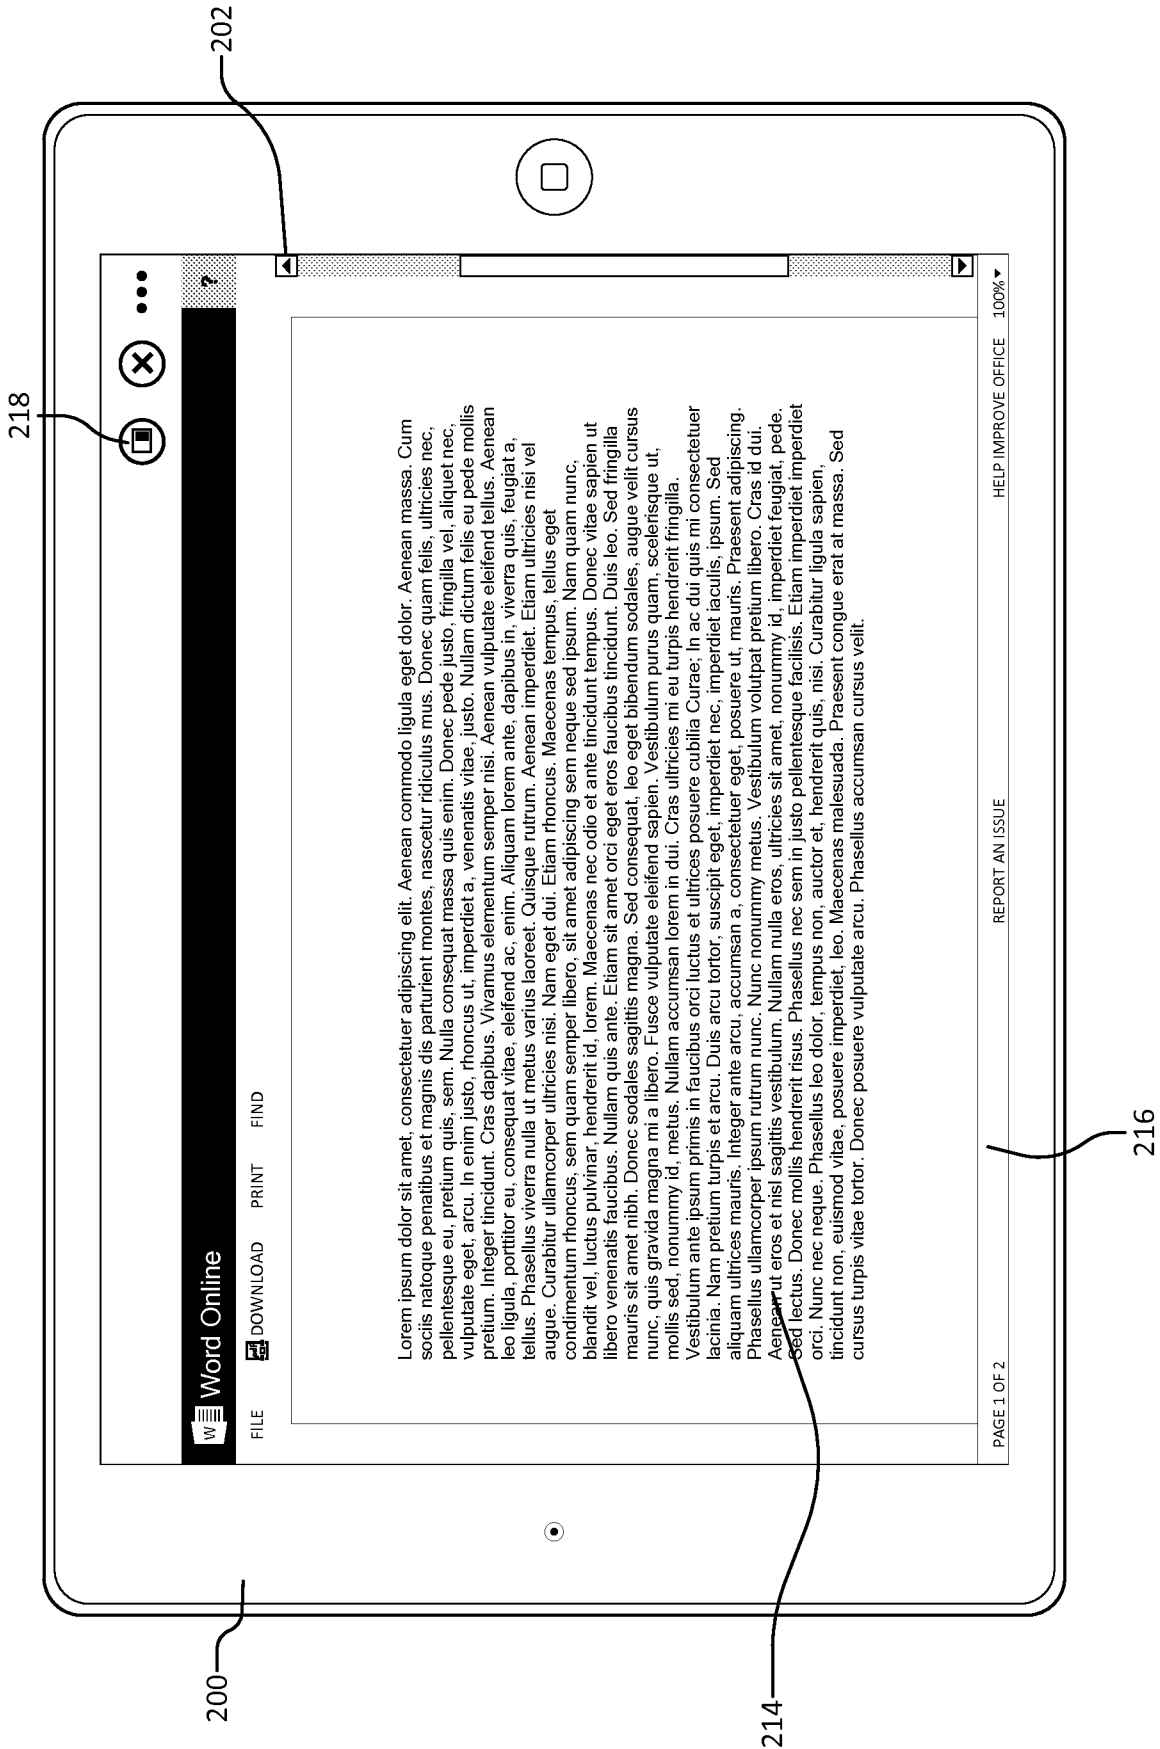


Fig. 2B

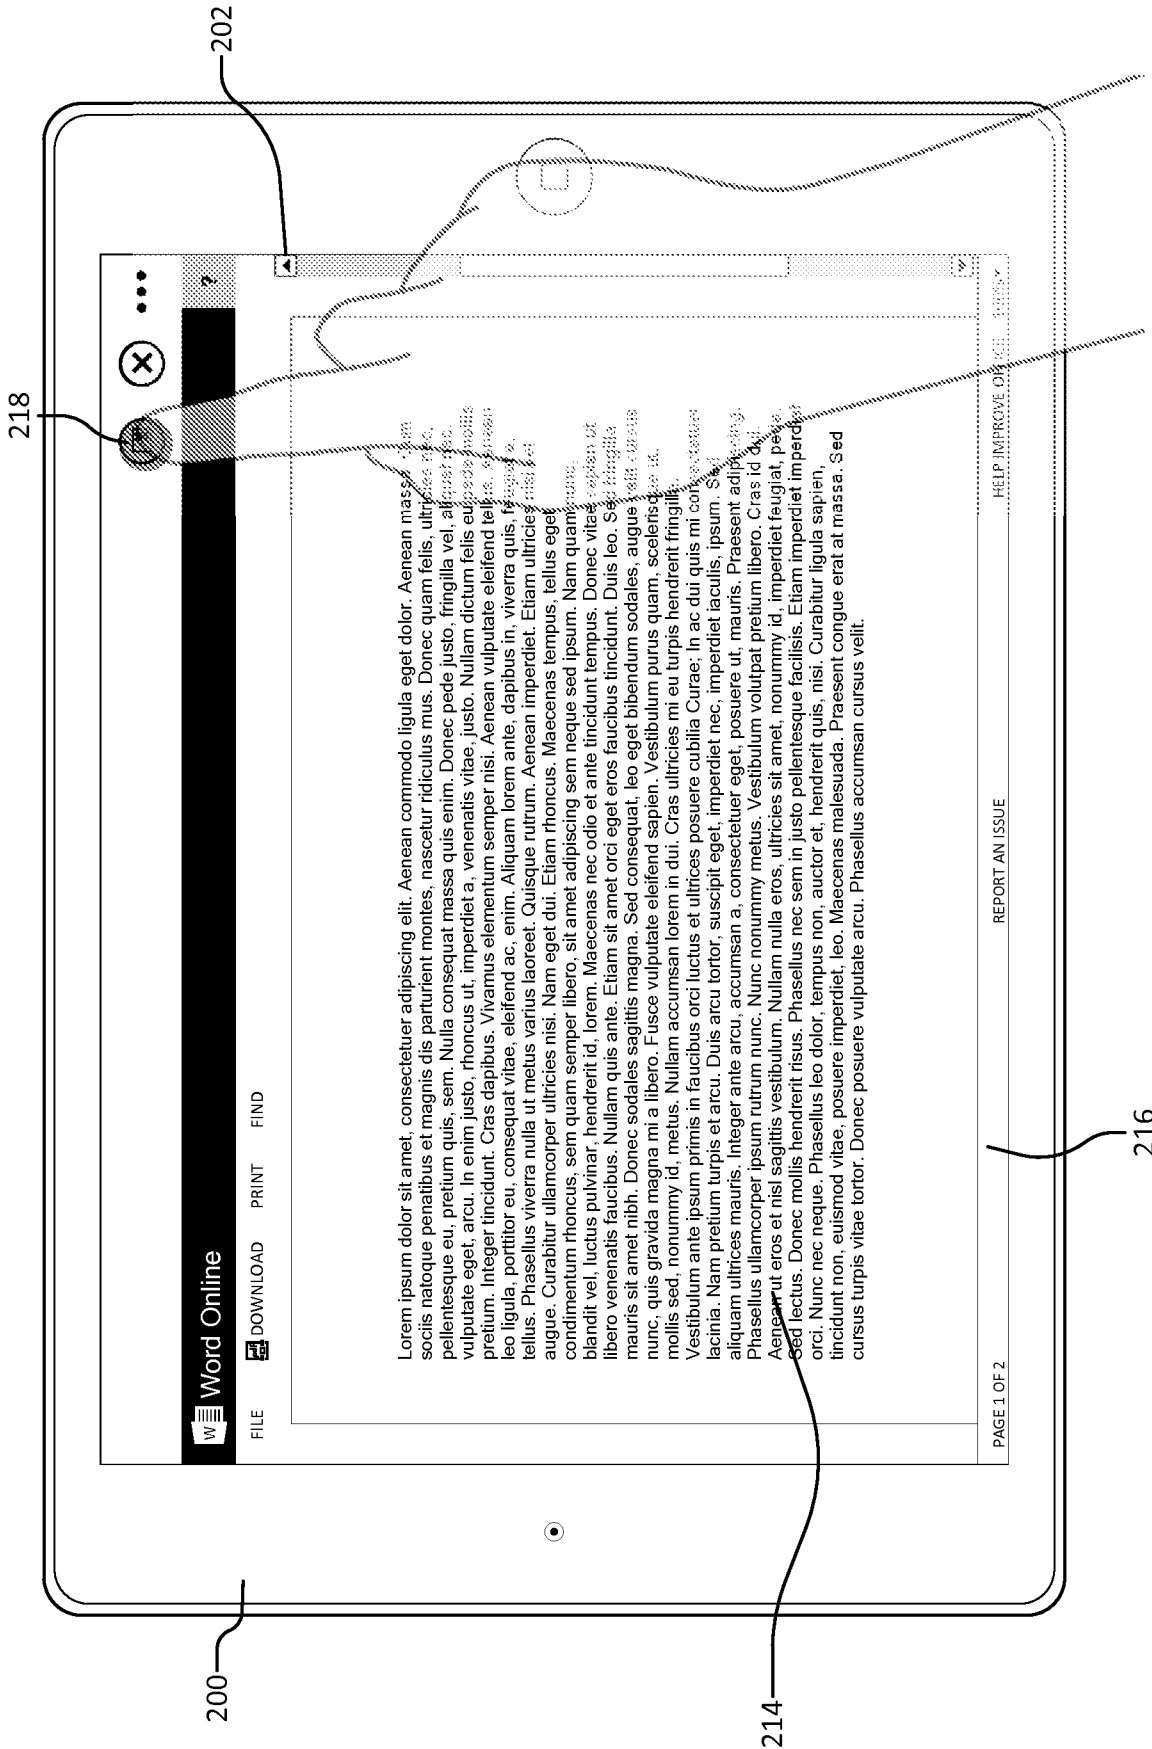


Fig. 2C

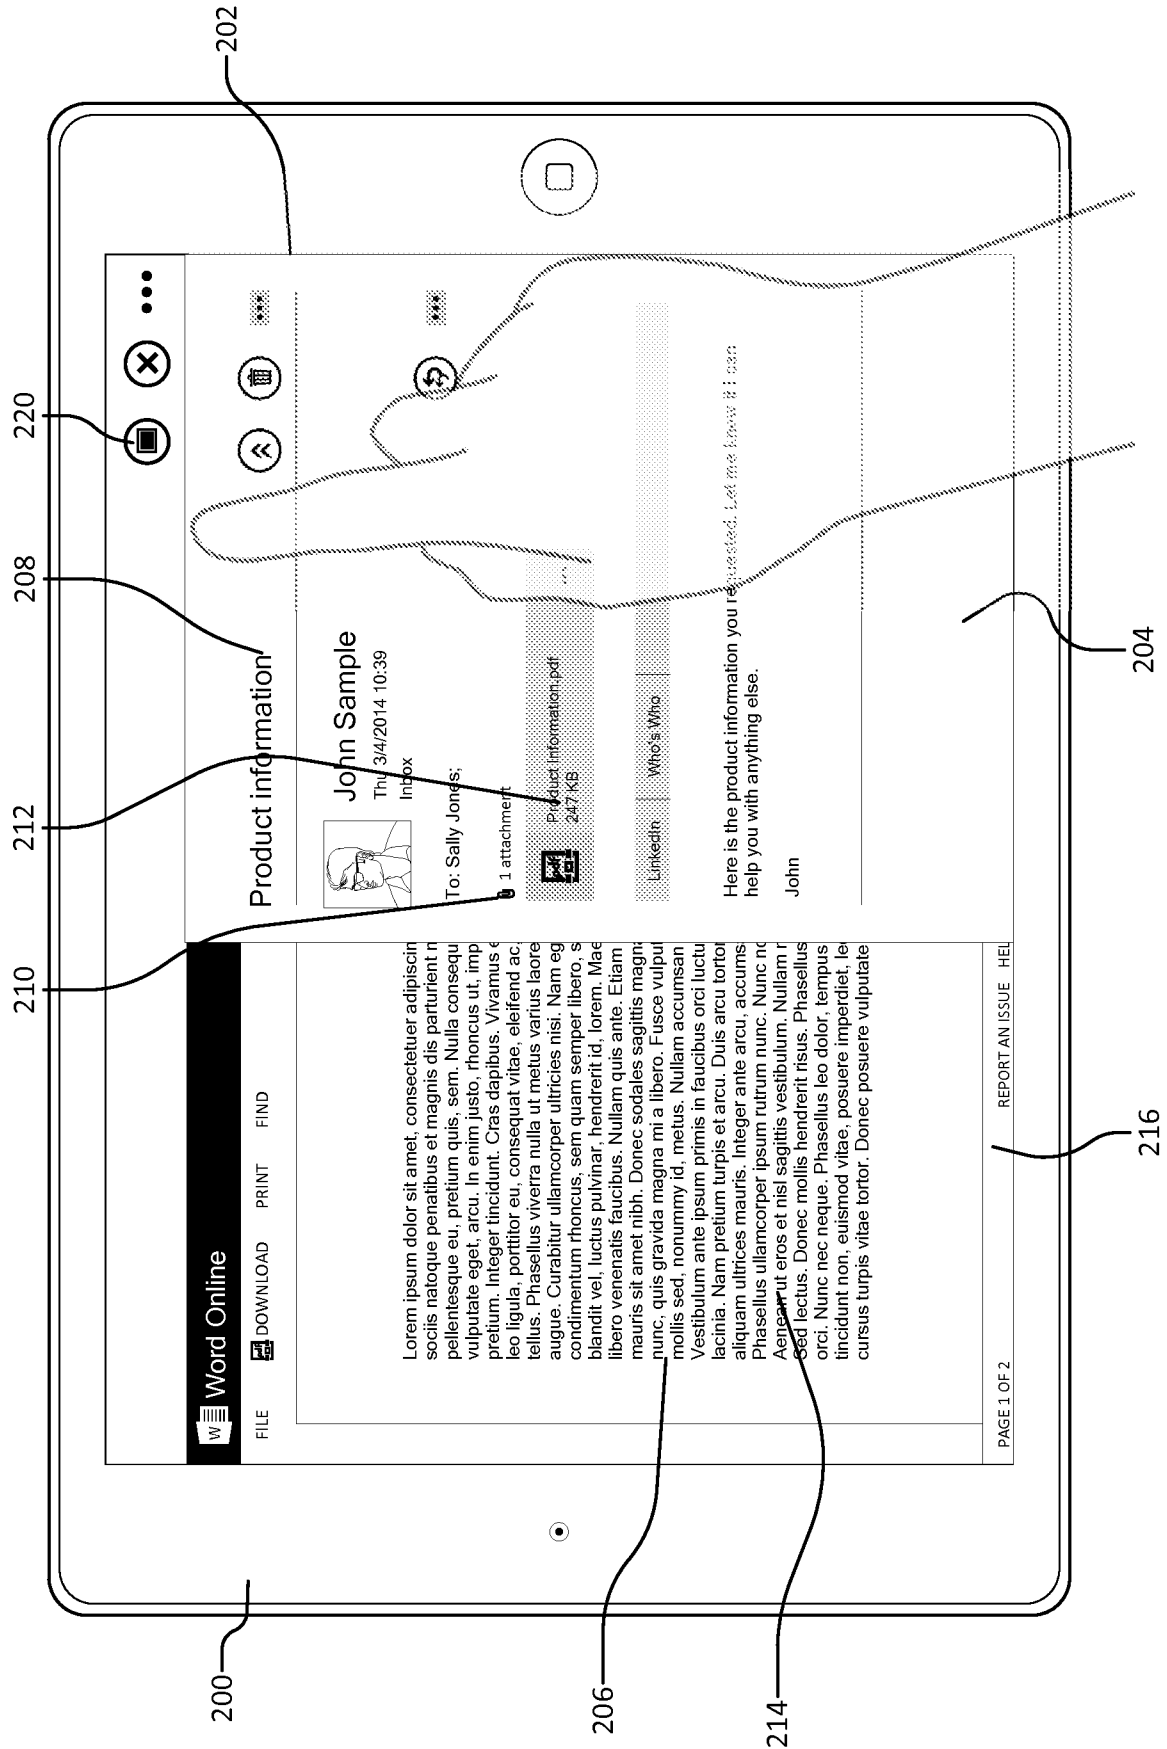


Fig. 2D

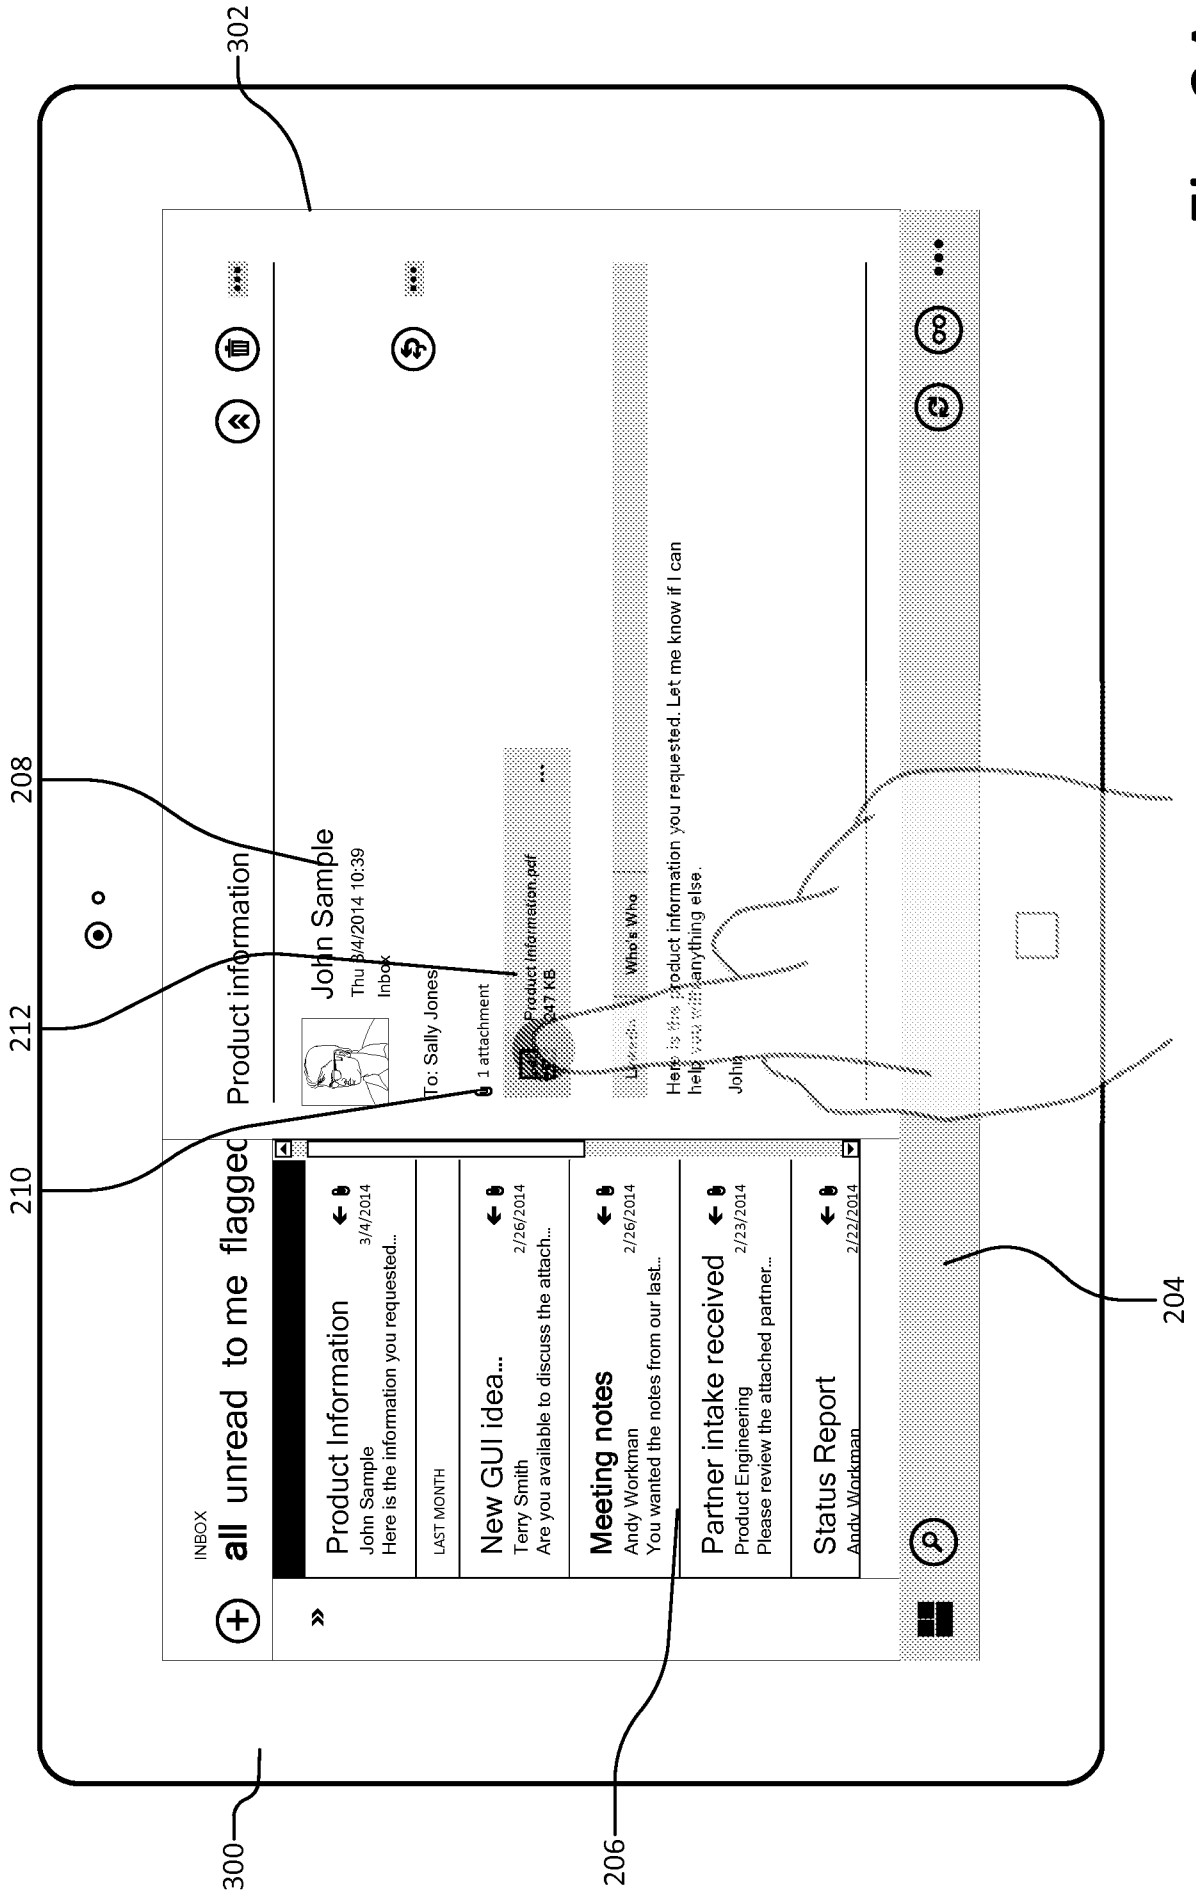


Fig. 3A

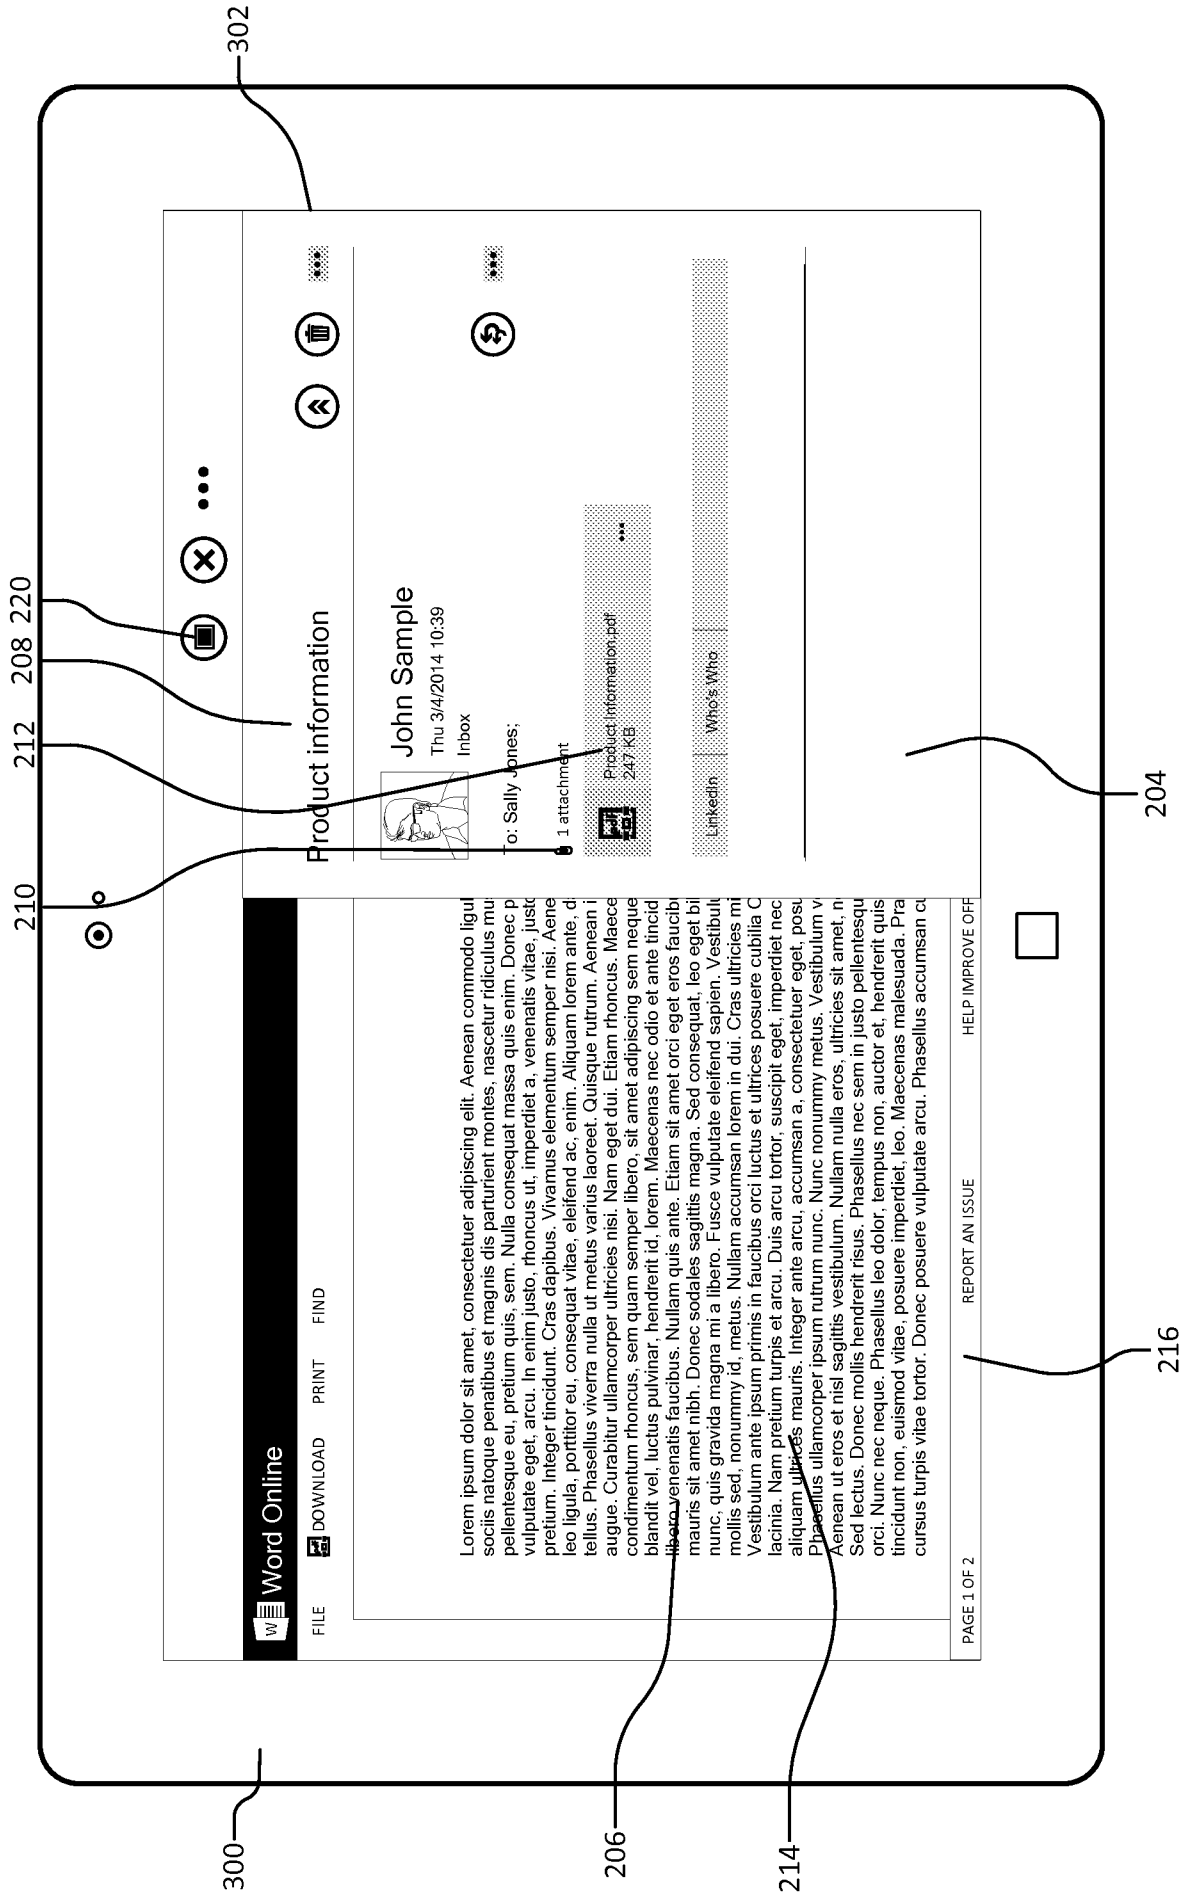


Fig. 3B

8/21

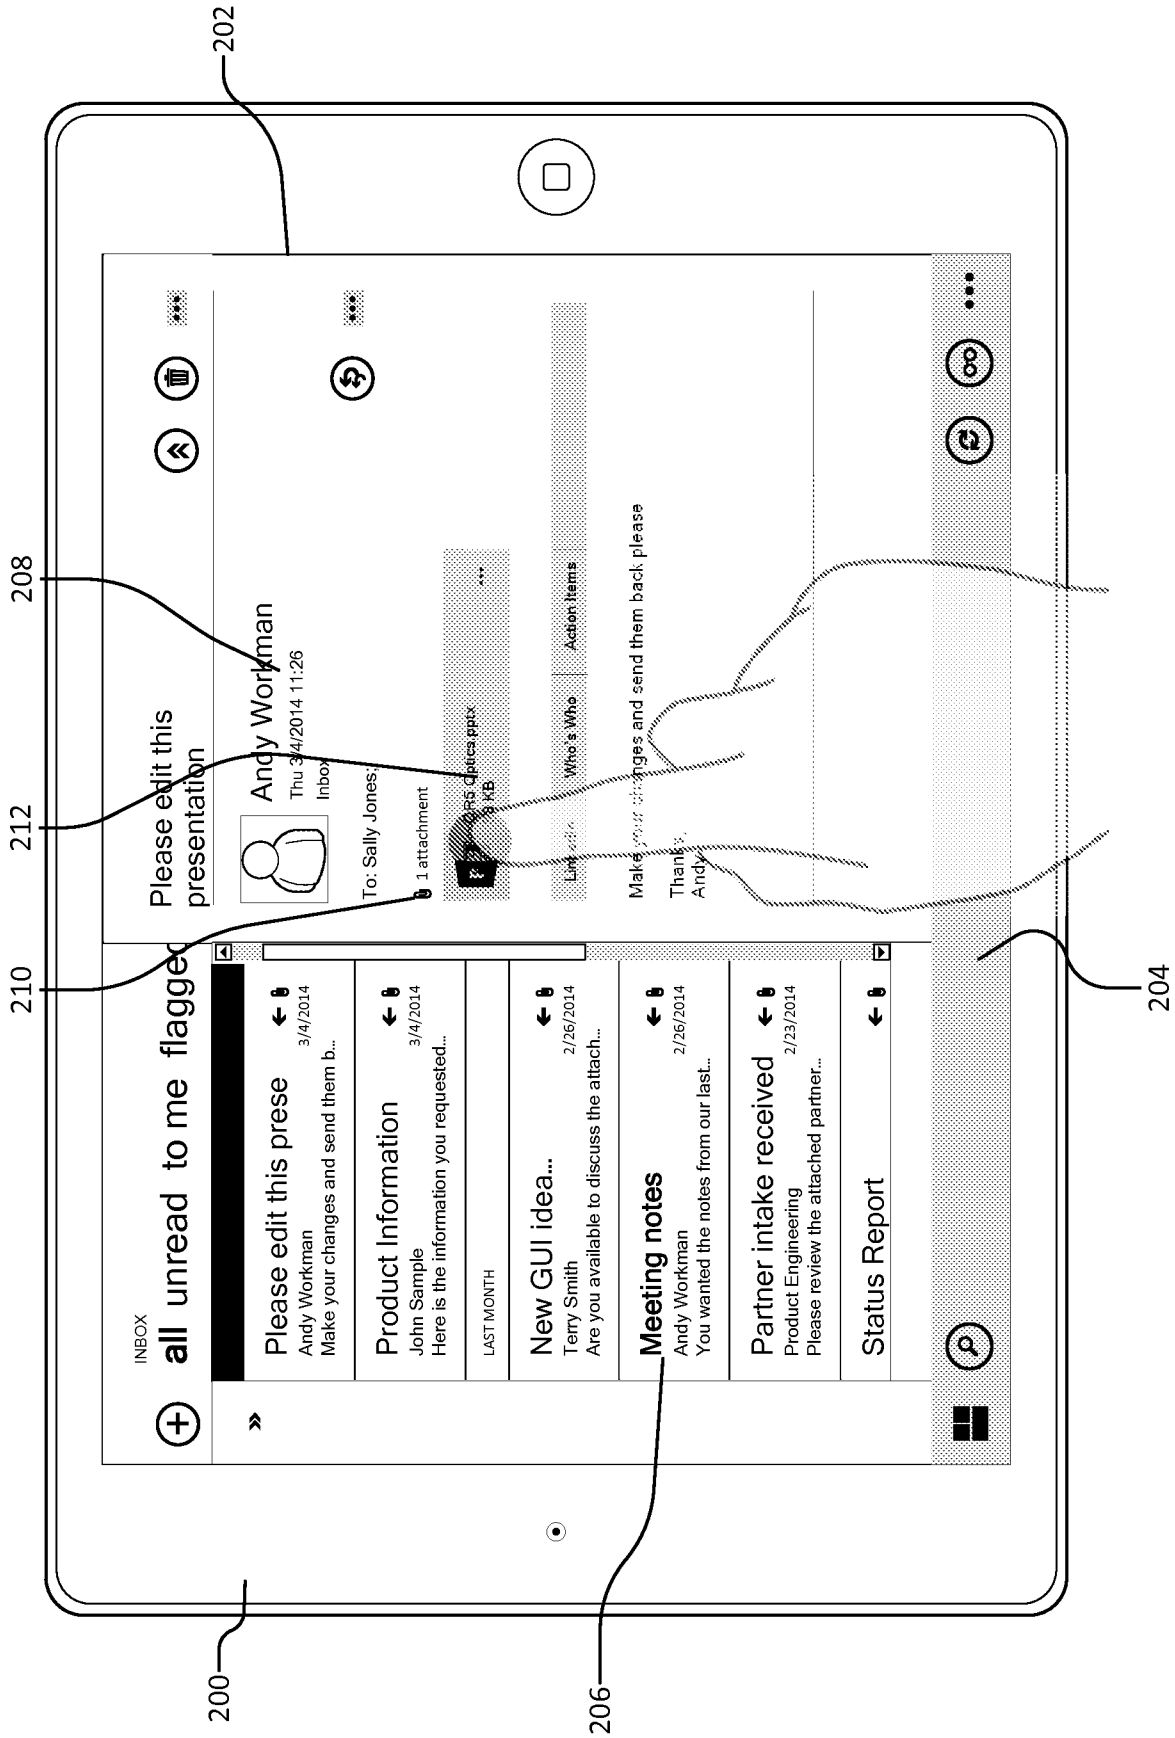


Fig. 4A

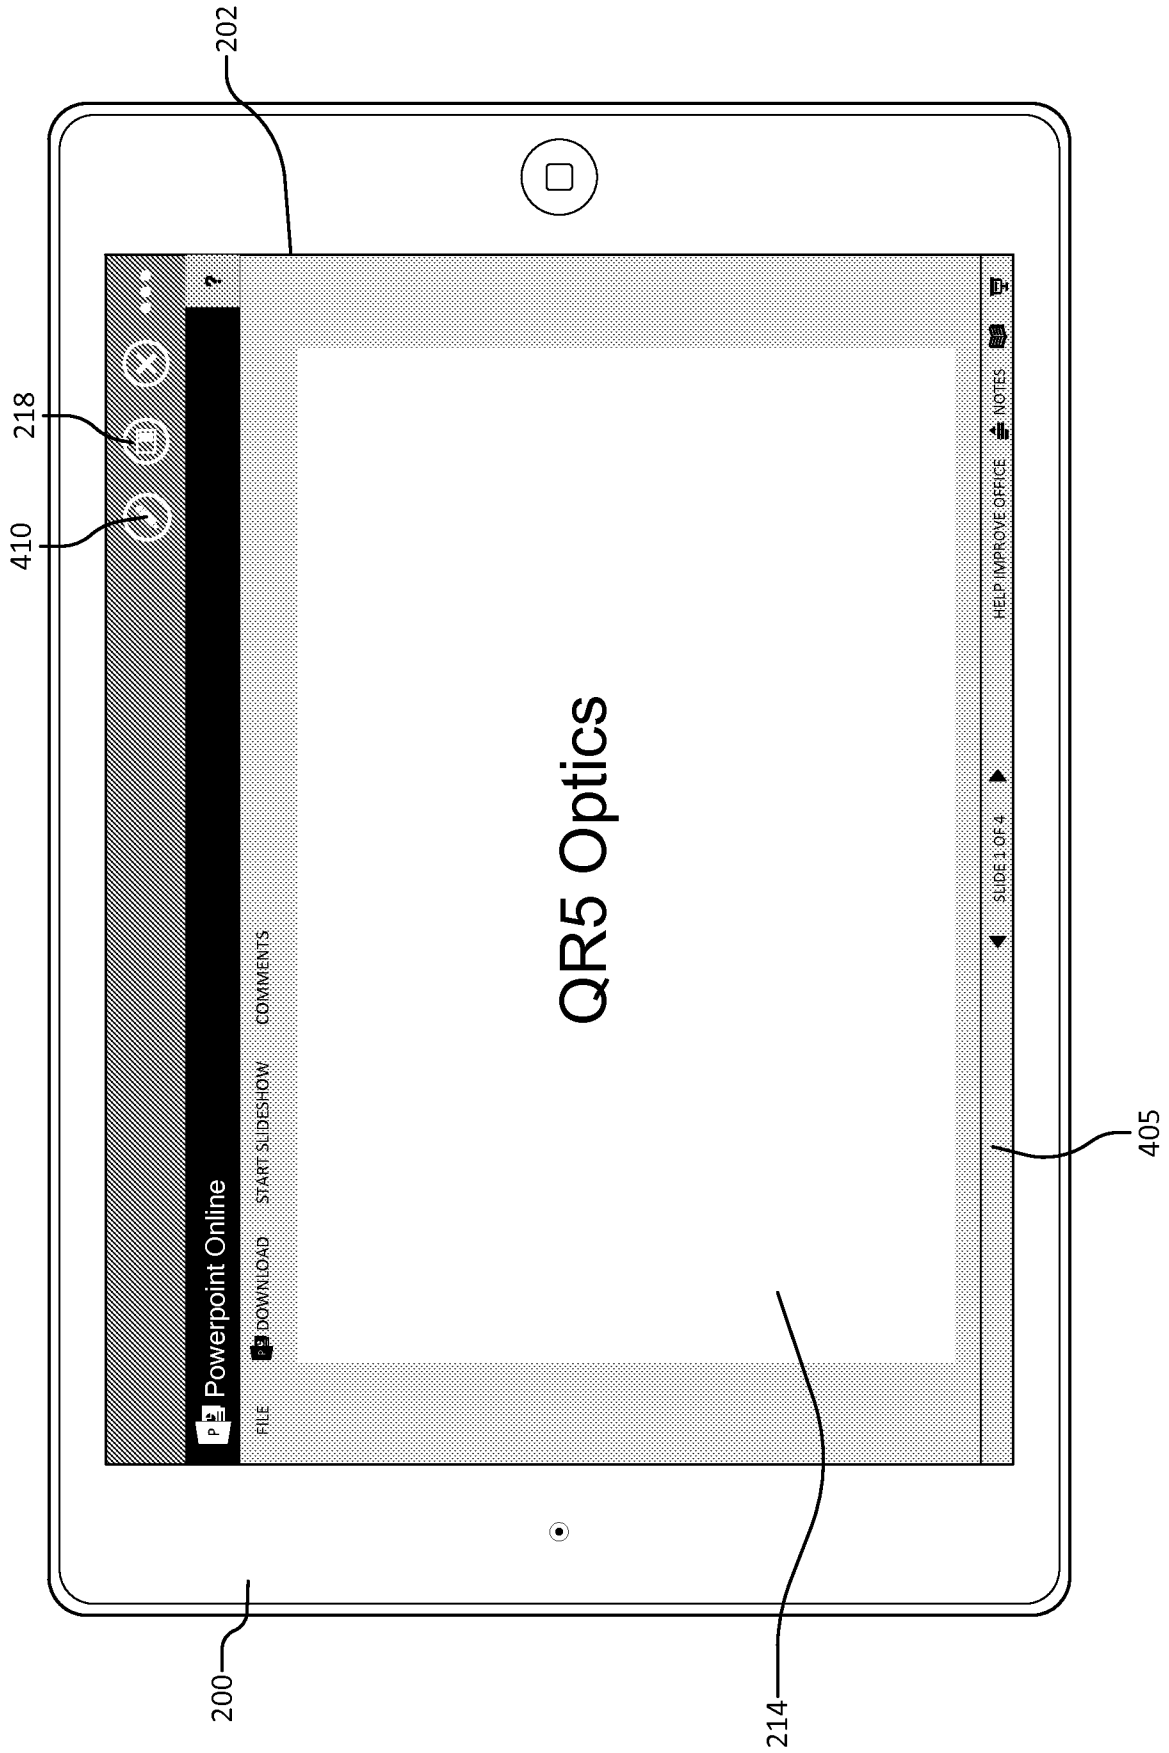


Fig. 4B

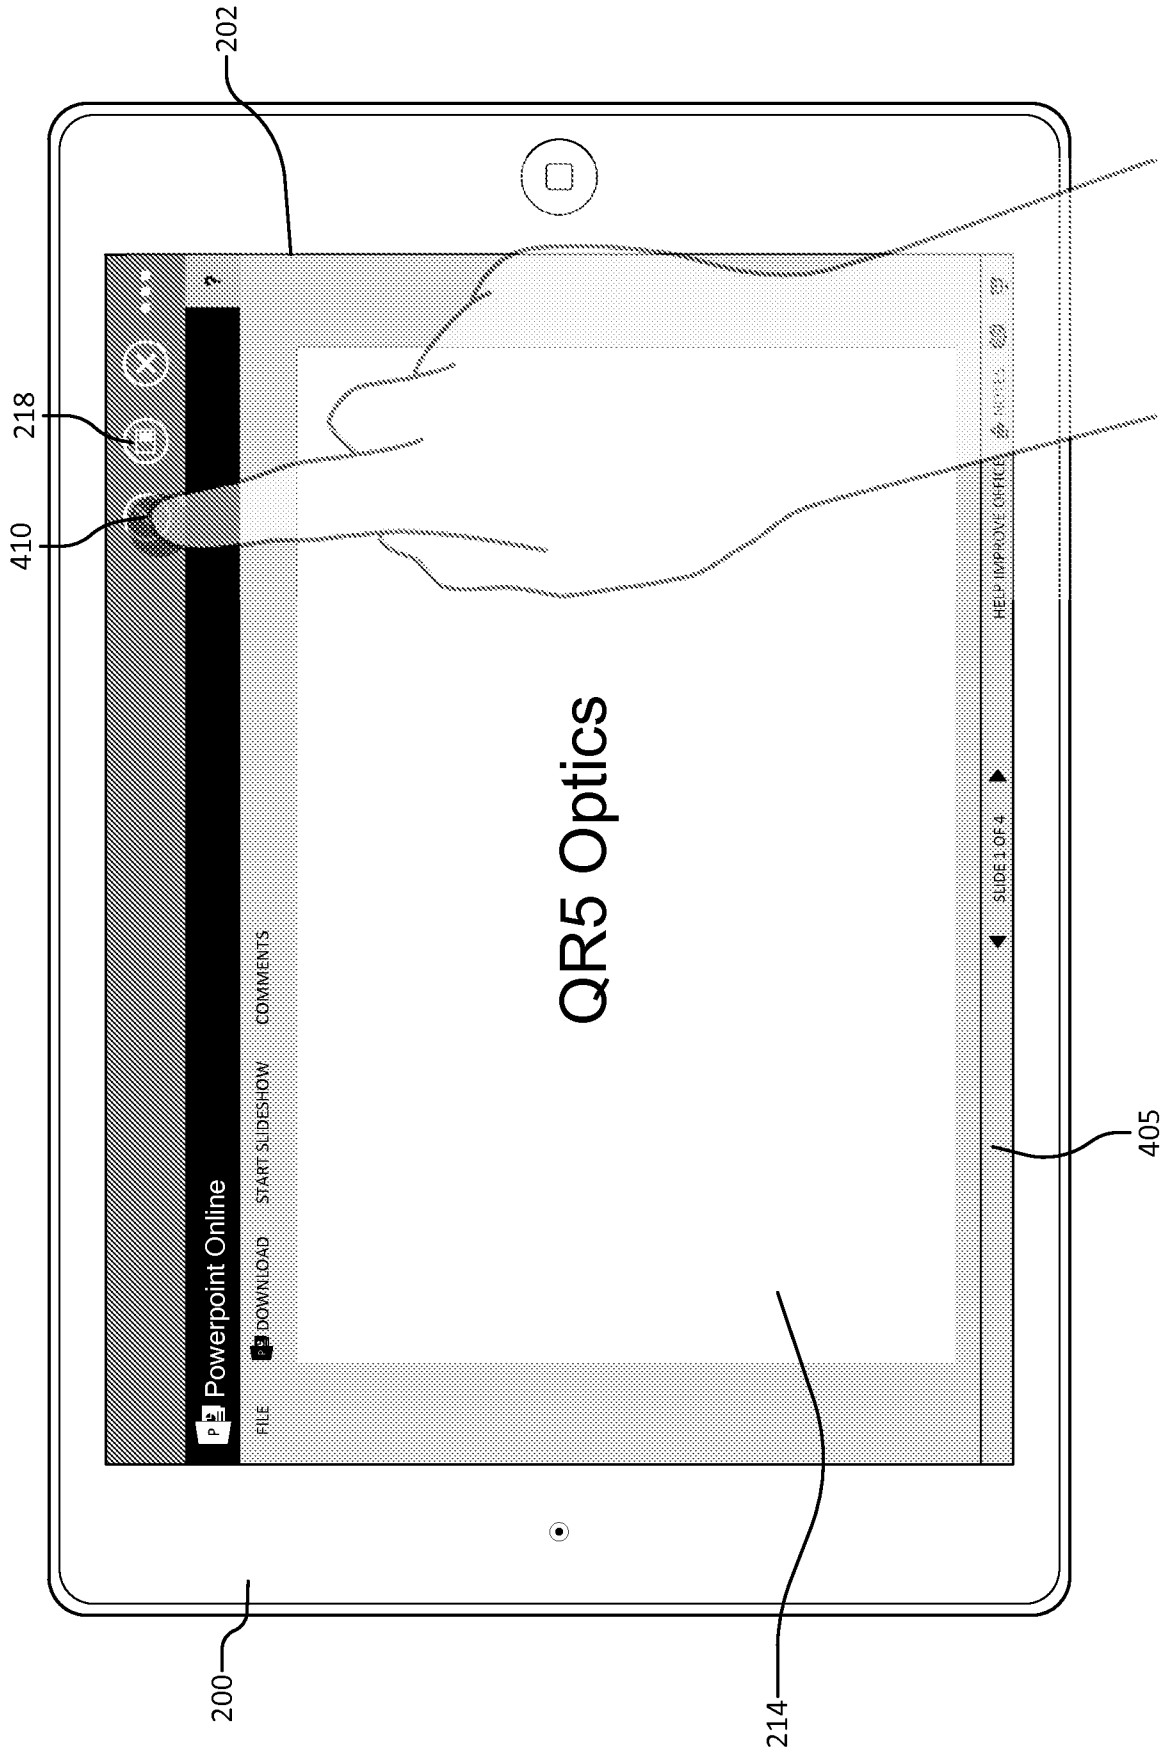


Fig. 4C

11/21

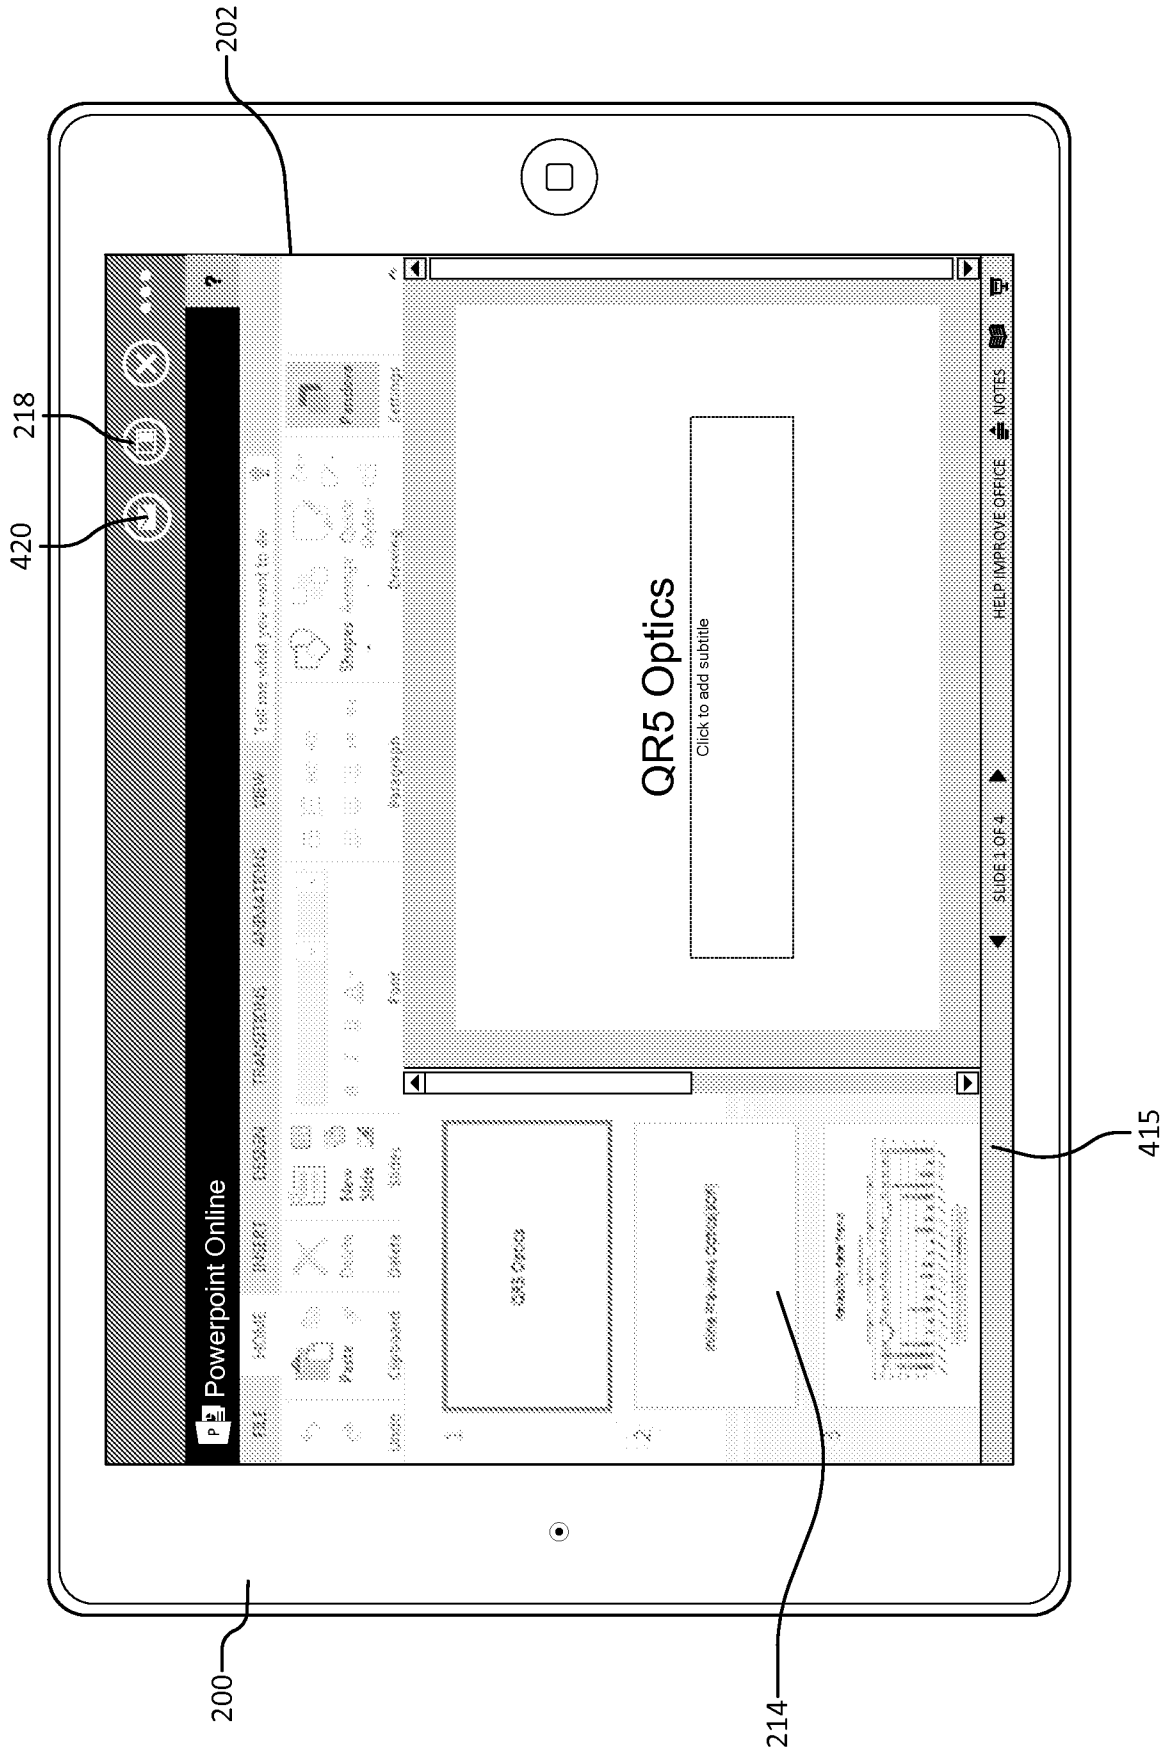


Fig. 4D

12/21

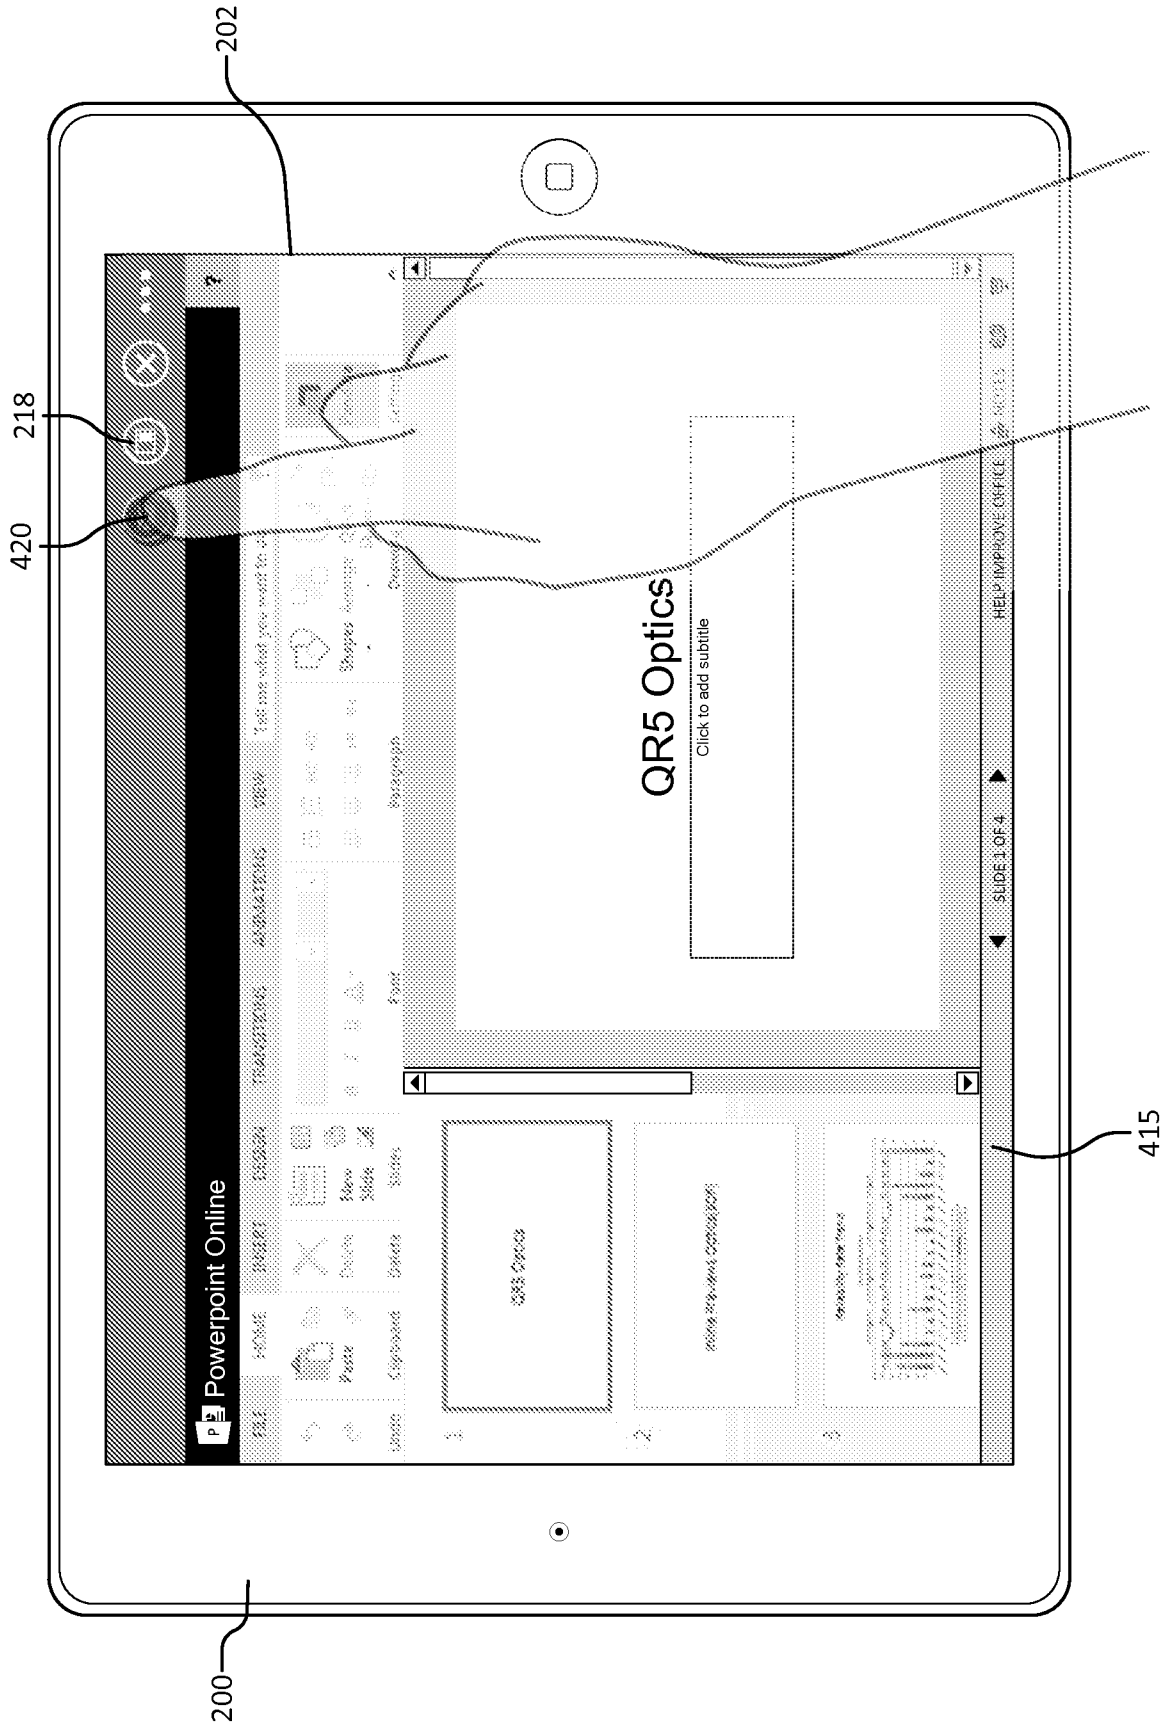


Fig. 4E

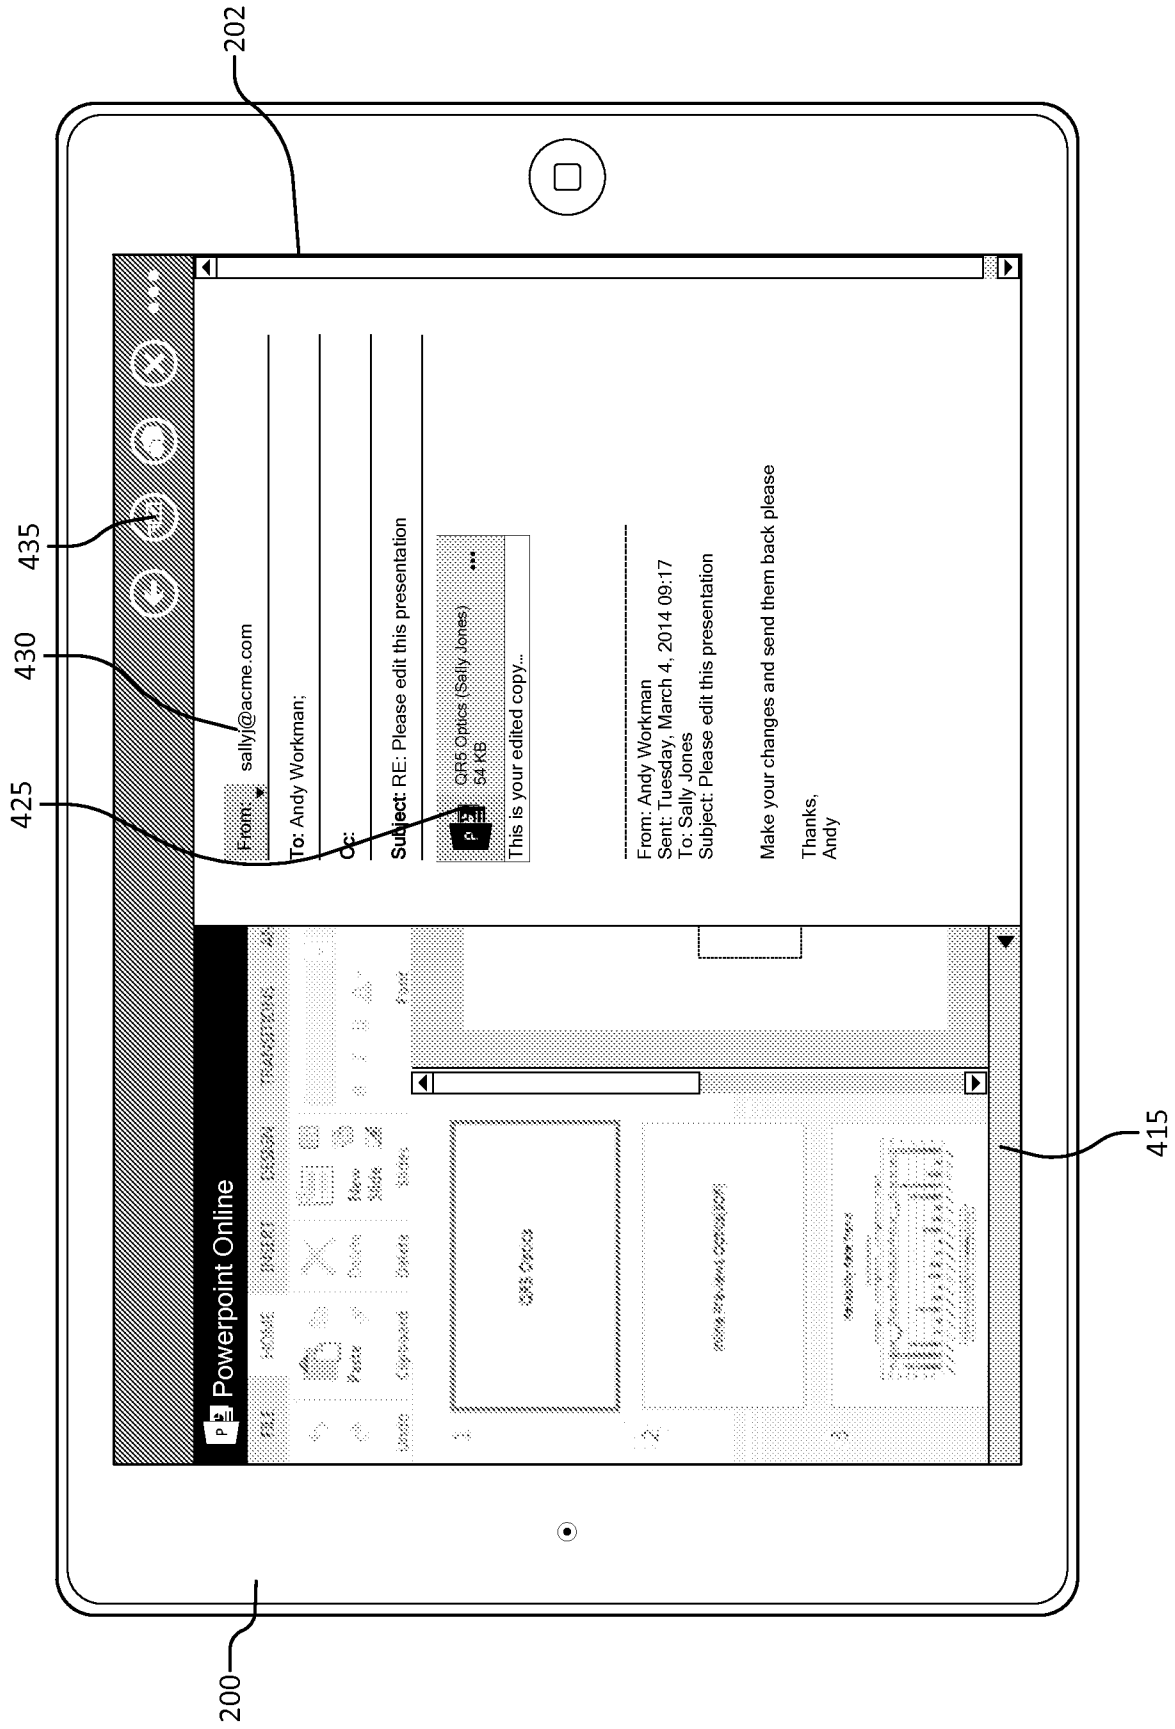


Fig. 4F

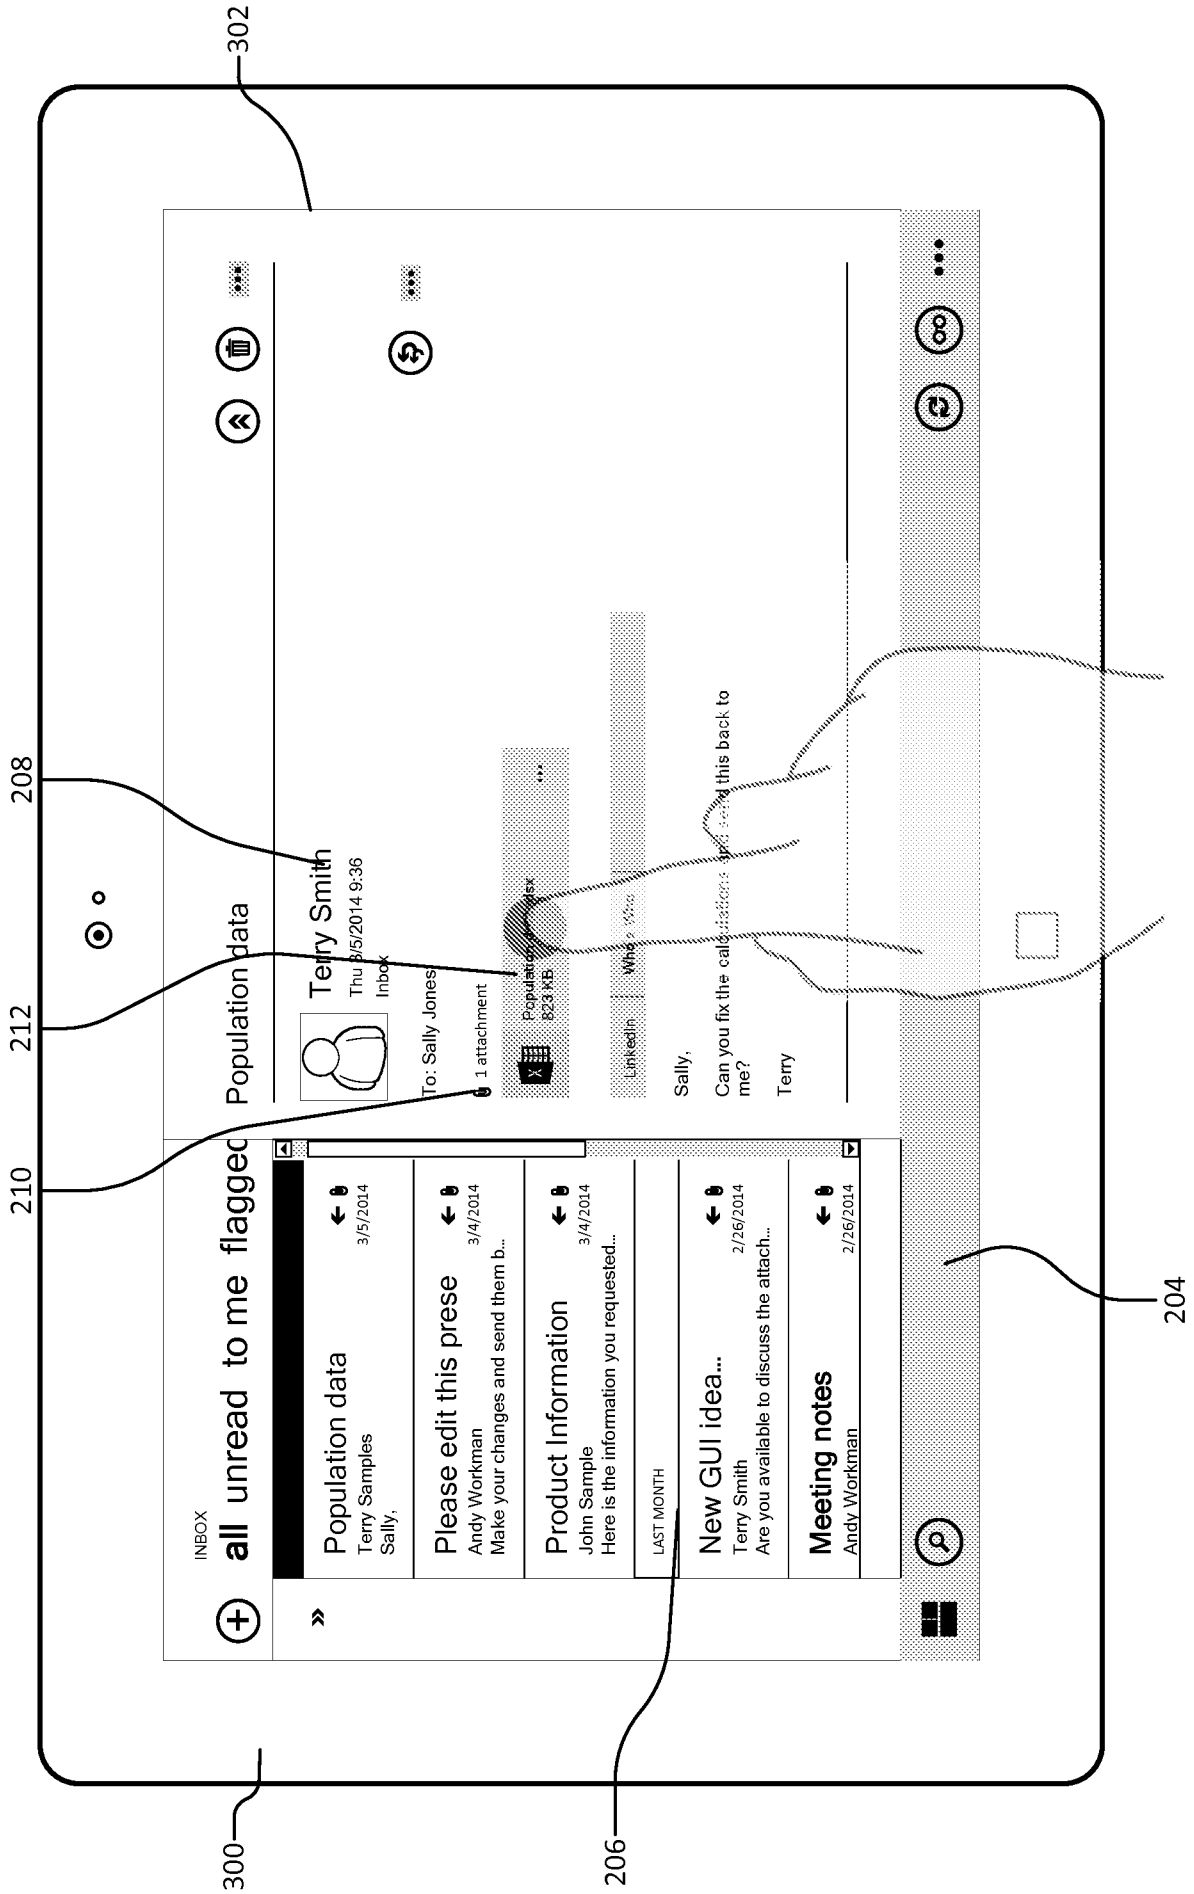


Fig. 5A

15/21

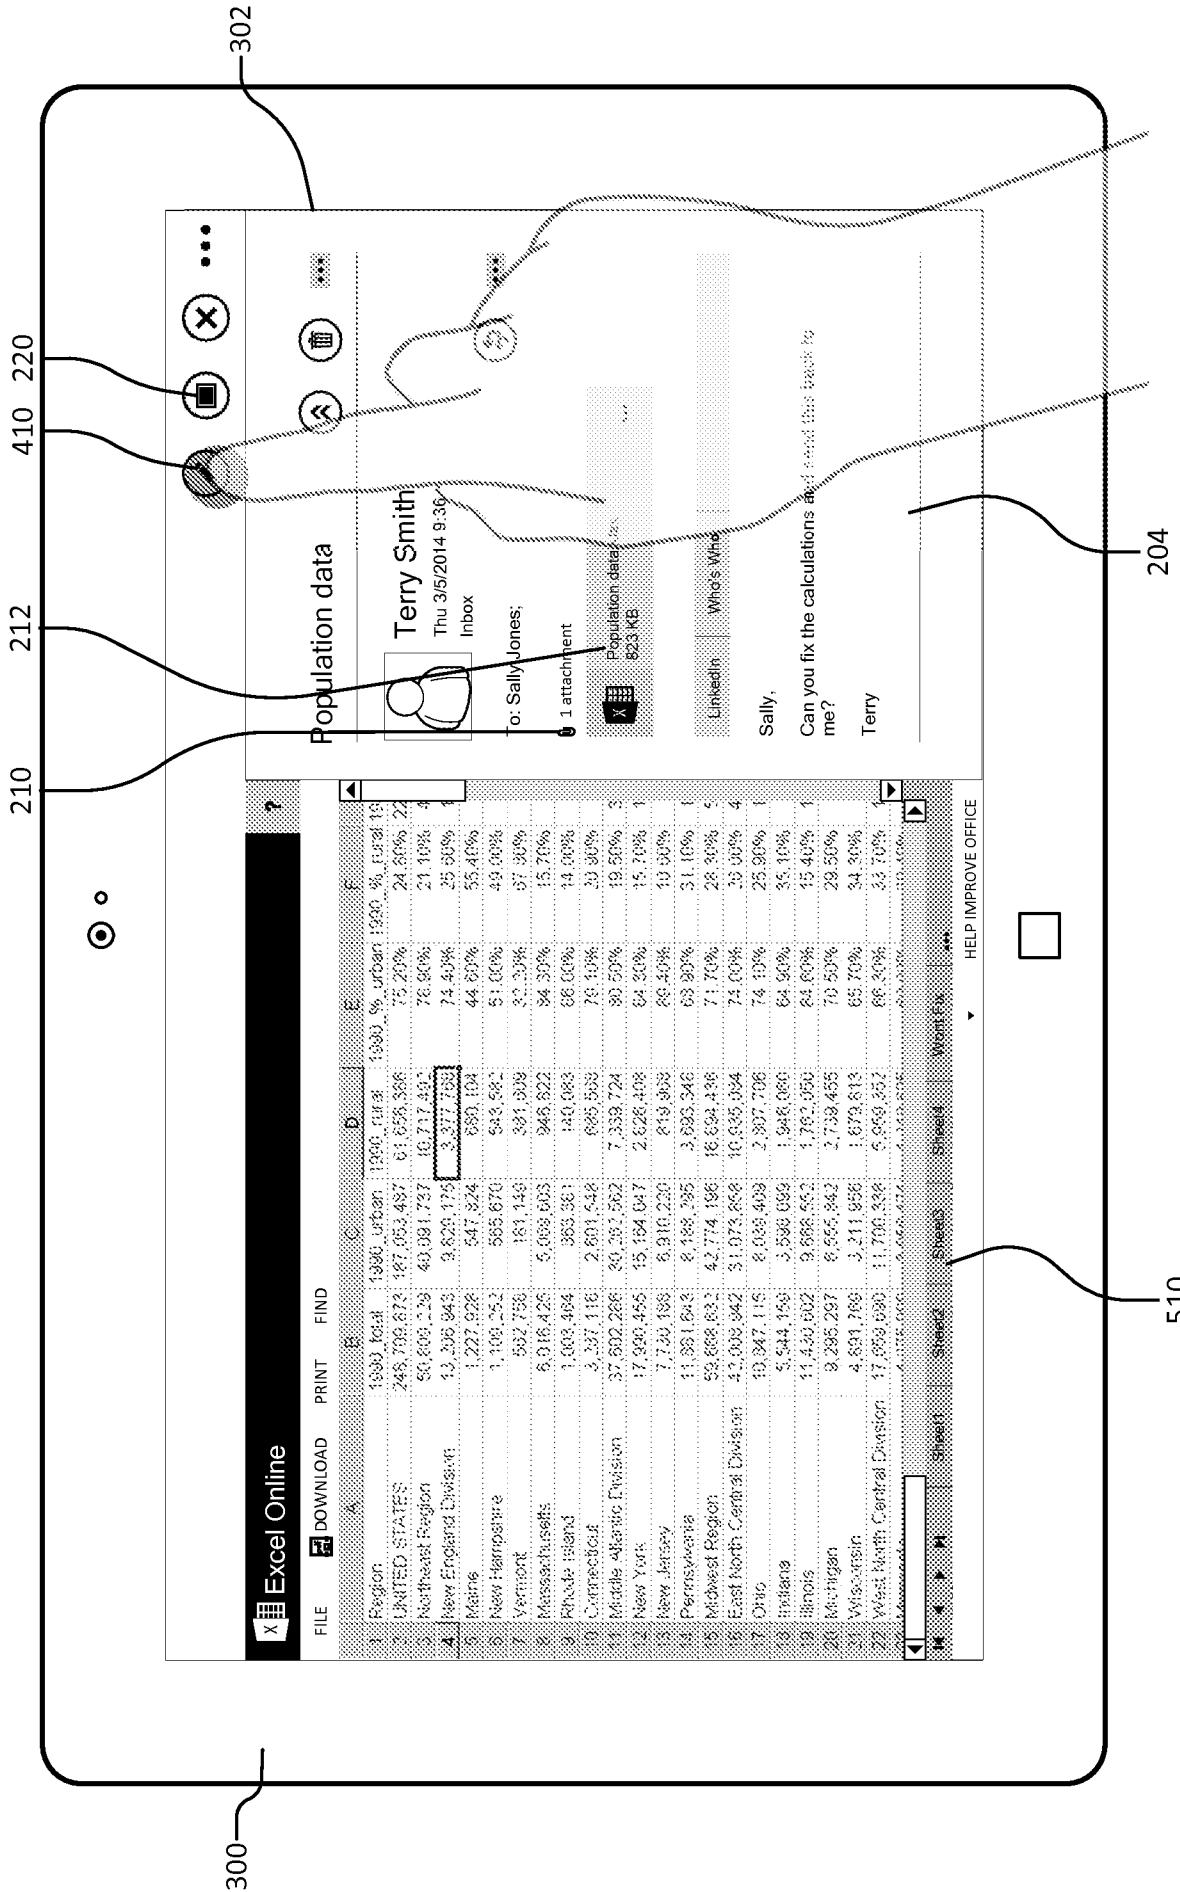


Fig. 5B

16/21

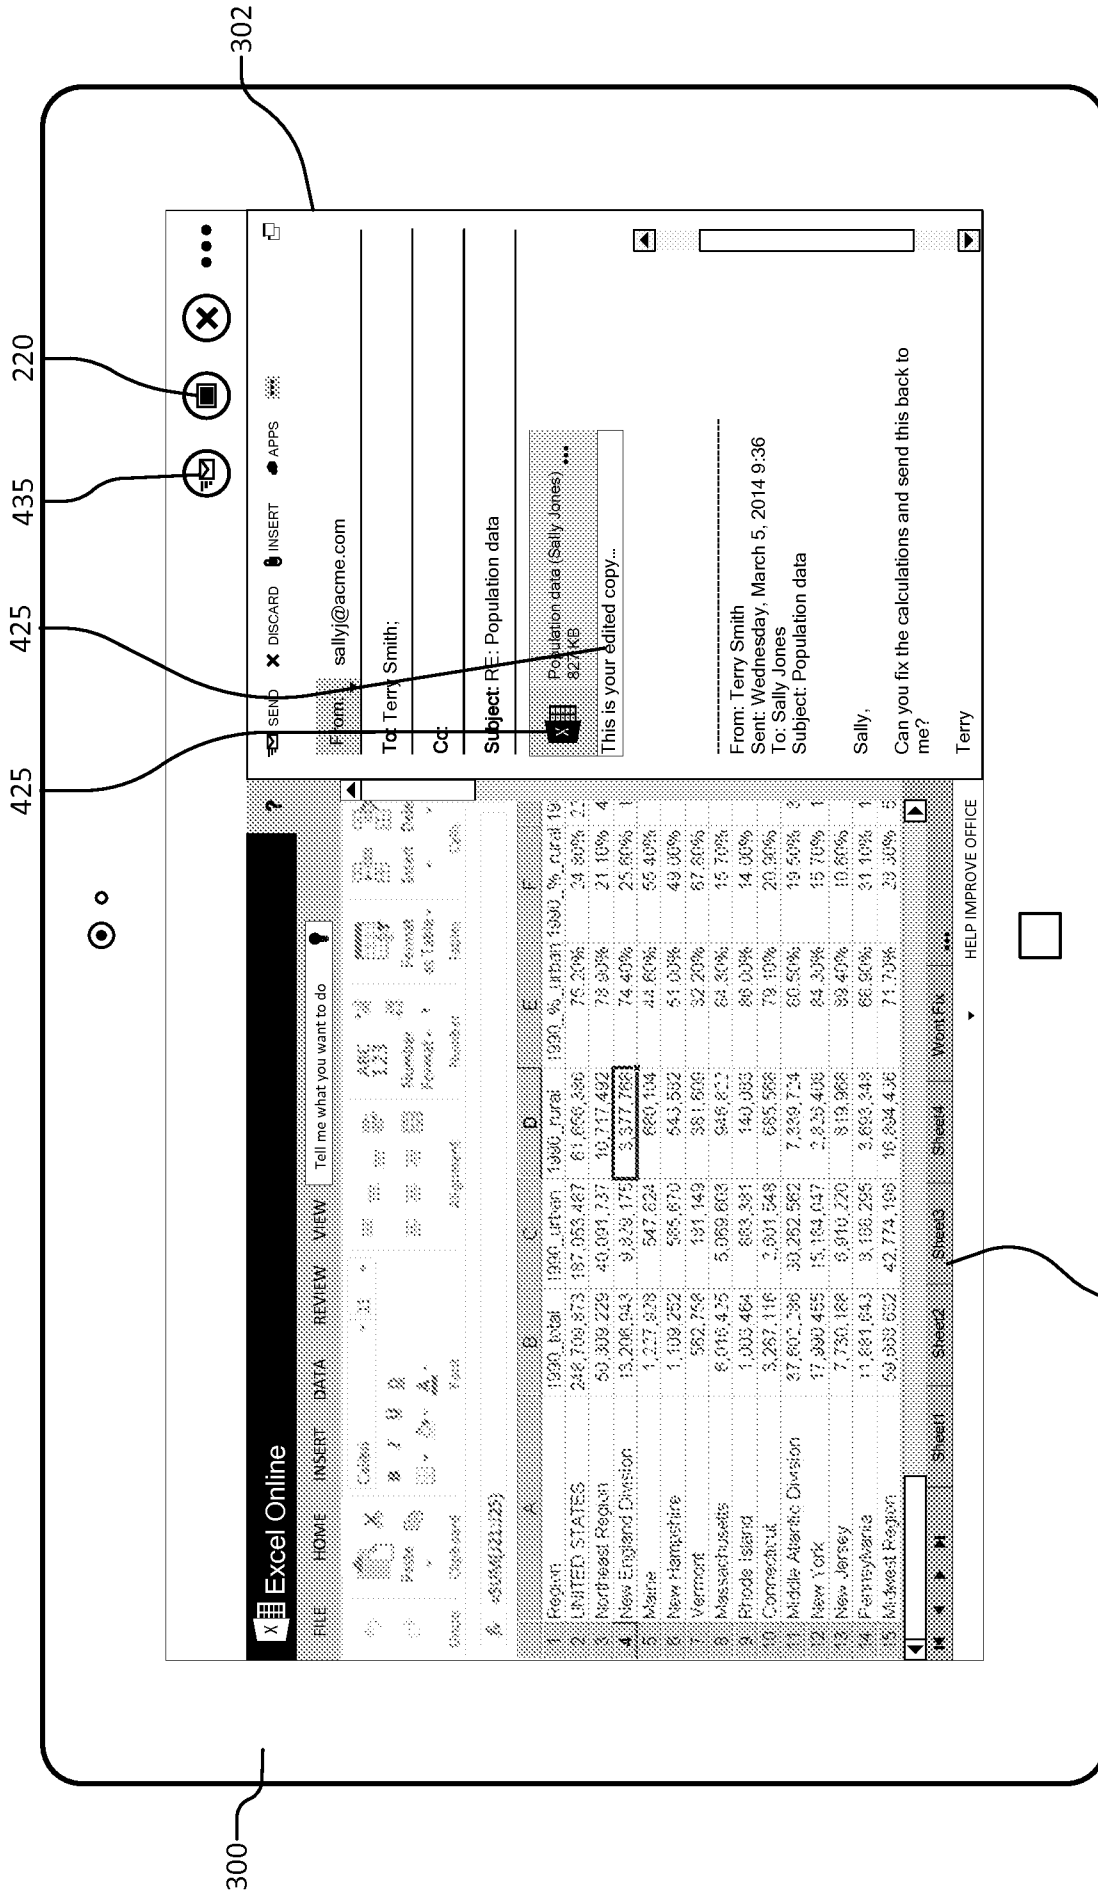


Fig. 5C

515

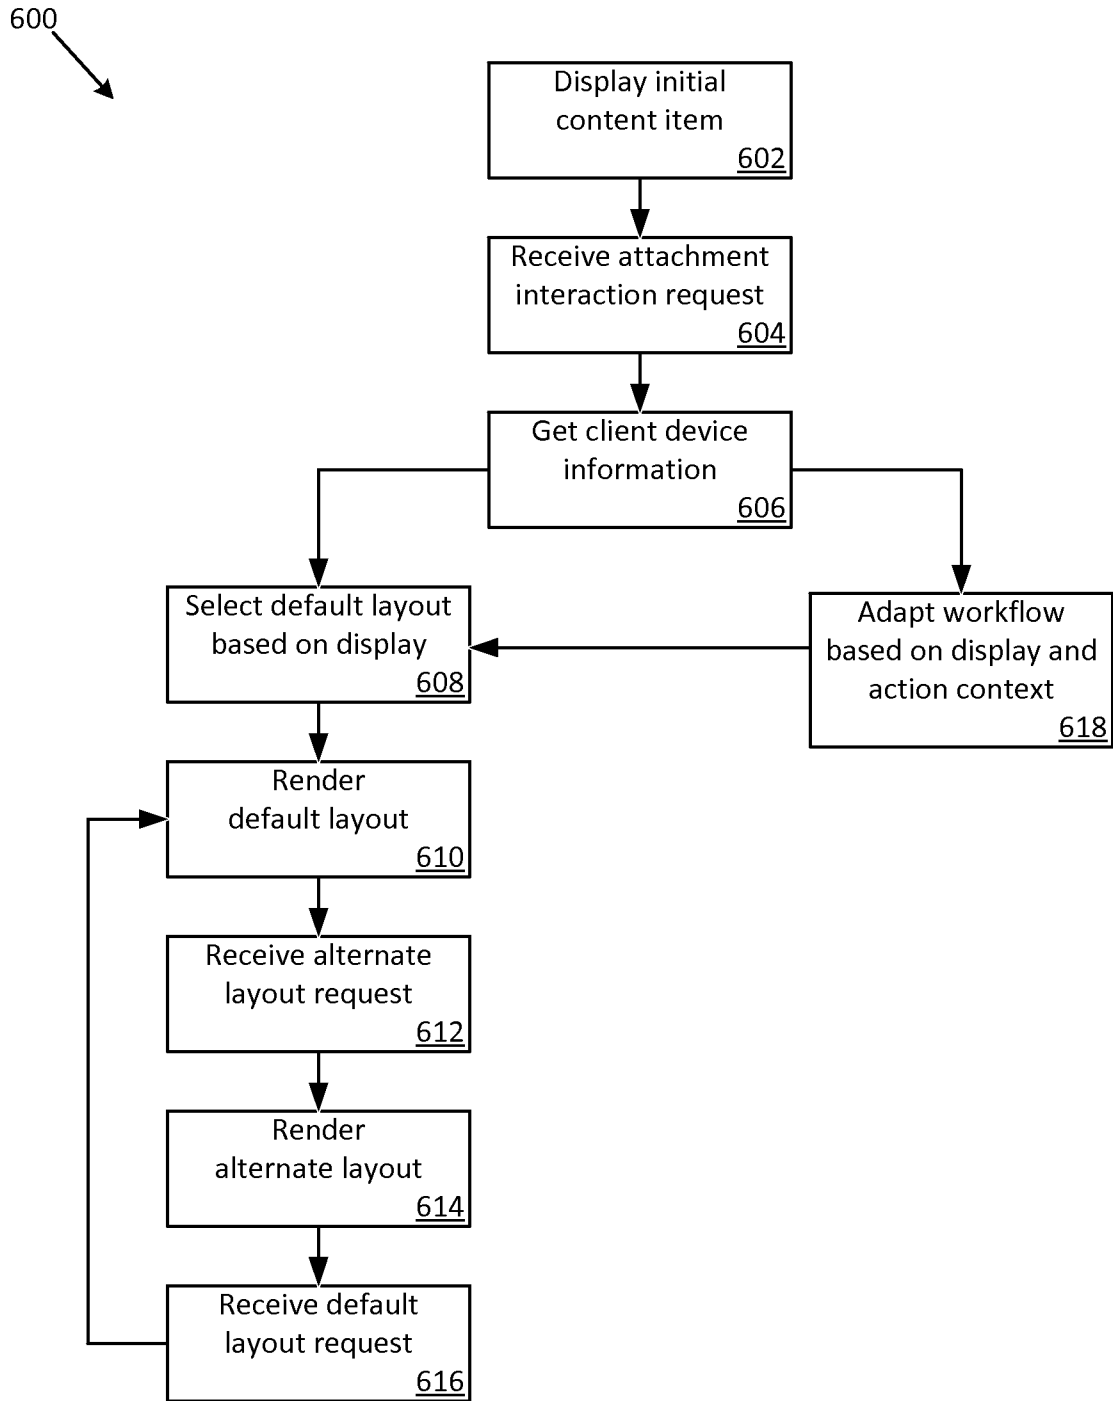


Fig. 6

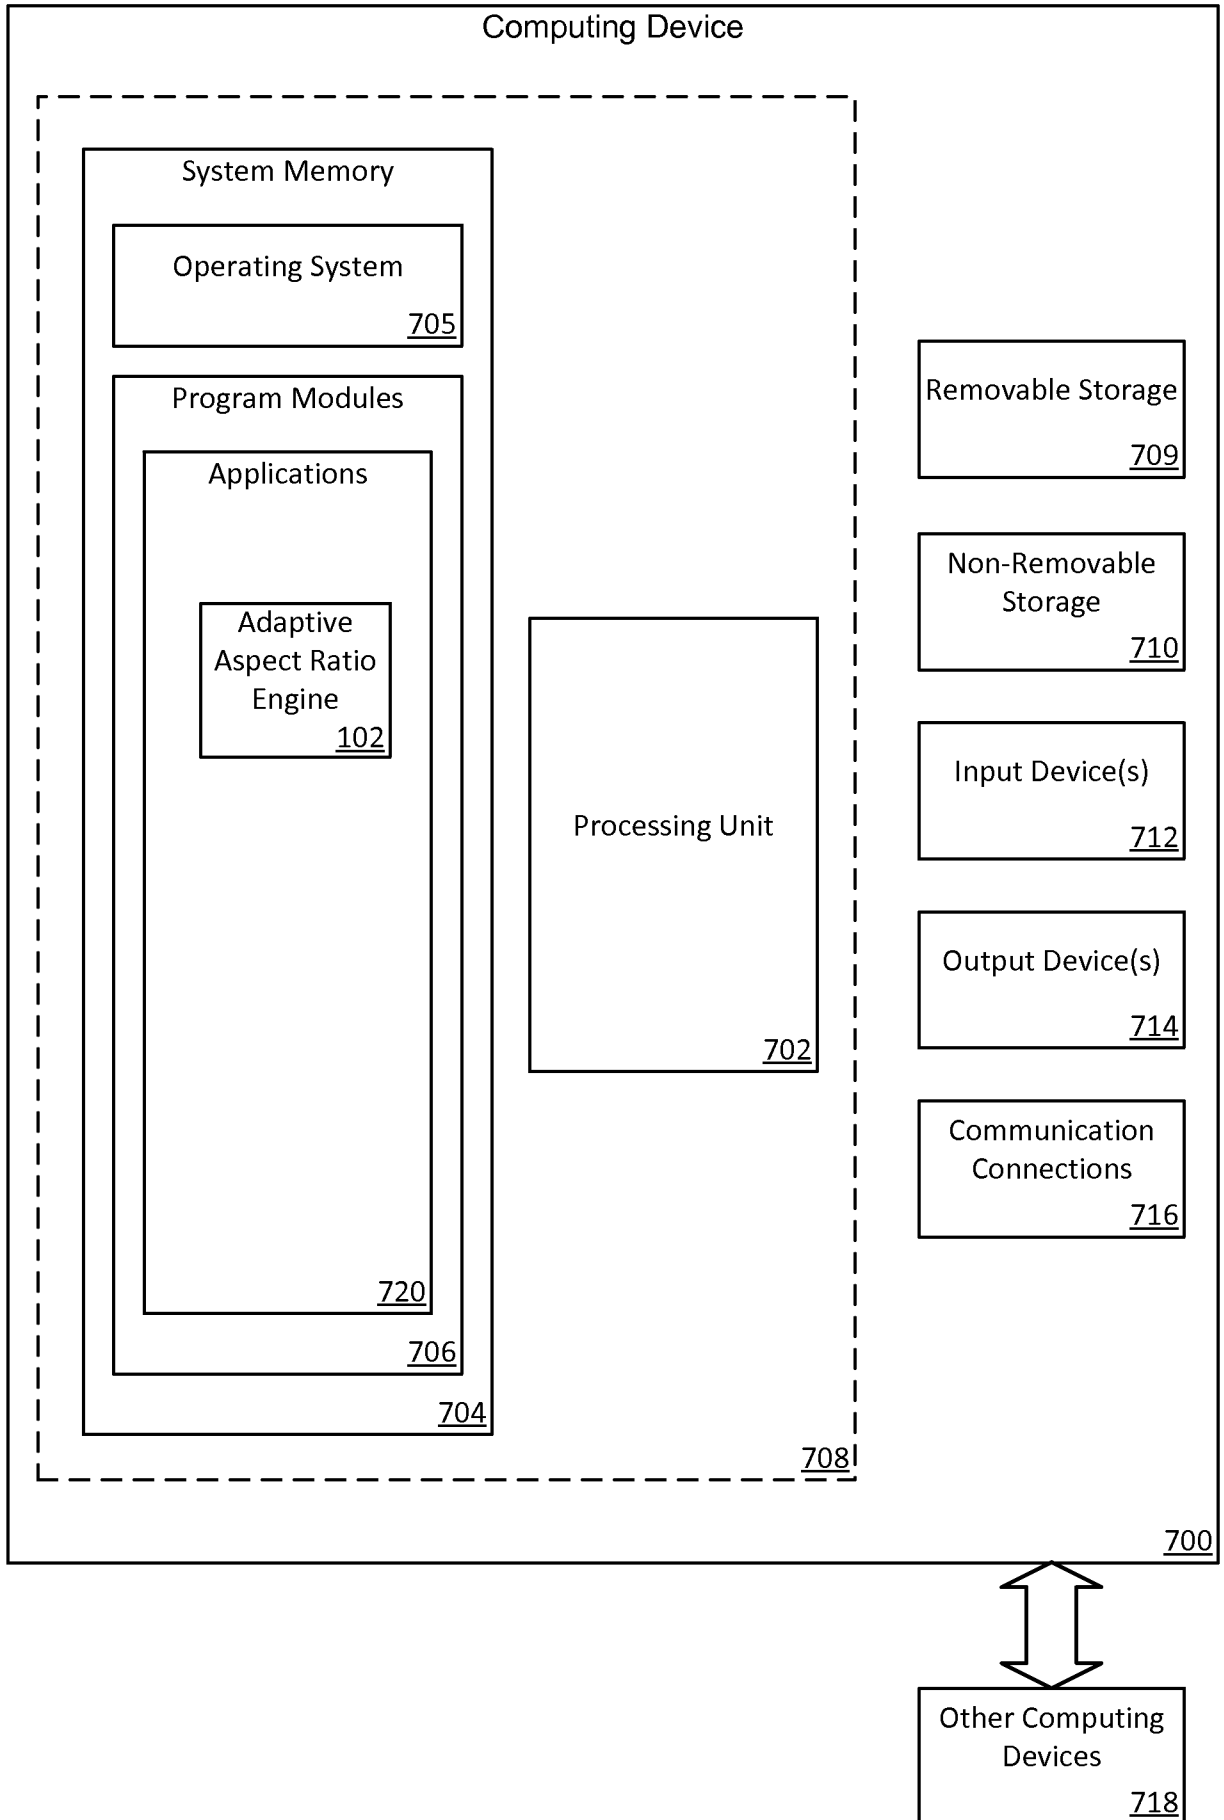


Fig. 7

19/21

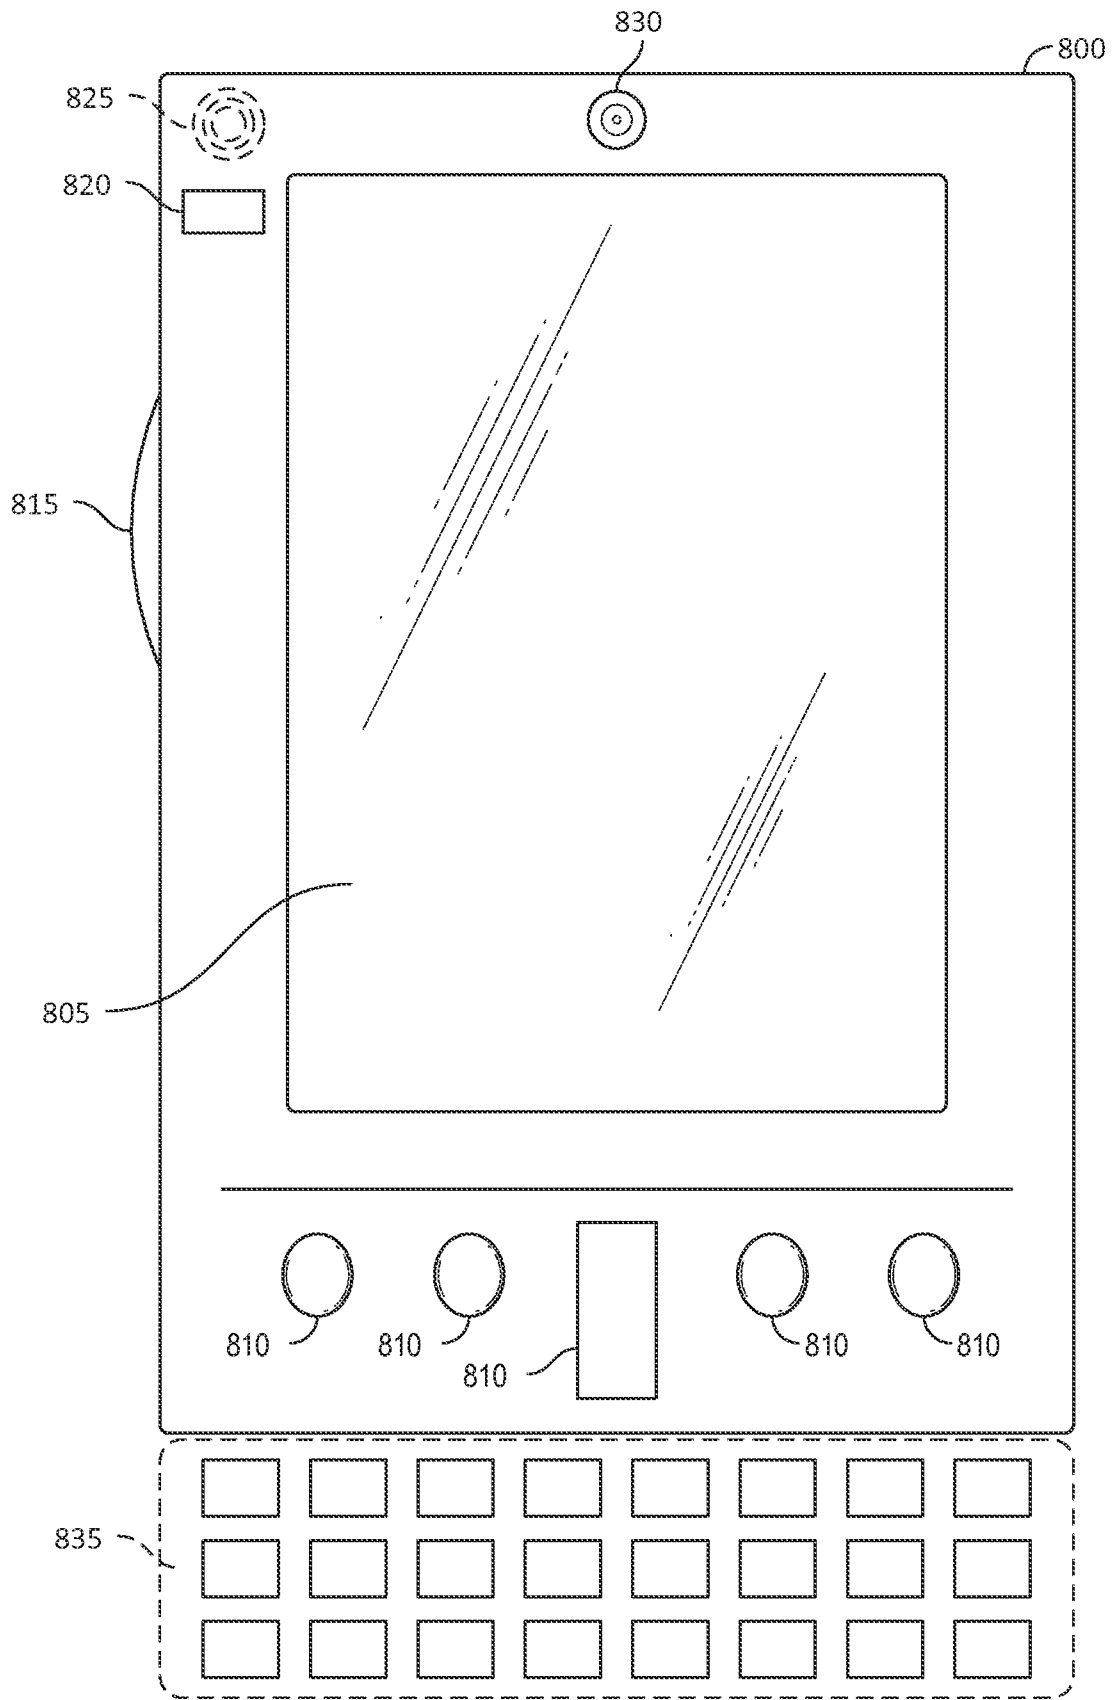


Fig. 8A

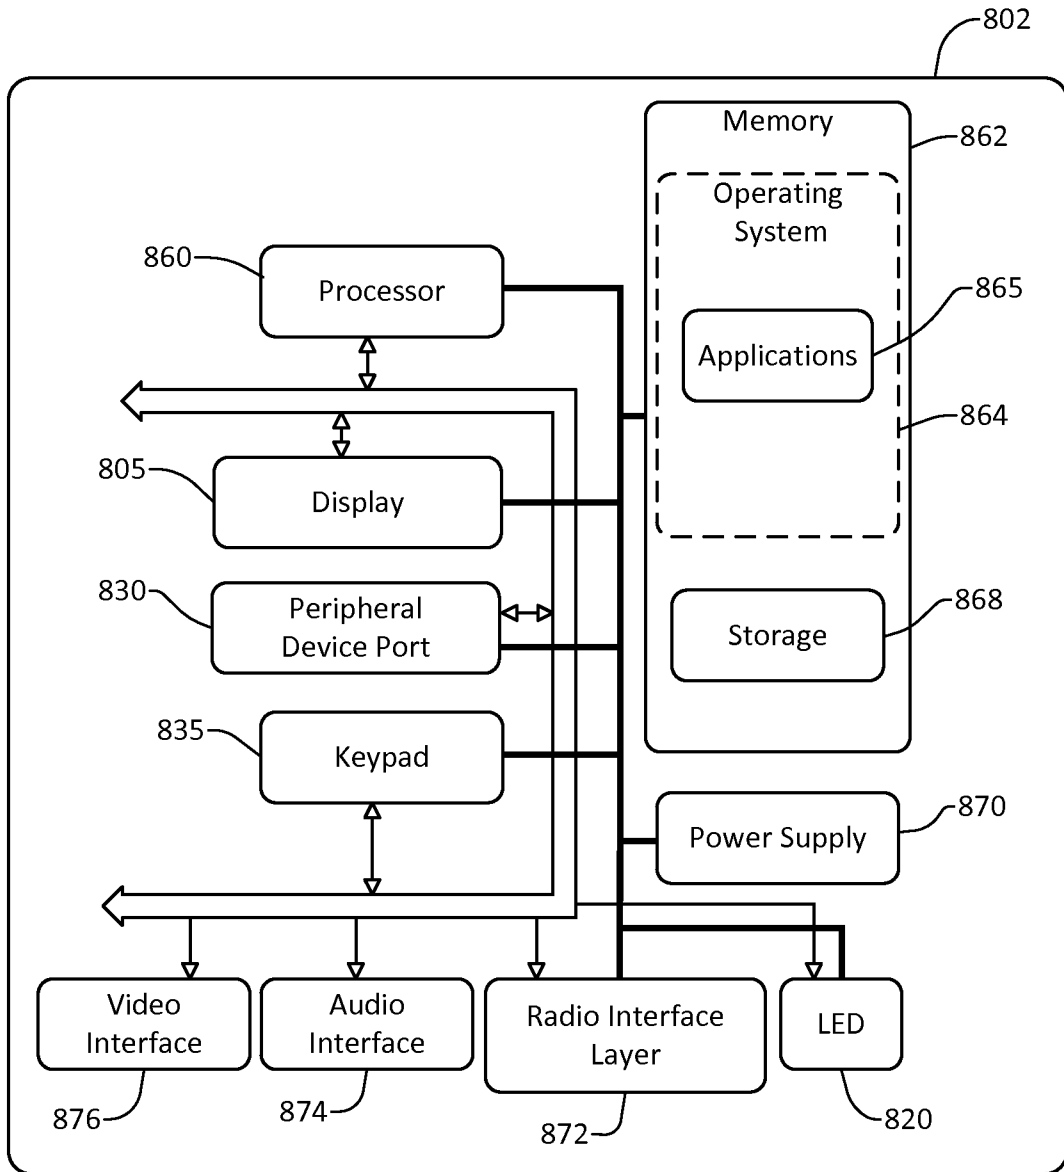


Fig. 8B

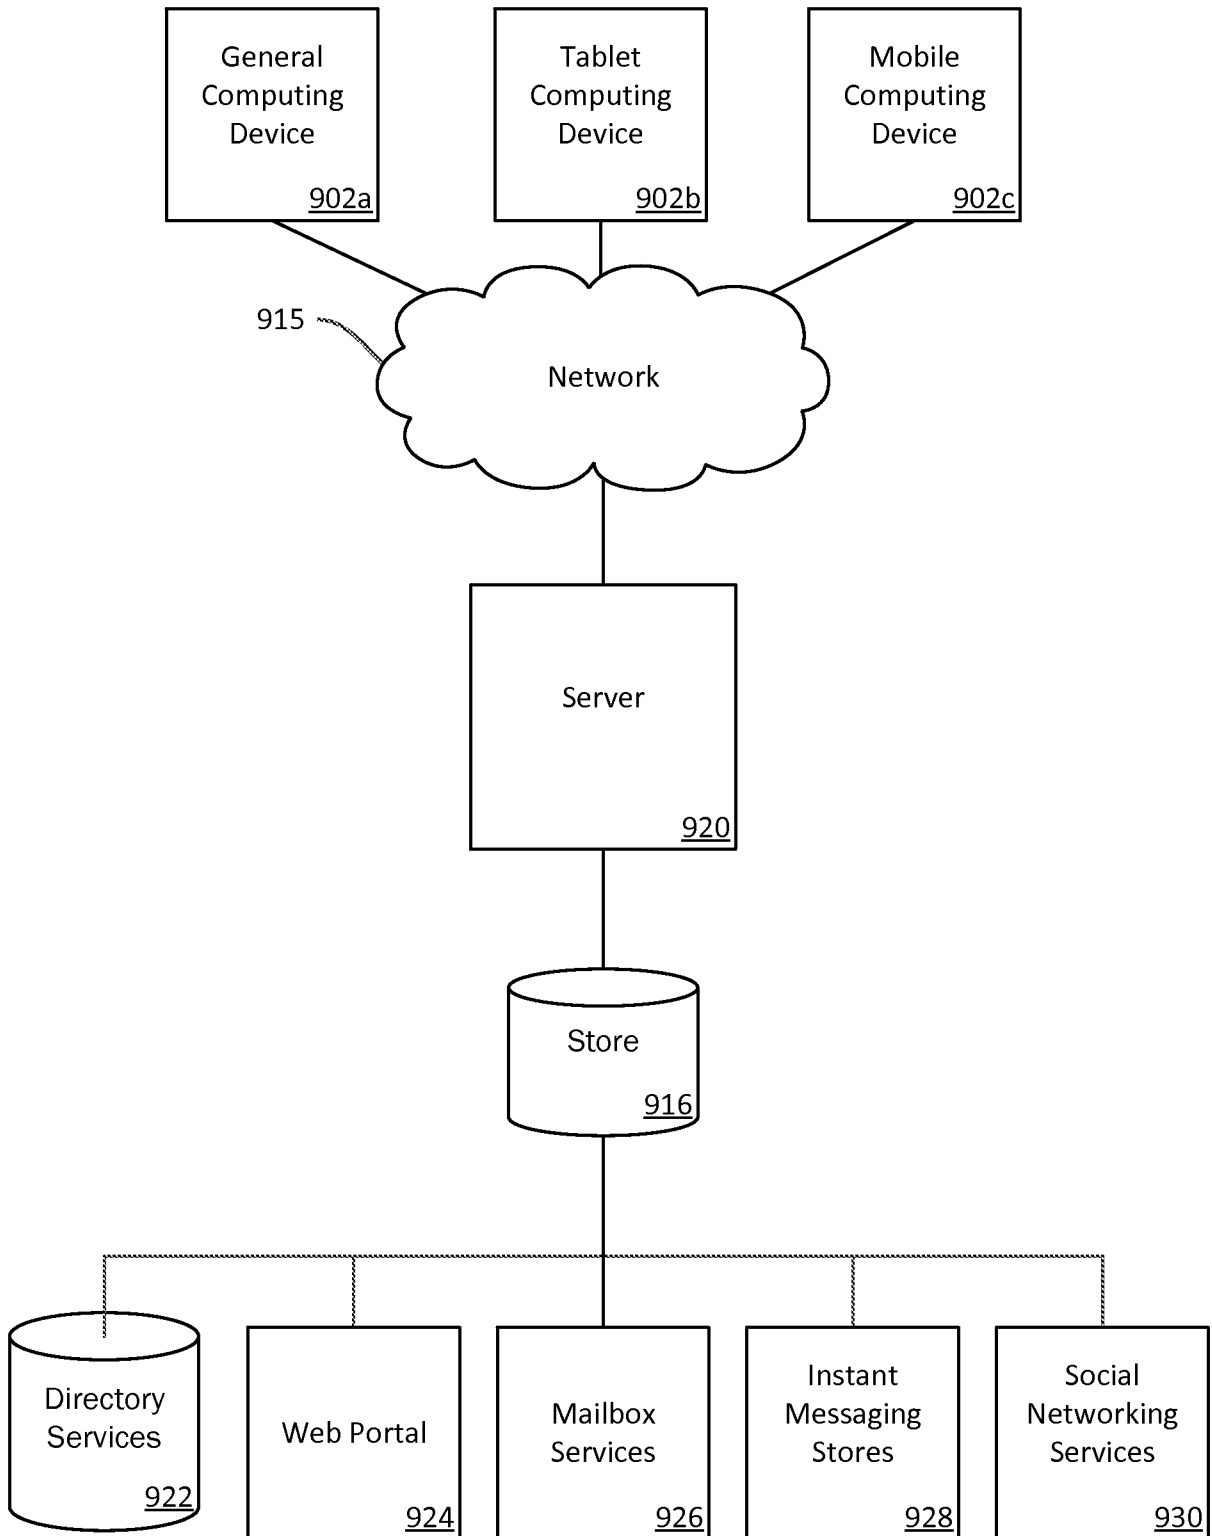


Fig. 9

INTERNATIONAL SEARCH REPORT

International application No PCT/US2015/022609

A. CLASSIFICATION OF SUBJECT MATTER INV. G06F3/048 G06Q10/10 ADD.				
According to International Patent Classification (IPC) or to both national classification and IPC				
B. FIELDS SEARCHED				
Minimum documentation searched (classification system followed by classification symbols) H04L G06F G06Q				
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched				
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) EPO-Internal, WPI Data				
C. DOCUMENTS CONSIDERED TO BE RELEVANT				
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.		
X	US 2012/284639 A1 (YUNIARDI NINO [US] ET AL) 8 November 2012 (2012-11-08)	7-15		
Y	paragraph [0008] - paragraph [0010] paragraph [0031] - paragraph [0041] -----	1-6		
Y	US 2013/076591 A1 (SIRPAL SANJIV [CA] ET AL) 28 March 2013 (2013-03-28) paragraph [0083] - paragraph [0094] paragraph [0243] paragraph [0250] paragraph [0275] - paragraph [0277] paragraph [0308] paragraph [0339] - paragraph [0343] ----- -/--	1-6		
<table style="width: 100%; border: none;"> <tr> <td style="width: 50%; border: none;"><input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C.</td> <td style="width: 50%; border: none;"><input checked="" type="checkbox"/> See patent family annex.</td> </tr> </table>			<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C.	<input checked="" type="checkbox"/> See patent family annex.
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C.	<input checked="" type="checkbox"/> See patent family annex.			
* Special categories of cited documents :				
"A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family			
Date of the actual completion of the international search	Date of mailing of the international search report			
10 June 2015	17/06/2015			
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer Agante da Silva, P			

INTERNATIONAL SEARCH REPORT

International application No PCT/US2015/022609

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2011/276897 A1 (CREVIER DANIEL W [US] ET AL) 10 November 2011 (2011-11-10) paragraph [0006] paragraph [0014] paragraph [0020] - paragraph [0022] paragraph [0025]	1-15
A	----- US 2013/332850 A1 (BOVET SIMON I [US] ET AL) 12 December 2013 (2013-12-12) paragraph [0007] - paragraph [0008] paragraph [0070] - paragraph [0073] -----	1-15

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No PCT/US2015/022609

Patent document cited in search report	A1	Publication date	Patent family member(s)	Publication date
US 2012284639	A1	08-11-2012	NONE	

US 2013076591	A1	28-03-2013	US 2013076591 A1	28-03-2013
			US 2013076595 A1	28-03-2013
			US 2013076596 A1	28-03-2013
			US 2013076597 A1	28-03-2013
			US 2013076598 A1	28-03-2013
			US 2013076632 A1	28-03-2013
			US 2013076637 A1	28-03-2013
			US 2013076638 A1	28-03-2013
			US 2013076653 A1	28-03-2013
			US 2013076654 A1	28-03-2013
			US 2013076655 A1	28-03-2013
			US 2013076656 A1	28-03-2013
			US 2013076657 A1	28-03-2013
			US 2013076658 A1	28-03-2013
			US 2013076660 A1	28-03-2013
			US 2013076661 A1	28-03-2013
			US 2013076662 A1	28-03-2013
			US 2013076663 A1	28-03-2013
			US 2013076664 A1	28-03-2013
			US 2013076665 A1	28-03-2013
			US 2013076672 A1	28-03-2013
			US 2013076673 A1	28-03-2013
			US 2013076677 A1	28-03-2013
			US 2013076678 A1	28-03-2013
			US 2013076679 A1	28-03-2013
			US 2013076680 A1	28-03-2013
			US 2013076681 A1	28-03-2013
			US 2013076682 A1	28-03-2013
			US 2013076683 A1	28-03-2013
			US 2013076715 A1	28-03-2013
			US 2013076718 A1	28-03-2013
			US 2013076780 A1	28-03-2013
			US 2013076781 A1	28-03-2013
			US 2013076782 A1	28-03-2013
			US 2013076793 A1	28-03-2013
			US 2013076795 A1	28-03-2013
			US 2013076929 A1	28-03-2013
			US 2013076961 A1	28-03-2013
			US 2013076963 A1	28-03-2013
			US 2013076964 A1	28-03-2013
			US 2013077221 A1	28-03-2013
			US 2013077236 A1	28-03-2013
			US 2013077260 A1	28-03-2013
			US 2013078959 A1	28-03-2013
			US 2013078994 A1	28-03-2013
			US 2013078995 A1	28-03-2013
			US 2013079054 A1	28-03-2013
			US 2013079055 A1	28-03-2013
			US 2013079062 A1	28-03-2013
			US 2013079063 A1	28-03-2013
			US 2013080759 A1	28-03-2013
			US 2013080929 A1	28-03-2013
			US 2013080931 A1	28-03-2013
			US 2013080932 A1	28-03-2013
			US 2013080933 A1	28-03-2013
			US 2013080934 A1	28-03-2013

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2015/022609

Patent document cited in search report	Publication date	Patent family member(s)	Publication date	
		US 2013080935 A1	28-03-2013	
		US 2013080936 A1	28-03-2013	
		US 2013080937 A1	28-03-2013	
		US 2013080938 A1	28-03-2013	
		US 2013080939 A1	28-03-2013	
		US 2013080945 A1	28-03-2013	
		US 2013080956 A1	28-03-2013	
		US 2013080957 A1	28-03-2013	
		US 2013080958 A1	28-03-2013	
		US 2013080970 A1	28-03-2013	
		US 2013082585 A1	04-04-2013	
		US 2013082955 A1	04-04-2013	
		US 2013082957 A1	04-04-2013	
		US 2013082958 A1	04-04-2013	
		US 2013083242 A1	04-04-2013	
		US 2013083464 A1	04-04-2013	
		US 2013083466 A1	04-04-2013	
		US 2013083467 A1	04-04-2013	
		US 2013083468 A1	04-04-2013	
		US 2013083469 A1	04-04-2013	
		US 2013083470 A1	04-04-2013	
		US 2013083477 A1	04-04-2013	
		US 2013083558 A1	04-04-2013	
		US 2013086480 A1	04-04-2013	
		US 2013086492 A1	04-04-2013	
		US 2013086493 A1	04-04-2013	
		US 2013086494 A1	04-04-2013	
		US 2013086505 A1	04-04-2013	
		US 2013088411 A1	11-04-2013	
		US 2013088446 A1	11-04-2013	
		US 2013088447 A1	11-04-2013	
		US 2013091439 A1	11-04-2013	
		US 2013097532 A1	18-04-2013	
		US 2013100001 A1	25-04-2013	
		US 2013113835 A1	09-05-2013	
		US 2013187831 A1	25-07-2013	
		US 2013219162 A1	22-08-2013	
		US 2015009237 A1	08-01-2015	
		US 2015087355 A1	26-03-2015	
		WO 2013046027 A1	04-04-2013	

US 2011276897	A1	10-11-2011	CN 102859513 A	02-01-2013
			EP 2567325 A2	13-03-2013
			US 2011276897 A1	10-11-2011
			WO 2011139802 A2	10-11-2011

US 2013332850	A1	12-12-2013	NONE	
