



US 20150193536A1

(19) **United States**
(12) **Patent Application Publication**
Malik

(10) **Pub. No.: US 2015/0193536 A1**
(43) **Pub. Date: Jul. 9, 2015**

(54) **METHODS, SYSTEMS, AND PRODUCTS FOR ASSESSING RISKS OF INTERNET SEARCHES**

Jun. 15, 2012, now Pat. No. 8,489,593, which is a continuation of application No. 12/205,377, filed on Sep. 5, 2008, now Pat. No. 8,229,926, which is a continuation of application No. 10/820,411, filed on Apr. 8, 2004, now Pat. No. 7,433,864.

(71) Applicant: **AT&T Intellectual Property I, L.P.**, Atlanta, GA (US)

(72) Inventor: **Dale W. Malik**, Dunwoody, GA (US)

(73) Assignee: **AT&T INTELLECTUAL PROPERTY I, L.P.**, Atlanta, GA (US)

(21) Appl. No.: **14/664,814**

(22) Filed: **Mar. 21, 2015**

Publication Classification


(51) **Int. Cl.**
G06F 17/30 (2006.01)
G06F 21/62 (2006.01)
(52) **U.S. Cl.**
CPC **G06F 17/30864** (2013.01); **G06F 21/6245** (2013.01)

Related U.S. Application Data

(63) Continuation of application No. 13/916,640, filed on Jun. 13, 2013, now Pat. No. 9,015,157, which is a continuation of application No. 13/524,074, filed on

(57) **ABSTRACT**

A risk associated with an Internet search is determined. Once a search result of the Internet search has been obtained, the risk is determined based on the search result.

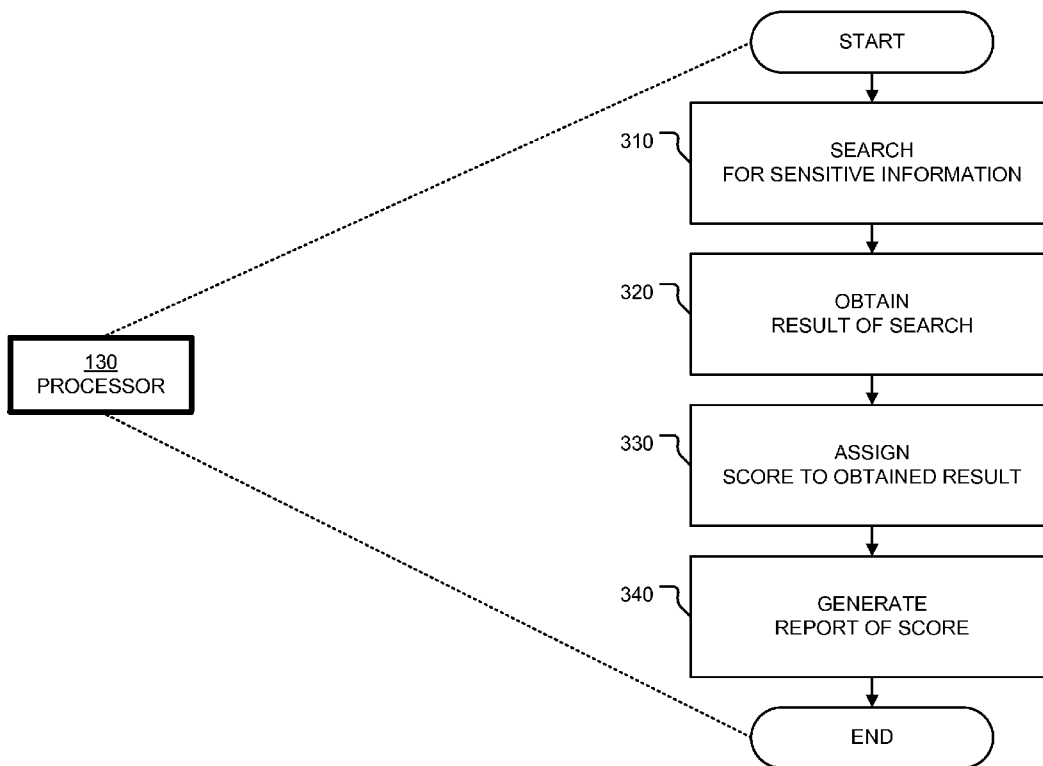

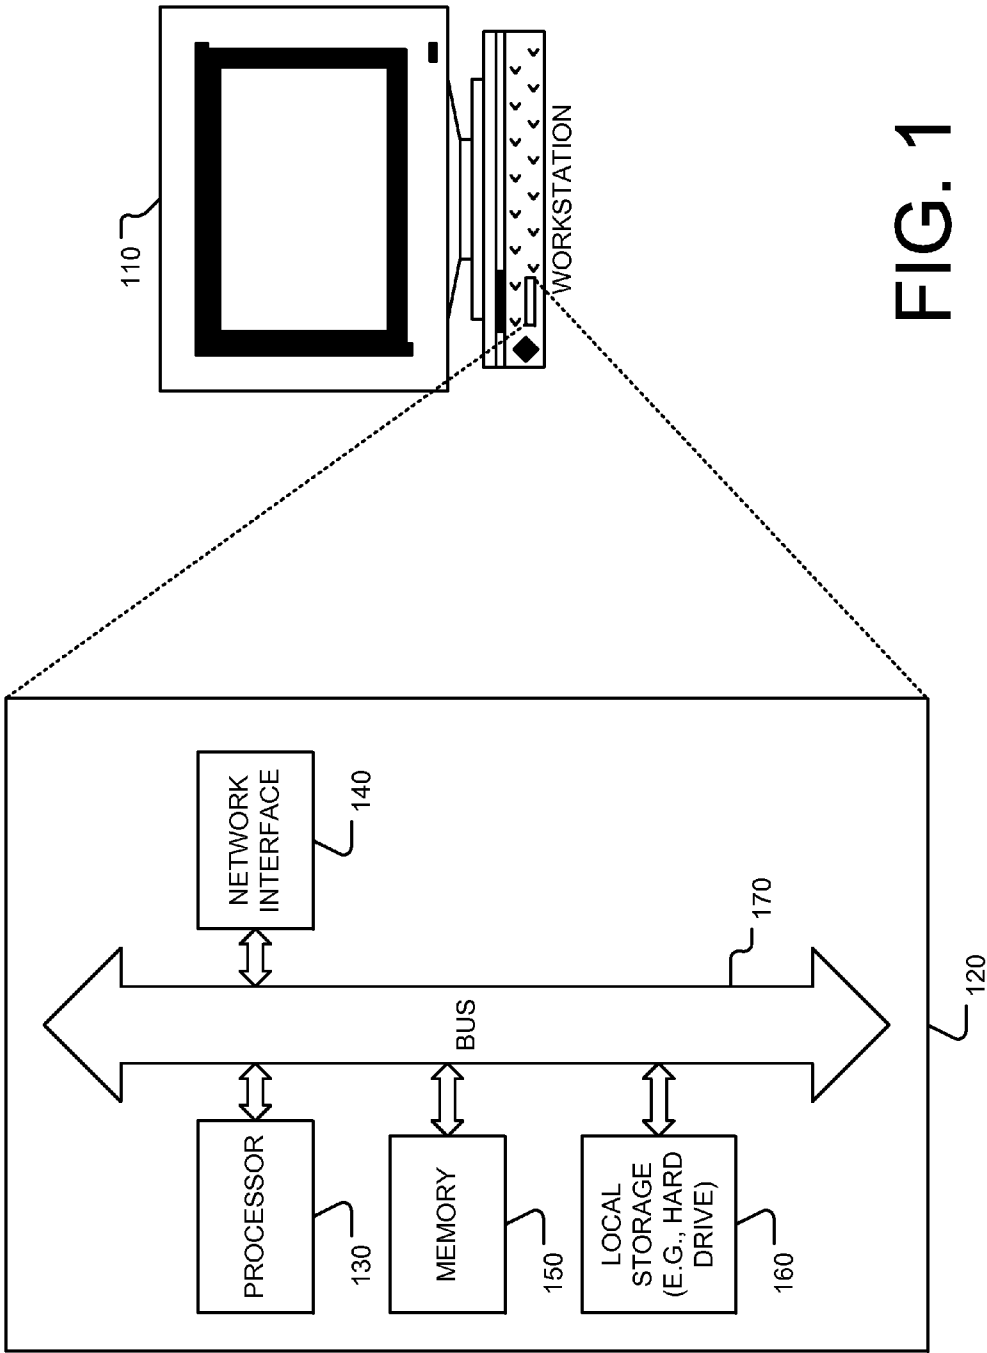


FIG. 1

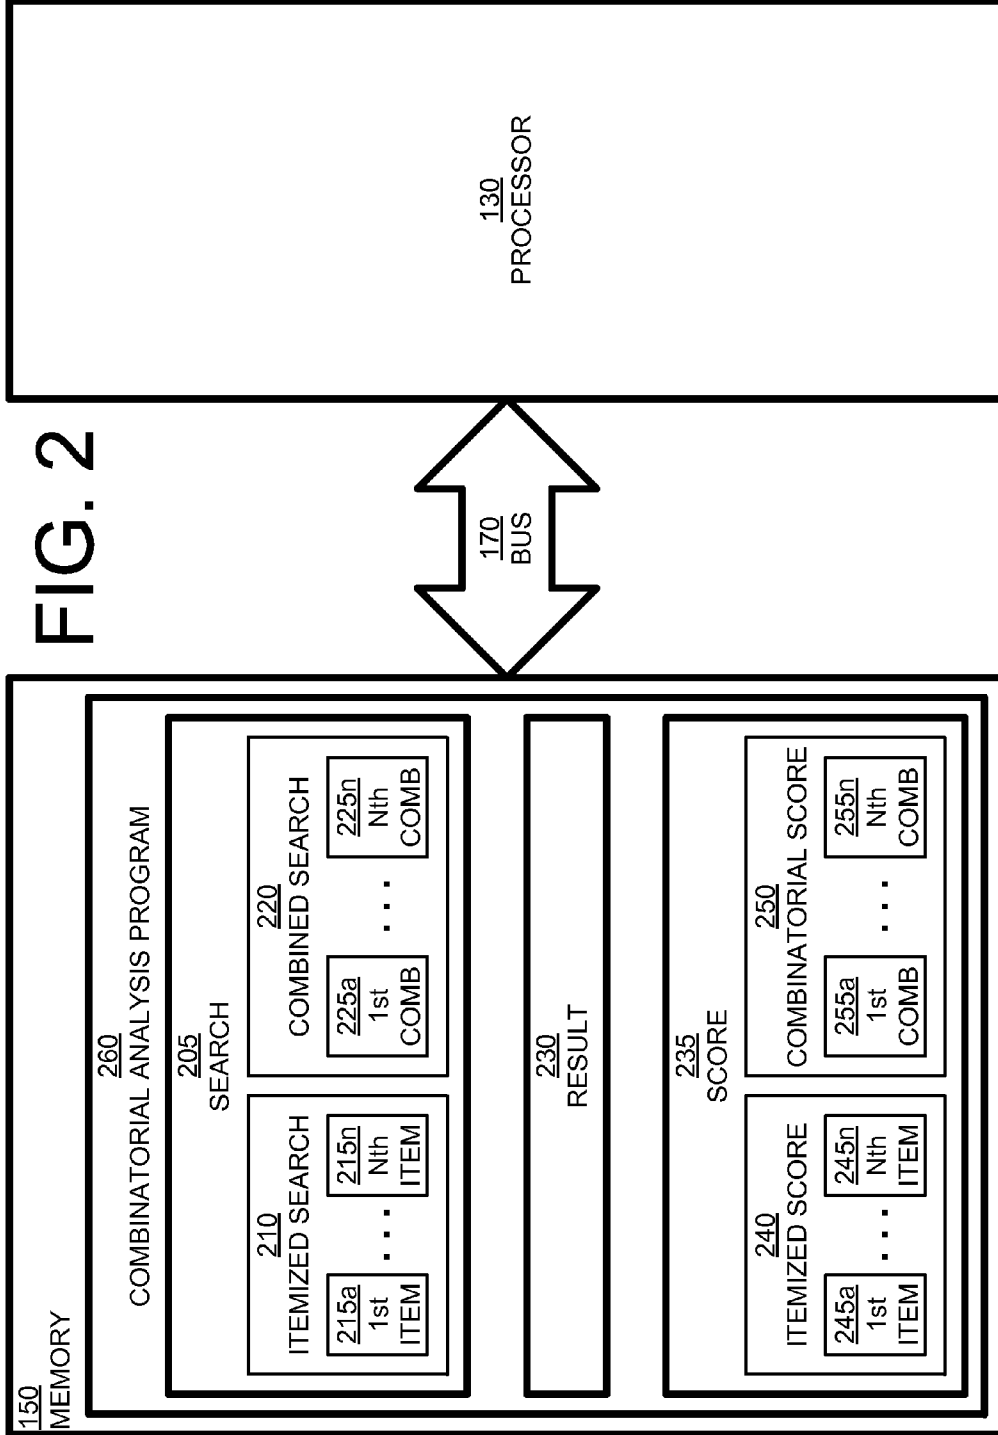


FIG. 2

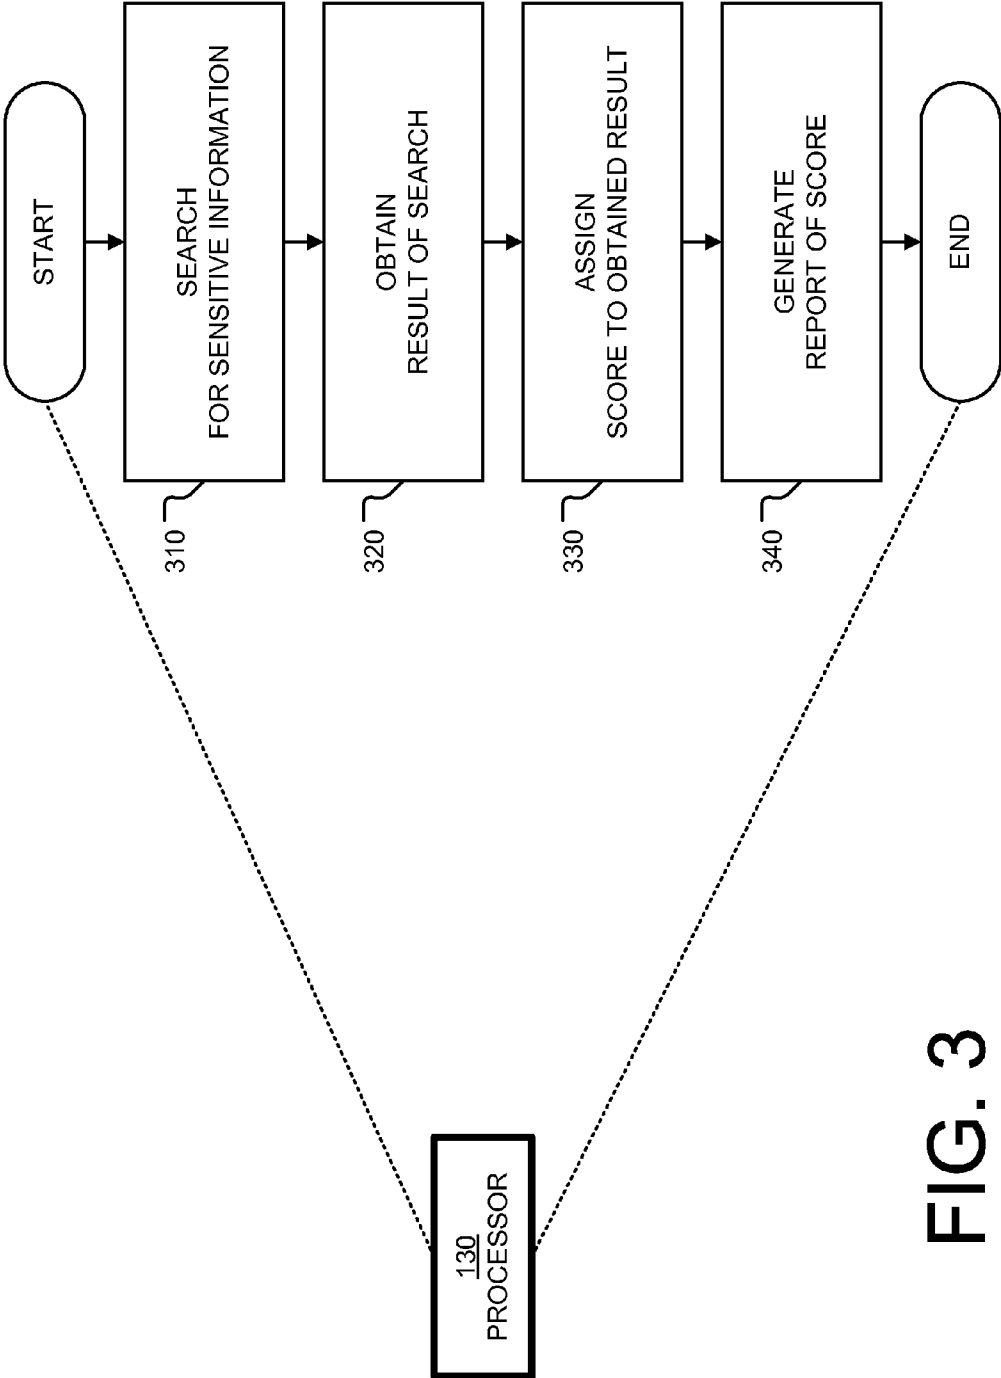


FIG. 3

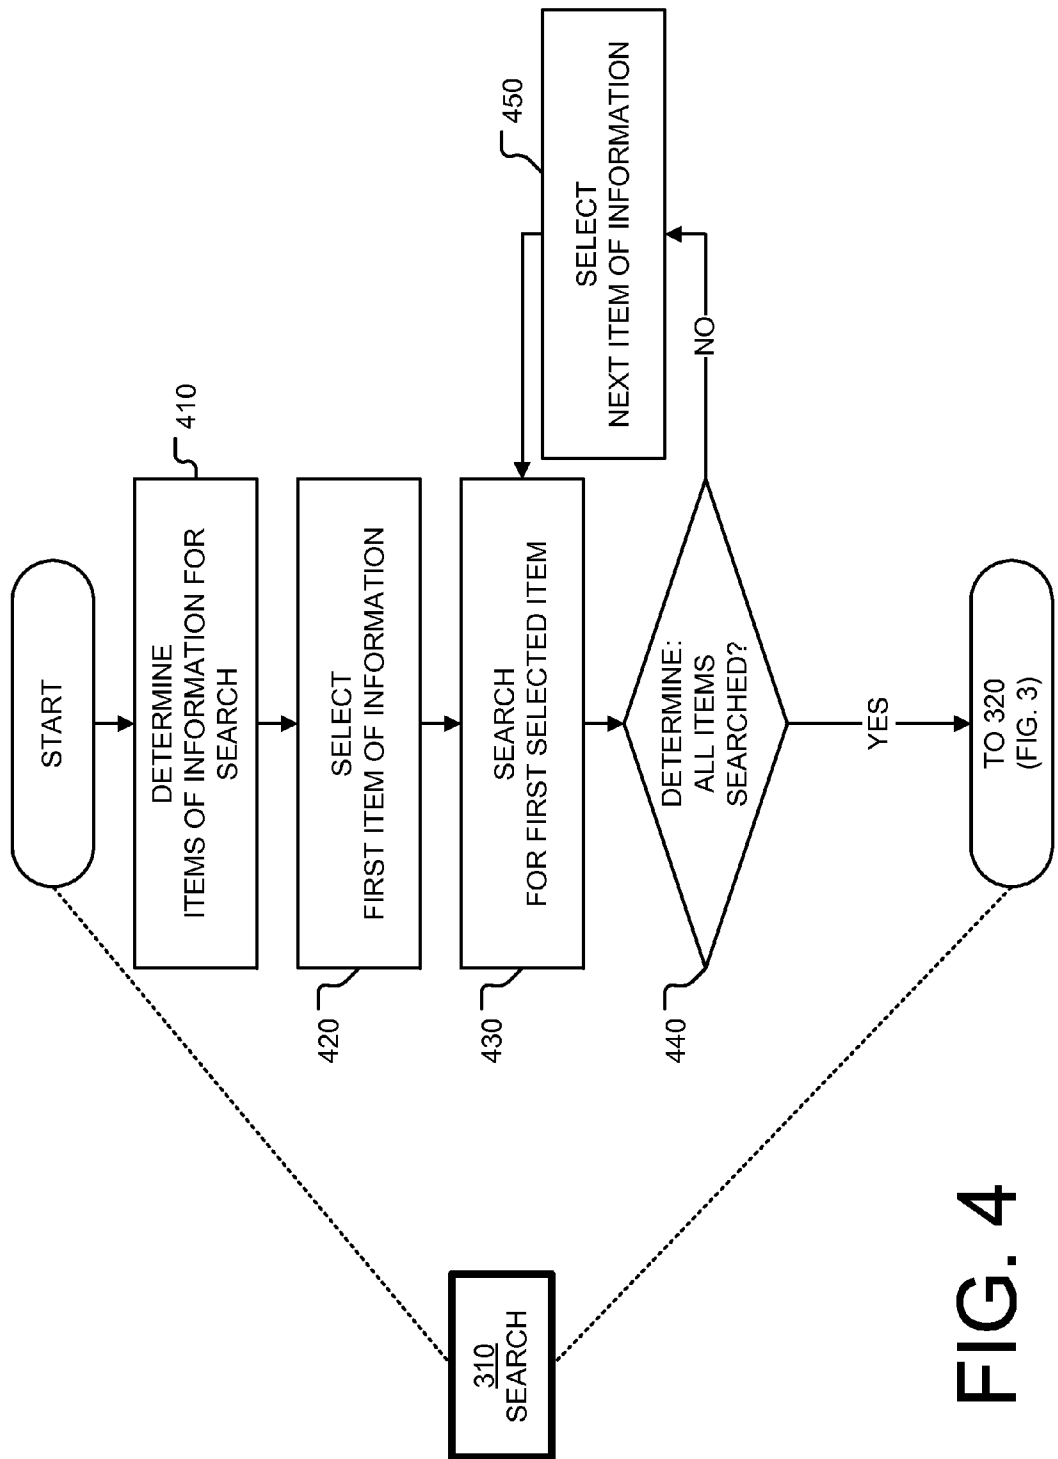


FIG. 4

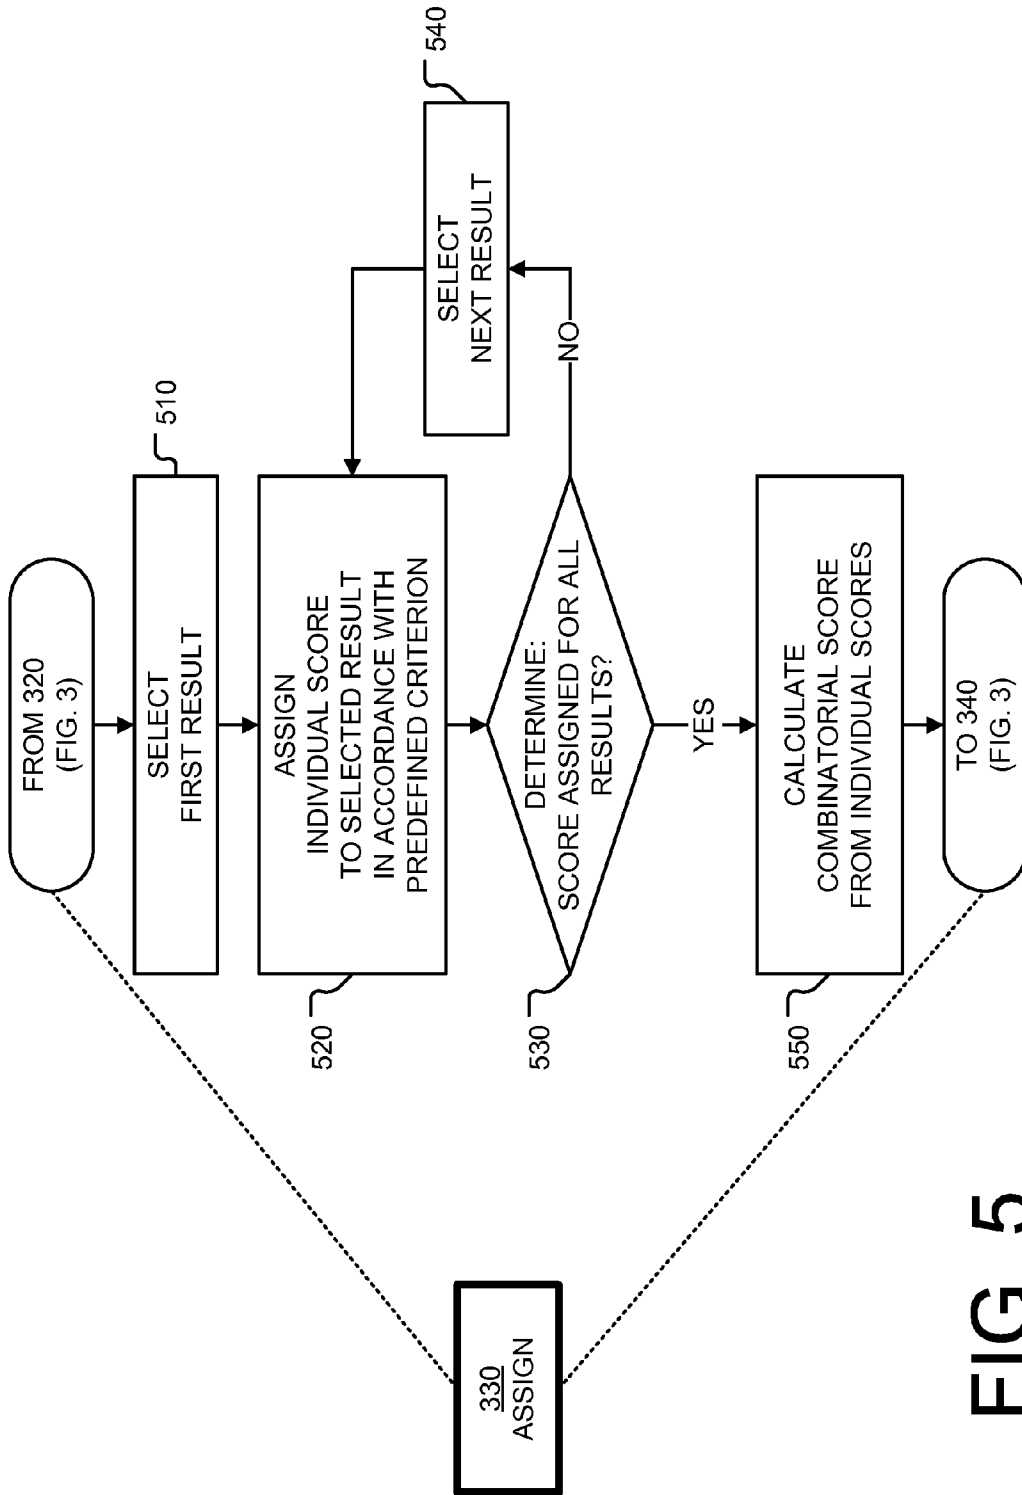


FIG. 5

RESULTS (RAW DATA - INDIVIDUAL ITEMS)


<u>CRITERIA</u>	<u>ITEM</u>	<u>SCORE</u>
Name	Bob Smith	34 hit(s)
Social Security Number	123-45-6789	0 hit(s)
Email Address	bsmith@bob.smith.com	842 hit(s)
Telephone Number	(404) 555 - 1234	4 hit(s)
Street Address	123 Peachtree Street	2 hit(s)

FIG. 6A

RESULTS (RAW DATA - COMBINED ITEMS)

<u>COMBINATIONS</u>	<u>SCORE</u>
Combination of Name and: Social Security Number	0 hit(s)
Email Address	28 hit(s)
Telephone Number	3 hit(s)
Street Address	2 hit(s)
Combination of Social Security Number and: Email Address	0 hit(s)
Telephone Number	0 hit(s)
Street Address	0 hit(s)
Combination of Email Address and: Telephone Number	1 hit(s)
Street Address	0 hit(s)
Combination of Telephone Number and: Street Address	1 hit(s)

FIG. 6B

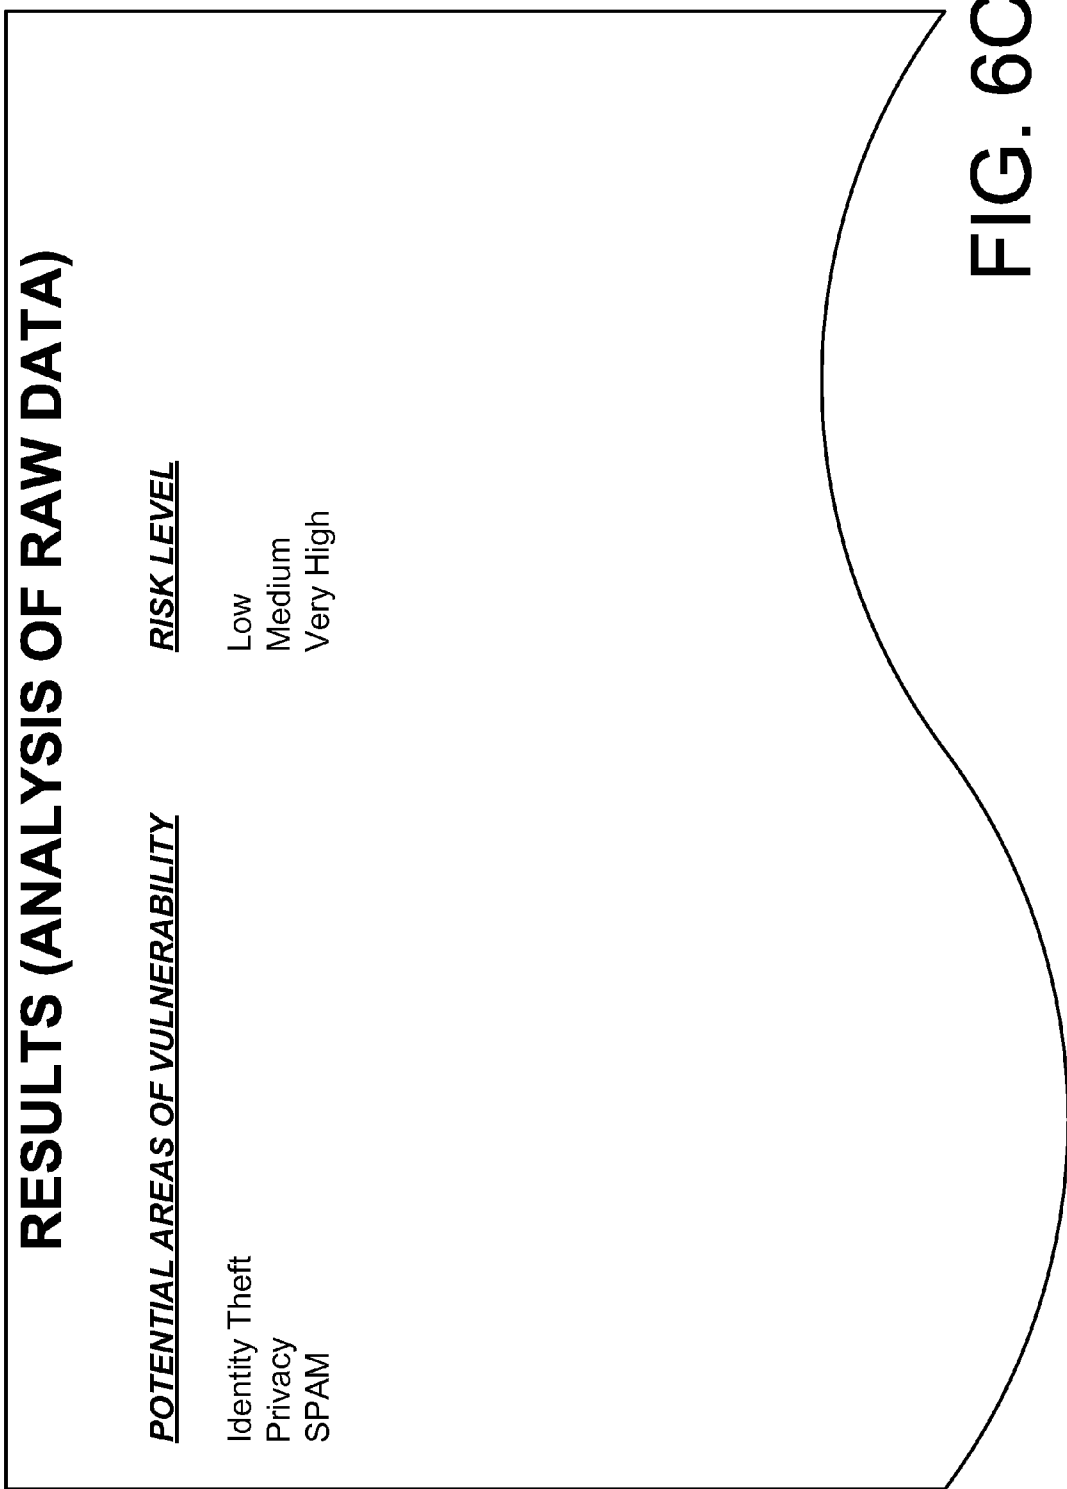

Your Telephone Number:
() -

Last 4 Digits of your Social Security Number:

Your Billing Address ZIP Code:

FIG. 7

METHODS, SYSTEMS, AND PRODUCTS FOR ASSESSING RISKS OF INTERNET SEARCHES

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application is a continuation of U.S. application Ser. No. 13/916,640 filed Jun. 13, 2013 and since issued as U.S. Pat. No. _____, which is a continuation of U.S. application Ser. No. 13/524,074 filed Jun. 15, 2012 and since issued as U.S. Pat. No. 8,489,593, which is a continuation of U.S. application Ser. No. 12/205,377 filed Sep. 5, 2008 and since issued as U.S. Pat. No. 8,229,926, which is a continuation of U.S. application Ser. No. 10/820,411 filed Apr. 8, 2004 and since issued as U.S. Pat. No. 7,433,864, with all these applications incorporated herein by reference in their entireties.

FIELD OF THE INVENTION

[0002] The present disclosure relates generally to data processing and, more particularly, to searching and compiling information.

BACKGROUND

[0003] Due to the ease of publishing material on the Internet (also referred to as the worldwide web or, simply, “the web”), the web has become a virtual storehouse for a variety of information. Of particular concern is personal information that is published on the web, such as, for example, an individual’s name, telephone number, email address, social security number, home address, etc. The reason for concern is that the published information poses a risk to the individual by exposing the individual to identity theft, unsolicited email (also referred to as “spam”), invasion of privacy, or other security concerns.

[0004] Given the plethora of information available on the web, it would be useful to be able to gather and effectively compile personal information in order to assess an individual’s vulnerability to the above-identified, and other, security concerns.

SUMMARY

[0005] The present disclosure provides systems and methods for compiling information obtained by combinatorial searching.

[0006] Briefly described, some embodiments, among others, include a search for sensitive information. Once a result of the search has been obtained, a score is assigned to the obtained result in accordance with a predefined criterion.

[0007] Other systems, devices, methods, features, and advantages will be or become apparent to one with skill in the art upon examination of the following drawings and detailed description. It is intended that all such additional systems, methods, features, and advantages be included within this description, and be within the scope of the present disclosure.

BRIEF DESCRIPTION OF THE DRAWINGS

[0008] Many aspects of the disclosure can be better understood with reference to the following drawings. The components in the drawings are not necessarily to scale, emphasis instead being placed upon clearly illustrating the principles of

the present disclosure. Moreover, in the drawings, like reference numerals designate corresponding parts throughout the several views.

[0009] FIG. 1 is a block diagram showing an embodiment of a system for performing a combinatorial search and compiling the results of the search.

[0010] FIG. 2 is a block diagram showing an embodiment of components of the memory of FIG. 1, which are configured to perform the combinatorial search and the information compilation.

[0011] FIG. 3 is a flowchart showing an embodiment of a method for performing a combinatorial search and compiling the results of the search.

[0012] FIG. 4 is a flowchart showing, in greater detail, the step of searching for sensitive information, from FIG. 3.

[0013] FIG. 5 is a flowchart showing, in greater detail, the step of assigning the score, from FIG. 3.

[0014] FIG. 6A is an embodiment of a report showing results obtained from the search.

[0015] FIG. 6B is another embodiment of a report showing results obtained from the search.

[0016] FIG. 6C is an embodiment of a report showing compiled results.

[0017] FIG. 7 is an embodiment of a graphical user interface (GUI) that permits user entry of information.

DETAILED DESCRIPTION OF THE EMBODIMENTS

[0018] Reference is now made in detail to the description of the embodiments as illustrated in the drawings. While several embodiments are described in connection with these drawings, there is no intent to limit the invention to the embodiment or embodiments disclosed herein. On the contrary, the intent is to cover all alternatives, modifications, and equivalents.

[0019] As noted above, it is useful to be able to gather and compile sensitive information in order to assess an individual’s vulnerability to various security concerns. One approach, among others, to assessing an individual’s vulnerability to various security concerns is to emulate the behavior of a would-be spammer or other Internet delinquent. As described in greater detail below, in some embodiments, among others, a spammer’s behavior is emulated by searching for sensitive information, and generating a report from the results of the search. For some embodiments, the search is conducted in accordance with various search criteria. In generating the report, the results of the search are assigned various scores or weights, which are then analyzed to determine an individual’s vulnerability to various security concerns.

[0020] Embodiments of systems and methods are described below with reference to FIGS. 1 through 6C.

[0021] FIG. 1 is a block diagram showing an embodiment of a system for performing a combinatorial search and compiling the results of the search. As shown in FIG. 1, in one embodiment, among others, the system is implemented by a personal computer 110 (also referred to herein as a workstation). The workstation 110 includes a processor 130, memory 150, a local storage device 160 (e.g., hard drive, removable floppy drive, compact disc drive, digital versatile disc drive, etc.), and a network interface 140, all communicating over a bus 170. The memory 150 typically includes the operating system (not shown), which is typically stored in non-volatile memory while the computer 110 is turned off, and loaded into volatile memory upon start-up, where it can be executed by

the processor **130**. In the present embodiment, the computer **110** is configured to communicate over a network, such as the Internet, through an I/O device, such as, for example, an analog modem, DSL modem, ISDN modem, ethernet card, etc., which may be connected to the computer **110** through the network interface **140**. Since the general operation of personal computers is known in the art, further discussion of the general operation of the personal computer **110** is omitted here.

[0022] FIG. 2 is a block diagram showing an embodiment of components of the memory **150** of FIG. 1. In the embodiment of FIG. 2, those components are configured to search for sensitive information and compile any obtained search results. As shown in FIG. 2, in one embodiment, among others, the memory **150** includes a combinatorial analysis program **260** (also referred to simply as “the program **260**”), which searches for sensitive information in accordance with one or more search criteria. In one embodiment, among others, the program **260** searches the contents of Internet web pages using web crawlers that are known in the art. Since various approaches to searching Internet web pages are known in the art, further discussion of web-crawlers, and similar programs, is omitted here. It should also be appreciated that the duration and scope of the search may be specified in accordance with known techniques, such as those employed by various web-crawlers.

[0023] Additionally, the program **260** compiles any results that may be obtained from the search. Specifically, for some embodiments, the program **260** searches for sensitive information, such as, for example, a name, an email address, a telephone number, a street address, a social security number, and/or any other sensitive information. As is known, a user may explicitly provide the set of sensitive information. Alternatively, the set of sensitive information may be obtained from a predefined list. In some embodiments, among others, the search is performed on the Internet or other networks, which may exhibit sensitive information. The program **260** is configured to obtain the results of the search and assign scores to the obtained results. In some embodiments, the scores are assigned in accordance with one or more weighting factors or scoring criteria. Upon assigning scores to the obtained results, the program **260** is configured to generate a report.

[0024] Once loaded into memory **150**, the program **260** manifests itself as logical components within memory **150**. These logical components include search logic **205**, result logic **230**, and score logic **235**. Each of the logic components corresponds to a computer-readable code (e.g., a routine or a sub-routine) within the program **260**. As such, the search logic **205** is configured to search for sensitive information in accordance with predetermined search criteria. The criteria can include, for example, a name of an individual, an email address, a social security number, a telephone number, a street address, or any other personal information associated with an individual. Additionally, the criteria can include one or more combinations of the individual items listed above.

[0025] In that regard, the search logic **205** can be further segmented into itemized search logic **210** and combined search logic **220**. The itemized search logic **210** includes logic components **215a** . . . **215n** that are each configured to search for a particular item. For example, the first item search logic **215a** can be configured to search for a name, while a second item search logic **215n** can be configured to search for an email address, and so on. It should be appreciated that the search logic **205** instructs the processor **130** to search in

accordance with predefined criteria. For example, email addresses may be searched by defining a text string to include a single “@” located within a contiguous string of characters. Similarly, social security numbers may be searched by defining a text string to include a nine-digit number with two interposed dashes (“-”) after the third digit and the fifth digit, respectively.

[0026] The combined search logic **220** includes logic components **225a** . . . **225n** that are each configured to search for various combinations of items. For example, the first combined search logic **225a** can be configured to search for occurrences in which both a name and a social security number appear within the same document (e.g., within a single web page, within a single data file, etc.). Likewise, a second combined search logic **225n** can be configured to search for occurrences in which both a social security number and a telephone number appear within the same document. It should be appreciated that a user can define the individual items, or, alternatively, the items can be obtained from a predefined list of items. Similarly, it should be appreciated that the user can define the permutations and combinations for the various combined searches.

[0027] In addition to performing a direct string search, it should be appreciated that the search can be modified to include variants of sensitive information. For example, a search for the name “Bob Smith” can include the variants “Robert Smith,” “B. Smith,” “R. Smith,” etc. Likewise, a search for a social security number may appear as a string search for “123-45-6789” or “123456789.” Since one having skill in the art should understand how to define the variants of sensitive information, further discussion of such variants, and approaches to defining such variants, is omitted here.

[0028] The result logic **230** is configured to obtain the results of the search, while the score logic **235** is configured to assign a score to the obtained results. Since, for some embodiments, the search can result in obtaining individual items as well as combined items, the score logic **235** can be further segmented into itemized score logic **240** and combinatorial score logic **250**. The itemized score logic **240** is configured to assign a score to the itemized search results, while the combinatorial search logic **250** is configured to assign a score to the combined search results. Since multiple individual items, as well as multiple combinations, can be searched, the itemized score logic **240** can further be divided into scoring logic **245a** . . . **245n** for each item. Similarly, since multiple combinatorial searches can be performed, the combinatorial search logic **250** can be further divided into scoring logic **255a** . . . **255n** for each combination.

[0029] Having described an embodiment of a system for searching for sensitive information and analyzing the results, attention is turned to FIGS. 3 through 5, which show various embodiments of methods to search for and compile sensitive information.

[0030] FIG. 3 is a flowchart showing an embodiment of a method for performing a combinatorial search and compiling the results of the search. As shown in FIG. 3, one embodiment, among others, begins with the step of searching (**310**) for sensitive information. As noted above, the sensitive information can include personal information associated with an individual, as well as variants of that personal information. Typically, the sensitive information is searched in accordance with defined search criteria. The process continues by obtaining (**320**) the results of the search, and assigning (**330**) scores to the obtained results. The scores are assigned in accordance

with a predefined weighting factor. Upon assigning (330) scores to the obtained results, the process generates (340) a report of the scores.

[0031] The embodiment shown in FIG. 3 largely mimics the behavior of Internet delinquents, who search for sensitive information in order to compile spam lists or other noxious databases. As such, the generated report provides a relatively good representation of an individual's vulnerability to various security concerns.

[0032] FIG. 4 is a flowchart showing, in greater detail, the step of searching (310) for sensitive information, from FIG. 3. As shown in FIG. 4, the step of searching (310) for sensitive information comprises, in some embodiments, the step of determining (410) the items of information for searching. The items of information can include a name, a social security number, an email address, a telephone number, a street address, a credit card number, and/or other sensitive information. The items of information can be determined (410) by obtaining user input, or, alternatively, by obtaining a predefined list from a database. For embodiments that obtain user input, that input can be provided through a graphical user interface (GUI) with various input boxes. For example, when the GUI is provided to the user, the user can input a name, a social security number, an email address, a street address, and/or a variety of other information. One example of a GUI is provided in FIG. 7. The GUI of FIG. 7 provides a mechanism for inputting a telephone number, the last four digits of a social security number, and a zip code. However, it should be appreciated that other fields may be provided for the GUI. Since such GUIs are known in the art, further discussions of these, and other user-input mechanisms, are omitted here. It should also be appreciated that the GUI can be implemented as a web page that is remotely accessible, or, alternatively, the GUI can be provided as a local client application. Additionally, it should be appreciated that, should a user input a finite amount of unique information about that user, the system can be configured to access a pre-existing database that has additional information related to that user. Thus, for example, when a user inputs the telephone number and the zip code into the GUI of FIG. 7, that information can be used to retrieve the user's name, address, email, etc.

[0033] Upon determining (410) the items of information for searching, the process selects (420) the first item of information, and searches (430) for the selected item. In some embodiments, the search is performed on the Internet. Upon completing the search, the process determines (440) whether or not all items of information have been searched. If there are additional items to be searched, then the process selects (450) the next item of information, and searches (430) for that selected item. This process iteratively repeats itself until all items of information have been searched. It should be appreciated that the selection of an item can also include the selection of a combination of items. Since the modification of the flow of FIG. 4 to accommodate such a combined search is apparent to one having skill in the art, further discussion of such a modification is omitted here.

[0034] Using a specific example, given a closed list of items, which includes name, social security number, email address, street address, and a telephone number, a user can assign the following parameters to the items:

[0035] Name: Bob Smith

[0036] Social Security Number: 123-45-6789

[0037] Email Address: bsmith@bob.smith.com

[0038] Telephone Number: (404) 555-1234

[0039] Street Address: 123 Peachtree Street

[0040] Given these items of information, the process selects "Bob Smith" as the first item of information, and searches the Internet for "Bob Smith." Upon completing the search, the process selects "123-45-6789" for searching, since all items on the list have not yet been exhausted from the list. Once "123-45-6789" has been searched, "bsmith@bob.smith.com" is selected and searched, and so on until the last item, "123 Peachtree Street" has been selected and searched. Thereafter, the process continues to obtaining (320) the results of the search. It should be appreciated that the obtaining (320) of the results and the searching (310) for each item takes place in an alternating fashion. For example, typically, a first search is followed by a first result, a second search is followed by a second result, and so on.

[0041] In addition to searching the individual items, the items can be combined for searching. For example, the process may select ("Bob Smith" AND "bsmith@bob.smith.com"), using the Boolean "AND" operation. Likewise, the street address and telephone number can be combined using Boolean operators. As one can appreciate, any number of combinations of items can be searched.

[0042] Furthermore, while "Bob Smith" is provided as the "Name," it should be appreciated that variants, such as, for example, "B. Smith," "Robert Smith," "R. Smith," etc. can easily be substituted. For some embodiments, the variants can be substituted manually. For other embodiments, the variants can be obtained from a database that lists common variants. For example, a database that stores common variants can be stored at a server, thereby providing access to the database to any client that is communicatively coupled to the server. As another example, the database may be a local database that stores common variants. For yet other embodiments, a computer program that generates such variants can be utilized to produce the variants. Since programs that determine various permutations of names are known in the art, further discussion of such programs is omitted here.

[0043] FIG. 5 is a flowchart showing, in greater detail, the step of assigning (330) the score, from FIG. 3. As shown in FIG. 5, once the results of the search have been obtained (320), the process selects (510) the first result, and assigns (520) an individual score to the selected result in accordance with a predefined criterion. Thereafter, the process determines (530) whether or not scores have been assigned to all of the results. If the score has not been assigned to all of the results, then the next result is selected (540) and the process repeats until all of the items have been assigned a score. Once all of the items have been assigned a score, the process calculates (550) a combinatorial score as a function of each of the individual scores.

[0044] In some embodiments, the score can be a direct reflection of the number of occurrences of the item. For example, as shown in FIGS. 6A through 6C, if a search for "Bob Smith" resulted in 34 occurrences, then the score for "Bob Smith" would be 34. While such a direct approach is implemented in a preferred embodiment, it should be appreciated that a score can be assigned based on a variety of factors. For example, in the context of the Internet, the presence of an email address on the Internet may be a commonplace occurrence, while the presence of a social security number may be a rarer occurrence. Thus, a single occurrence of a social security number may be assigned a greater significance than, say, five occurrences of an email address.

[0045] Similarly, a web site that has both name and the social security number may be assigned a greater weight or score, since that combinatorial occurrence poses a greater vulnerability for an individual. It should also be appreciated that, in addition to combinations, the proximity of the occurrences may provide different scores or weights. For example, a name that is located within five characters of a telephone number may be given a greater weight than a name that is located more than 5,000 characters from a telephone number, since a closer proximity suggests that the two are likely correlated.

[0046] In a preferred embodiment, the following combinations can be given a heightened score due to their corresponding risks:

[0047] An email address alone poses a risk of spam. With each occurrence of the email address, the risk of spam increases.

[0048] A name in conjunction with a social security number poses a high risk of identity theft. That risk increases when the name and the social security number are located in close proximity (e.g., within five characters) of each other.

[0049] A name and a street address, or a name and a telephone number, in combination poses a privacy risk, insofar as an individual's contact information is readily available.

[0050] In addition to the above-defined risks, a "linking" site may further heighten the score due to heightened security concerns. In other words, a search may produce two distinct web sites, each of which are benign, in and of themselves. However, the combination of results may produce a heightened risk. For example, a search may result in two web sites: one that shows a combination of a name and an email address; and another that shows a combination of the email address and a social security number. Each of the web sites is relatively benign. However, since the two sites, combined, provide a link between the name and the social security number, the combination of the results may be given a heightened score due to the increased risk of identity theft.

[0051] As one can appreciate, the scoring of the results can be implemented in a variety of ways, depending on the security risks that are sought to be uncovered. Since those having skill in the art should appreciate the various approaches to assigning weights or scores to the obtained results, further discussion of the various approaches is omitted here.

[0052] FIGS. 6A through 6C shown an embodiment of a report showing results obtained from the search. Specifically, FIGS. 6A through 6C show the results of the example illustrated above. As shown in FIG. 6A, the results can include the various scores for the individual items, such as, name, social security number, email address, telephone number, and street address. Since the illustrated example uses "Bob Smith" for the name, "123-45-6789" for the social security number, "bsmith@bob.smith.com" for the email address, "(404) 555-1234" for the telephone number, and "123 Peachtree Street" for the street address, the individual items of FIG. 6A reflect those specifically searched items. In that example, the search uncovered 34 occurrences of the name, 0 occurrences of the social security number, 842 occurrences of the email address, 4 occurrences of the telephone number, and 2 occurrences of the street address.

[0053] FIG. 6B shows scores that have been assigned to combined items. For example, the results of FIG. 6B show that, of the 34 occurrences of the name, 28 occurrences coincided with an email address. In other words, in the context of the Internet, there were 28 web sites that included both the

name and the email address. Since the remaining combinations are self-evident in FIG. 6B, the reader is directed to FIG. 6B without further discussion of the combined items.

[0054] Given the results of FIGS. 6A and 6B, a final analysis of the results is shown in FIG. 6C. For this embodiment, only three areas of vulnerability are shown: identity theft, privacy, and spam. However, it should be appreciated that, for other embodiments, additional areas of vulnerability may be added as a function of the individually searched and obtained items. For FIG. 6C, since no occurrences resulted from the search of the social security number, the risk of identity theft is relatively low. Also, since the name appears in combination with the telephone number as well as the street address, there is a privacy risk. However, due to the relatively low number of occurrences, there is only a moderate risk to the privacy concerns of "Bob Smith." Due to the enormous number of occurrences for the email address (832 total occurrences), the report shows that "Bob Smith" has a very high risk of receiving spam.

[0055] As shown in the embodiments of FIGS. 1 through 6C, by performing a search for sensitive information and generating a report of the obtained results, an individual can assess the level of vulnerability in various areas. Once the level of vulnerability has been assessed, the individual can take appropriate action to ameliorate the risks.

[0056] The search logic 205, the result logic 230, the score logic 235, the itemized search logic 210, the combined search logic 220, the itemized score logic 240, the combinatorial search logic 250, and their various logic components 215a . . . 215n (or simply 215), 225a . . . 225n (or simply 225), 245a . . . 245n (or simply 245), and 255a . . . 255n (or simply 255) may be implemented in hardware, software, firmware, or a combination thereof. In the preferred embodiment(s), the search logic 205, the result logic 230, the score logic 235, the itemized search logic 210, the combined search logic 220, the itemized score logic 240, the combinatorial search logic 250, and their various logic components 215, 225, 245, and 255 are implemented in software or firmware that is stored in a memory and that is executed by a suitable instruction execution system. If implemented in hardware, as in an alternative embodiment, the search logic 205, the result logic 230, the score logic 235, the itemized search logic 210, the combined search logic 220, the itemized score logic 240, the combinatorial search logic 250, and their various logic components 215, 225, 245, and 255 can be implemented with any or a combination of the following technologies, which are all well known in the art: a discrete logic circuit(s) having logic gates for implementing logic functions upon data signals, an application specific integrated circuit (ASIC) having appropriate combinational logic gates, a programmable gate array(s) (PGA), a field programmable gate array (FPGA), etc.

[0057] Any process descriptions or blocks in flow charts should be understood as representing modules, segments, or portions of code which include one or more executable instructions for implementing specific logical functions or steps in the process, and alternate implementations are included within the scope of the preferred embodiment of the present invention in which functions may be executed out of order from that shown or discussed, including substantially concurrently or in reverse order, depending on the functionality involved, as would be understood by those reasonably skilled in the art of the present invention.

[0058] The combinatorial analysis program 260 program, which comprises an ordered listing of executable instructions

for implementing logical functions, can be embodied in any computer-readable medium for use by or in connection with an instruction execution system, apparatus, or device, such as a computer-based system, processor-containing system, or other system that can fetch the instructions from the instruction execution system, apparatus, or device and execute the instructions. In the context of this document, a “computer-readable medium” can be any means that can contain, store, communicate, propagate, or transport the program for use by or in connection with the instruction execution system, apparatus, or device. The computer-readable medium can be, for example but not limited to, an electronic, magnetic, optical, electromagnetic, infrared, or semiconductor system, apparatus, device, or propagation medium. More specific examples (a nonexhaustive list) of the computer-readable medium would include the following: an electrical connection (electronic) having one or more wires, a portable computer diskette (magnetic), a random access memory (RAM) (electronic), a read-only memory (ROM) (electronic), an erasable programmable read-only memory (EPROM or Flash memory) (electronic), an optical fiber (optical), and a portable compact disc read-only memory (CDROM) (optical). Note that the computer-readable medium could even be paper or another suitable medium upon which the program is printed, as the program can be electronically captured via, for instance, optical scanning of the paper or other medium, then compiled, interpreted or otherwise processed in a suitable manner if necessary, and then stored in a computer memory.

[0059] Although exemplary embodiments have been shown and described, it will be clear to those of ordinary skill in the art that a number of changes, modifications, or alterations to the invention as described may be made. For example, while a personal computer **110** is shown as an example embodiment of a system, it should be appreciated that the system can be implemented using other programmable devices, such as, for example, a personal digital assistant (PDA), an Internet-capable cellular telephone, etc.

[0060] It should also be appreciated that, while various server-based systems, client-based systems, and computer-readable media are disclosed, the program and logic components that execute the various functions of the program can be located either server-side or client-side. Also, it should be appreciated that the various components can be located within a distributed networking environment. Since distributed networks, as well as client-server environments, are known in the art further discussions of distributed networks and client-server environments is omitted here.

[0061] Additionally, it should be appreciated that the disclosed systems and methods can be provided as a service to various subscribers. Thus, for those embodiments, a user can purchase combinatorial-search services, as disclosed above, from a service provider. That service provider will subsequently provide the results of the combinatorial search for a fee. For some embodiments, the services can be subscribed to over a web interface. For other embodiments, the services can also be subscribed to over the telephone, where the relevant information is provided over the telephone.

[0062] For some embodiments, rather than purchasing services for combinatorial searches, a user can purchase a software product that performs the combinatorial search. In that regard, the software can be purchased as a computer-readable medium, as described above, or downloaded from a web-site in accordance with known techniques. In still other embodiments, the combinatorial search may be packaged as a com-

bination of a product and a service. For example, a user can purchase software that provides access to services from a combinatorial-search service provider.

[0063] All such changes, modifications, and alterations should therefore be seen as within the scope of the disclosure.

1. A method, comprising:
 - generating, by a processor, an electronic request for a search of electronic web pages, the electronic request specifying a name of an individual as a search term;
 - sending, from a network interface under direction of the processor, the electronic request into a network for the search of the electronic web pages;
 - receiving, at the network interface, an electronic listing of search results of the search, the electronic listing of the search results including a score for each search result in the electronic listing of the search results, the score based on a number of occurrences of the search term within each search result;
 - selecting, by the processor, a combination of different search results in the electronic listing of the search results;
 - determining, by the processor, a combinatorial score associated with the combination of the different search results; and
 - determining, by the processor, a security risk associated with the name of the individual based on the score and on the combinatorial score associated with the combination of the different search results.
2. The method of claim 1, further comprising selecting the name of the individual from a listing of search terms.
3. The method of claim 2, further comprising selecting the name of the individual from sensitive terms in the listing of search terms.
4. The method of claim 1, further comprising querying a database for an additional search term having a database association to the name of the individual.
5. The method of claim 1, further comprising retrieving additional search results for the additional search term having the database association to the name of the individual.
6. The method of claim 1, further comprising querying a database for a variant of the name of the individual.
7. The method of claim 6, further comprising retrieving additional search results for the variant of the name of the individual.
8. A system, comprising:
 - a processor; and
 - a memory storing code that when executed causes the processor to perform operations, the operations comprising:
 - retrieving an electronic listing of different search terms chosen by a user;
 - selecting, from the electronic listing of the different search terms, different combinations of the different search terms;
 - generating electronic requests for searches of electronic web pages, each one of the electronic requests specifying a combination of the different combinations of the different search terms;
 - sending the electronic requests into a network for the searches of the electronic web pages;
 - receiving electronic search results of the searches;
 - generating scores for the electronic search results of the searches, each one of the scores based on a number of

occurrences in an electronic search result for a corresponding one of the different combinations of the different search terms;
 selecting a combination of the scores for the different combinations of the different search terms;
 determining a combinatorial score for the combination of the scores for the different combinations of the different search terms; and
 determining a security risk associated with the user based on the scores and on the combinatorial score.

9. The system of claim 8, wherein the operations further comprise selecting the electronic listing of different search terms from sensitive terms defined by the user.

10. The system of claim 8, wherein the operations further comprise querying a database for an additional search term having a database association to one of the different search terms.

11. The system of claim 10, wherein the operations further comprise retrieving additional search results for the additional search term having the database association to the one of the different search terms.

12. The system of claim 8, wherein the operations further comprise querying a database for a variant having a database association to one of the different search terms.

13. The system of claim 12, wherein the operations further comprise retrieving additional search results for the variant having the database association to one of the different search terms.

14. The system of claim 8, wherein the operations further comprise retrieving user-defined combinations of the different search terms.

15. A memory device storing instructions that when executed cause a processor to perform operations, the operations comprising:

- retrieving an electronic listing of different search terms chosen by a user;
- selecting, from the electronic listing of the different search terms, different combinations of the different search terms;

generating electronic requests for searches of electronic web pages, each one of the electronic requests specifying a combination of the different combinations of the different search terms;

sending the electronic requests into a network for the searches of the electronic web pages;

receiving electronic search results of the searches;

generating scores for the electronic search results of the searches, each one of the scores based on a number of occurrences in an electronic search result for a corresponding one of the different combinations of the different search terms;

selecting a combination of the scores for the different combinations of the different search terms;

determining a combinatorial score for the combination of the scores for the different combinations of the different search terms; and

determining a security risk associated with the user based on the scores and on the combinatorial score.

16. The memory device of claim 15, wherein the operations further comprise selecting the electronic listing of different search terms from sensitive terms defined by the user.

17. The memory device of claim 15, wherein the operations further comprise querying a database for an additional search term having a database association to one of the different search terms.

18. The memory device of claim 17, wherein the operations further comprise retrieving additional search results for the additional search term having the database association to the one of the different search terms.

19. The memory device of claim 15, wherein the operations further comprise querying a database for a variant having a database association to one of the different search terms.

20. The memory device of claim 15, wherein the operations further comprise retrieving user-defined combinations of the different search terms.

* * * * *